CROMATIX®
Lighting Intelligence

CATALOG
Architectural
Lighting Series

CROMATIX CHILE | Showroom
Las Condes Design, Av. Las Condes 9765, Local N°220,
Las Condes, Santiago, Chile.

CROMATIX CHILE | Office - Warehouse
Av. Américo Vespucio 876, Peñalolén,
Santiago, Chile.

CROMATIX CHINA | Factory - Showroom
No. 36 Donhailiu Road, Donfeng Town
Zhongshan, China

中山市科麦思熙明电器有限公司
地址:广东省中山市东风镇东海穴路36号
电话:86- (0)746-22182164
郵箱: **sales@cromatix-lighting.com**
网站: **www.cromatix-lighting.com**

CERTIFIED QUALITY

High-Standard Components and **International Certification**

We work with leading brands such as Osram, Tridonic, CREE, Lifud, Epistar, Boke, and Everlight, ensuring efficiency and durability. Our products hold global certifications including CE, ETL/c-ETL-us, RoHS, SASO, CCC, CQC, Energy Saving, and Energy Star, and every unit is backed by a 5-year warranty.



CROMATIX®
Lighting Intelligence

Lighting is more than a technical requirement — it is the invisible language that transforms architecture. A thoughtful lighting design highlights shapes, brings materials to life, and creates emotions that remain in memory.

At CROMATIX®, we believe light is intelligence applied to design
— LIGHTING INTELLIGENCE —
because it reveals details, enhances aesthetics, and creates unique experiences within every space.

OUR EXPERTISE

Technical Architectural **Lighting Manufacture**

At CROMATIX®, we design, develop, and manufacture professional lighting solutions for the most demanding architectural projects. Our portfolio is structured around specialized product series — XLINE (linear systems), XCURVE & XRING (curved lighting), XPANEL (LED panels), OPTICS (spotlights), and XTUBE (tubular fixtures).

Each series is available in suspended, surface, or recessed mounting options, combining innovation, quality, and precision to transform spaces and enhance architecture.



ABOUT US

企业简介

At CROMATIX®, we design, develop, and manufacture professional architectural lighting systems built on innovation, quality, and trusted expertise. From the beginning, our philosophy has been clear: to deliver lighting solutions that ensure comfort, highlight design, and exceed expectations.

Our portfolio includes linear, curved, circular, panel, spotlight, and tubular systems, with versatile mounting options such as suspended, surface-mounted, recessed, and wall-mounted. Every unit is produced under strict quality management, backed by international certifications (CE, RoHS, ETL/c-ETL, FCC) and a 5-year warranty.

We manufacture with reliable electronic components from leading brands such as Osram, Tridonic, CREE, Lifud, Everlight, among others, ensuring performance, durability, and safety in every product. Together with a strong in-house R&D team, continuous laboratory testing, and a production capacity of over 10,000 units per month, we guarantee consistency, innovation, and long-term value.

Today, with our headquarters in Chile and our factory in Zhongshan, we operate as a global brand, supporting projects and partners across diverse markets. More than a manufacturer, we are a partner for ambitious projects, offering tailored solutions, technical expertise, and long-term reliability.

在 CROMATIX®，我们基于创新、品质和值得信赖的专业知识，设计、开发和制造专业的建筑照明系统。从一开始，我们的理念就很明确：提供确保舒适、突出设计并超越期望的照明解决方案。

我们的产品组合包括线性、弧形、圆形、面板、聚光灯和管状系统，提供灵活的安装选项，例如悬挂式、表面安装式、嵌入式和壁挂式。每台设备均在严格的质量管理下生产，并获得国际认证（CE、RoHS、ETL/c-ETL、FCC）和 5 年保修的支持。

我们采用欧司朗（Osram）、特瑞德（Tridonic）、科锐（CREE）、莱福德（Lifud）、亿光（Everlight）等领先品牌的可靠电子元件进行制造，确保每款产品的性能、耐用性和安全性。我们强大的内部研发团队、持续的实验室测试以及每月超过 10,000 台的生产能力，共同保证了产品的一致性、创新性和长期价值。

如今，我们的总部设在智利，工厂位于中山，我们作为一个全球品牌运营，为不同市场的项目和合作伙伴提供支持。我们不仅仅是一家制造商，更是雄心勃勃的项目的合作伙伴，提供定制化解决方案、技术专长和长期可靠性。







Designing ENGINEERING **Manufacturing**





Lighting Solutions for Every Project

项目照明全方案

At CROMATIX®, we have the capacity to meet the needs of diverse projects and clients. From supplying products for specific architectural requirements to providing large-scale volumes for distributors and wholesalers, we adapt to different markets with efficiency and reliability.

Our strength lies in combining flexibility, innovation, and quality, ensuring that every project — whether unique or large-scale — receives the right lighting solution.





Global Presence, International Exhibitions

项目照明全方案

At CROMATIX®, we have the capacity to meet the needs of diverse projects and clients. From supplying products for specific architectural requirements to providing large-scale volumes for distributors and wholesalers, we adapt to different markets with efficiency and reliability.

Our strength lies in combining flexibility, innovation, and quality, ensuring that every project — whether unique or large-scale — receives the right lighting solution.



WORLDWIDE SHIPPING

& PARTENERSHIPS

Areas of expertise

HOSPITALITY · EDUCATION · HEALTHCARE · RESIDENTIAL · AUTOMOTIVE · GASTRONOMY · RETAIL · CORPORATE



Become a CROMATIX Partner

成为 CROMATIX 合作伙伴

Join our network and bring our lighting products to your market. We offer international shipping by air and sea to the agreed destination, with customs clearance, import processes, and goods collection managed according to local regulations (customer responsibility). With our strong production capacity, reliable lead times, and dedicated support, we make sure our products reach you efficiently and safely.

More than shipping, we provide the confidence of a global brand, ensuring that your business can count on consistent quality and supply.

CROMATIX CHILE | Showroom
Las Condes Design, Av. Las Condes 9765, Local N°220, Las Condes, Santiago, Chile.

CROMATIX CHILE | Office - Warehoure
Avenida Americo Vespucio 896, Peñalolen, Santiago, Chile.

CROMATIX CHINA | Factory - Showroom
No.36, Donghailiu Road, Dongfeng Town, Zhongshan city Guangdong, China.

INDEX


XPANEL SLIM SERIES
21-40

SUSPENDED | SURFACE




XPANEL FLAT SERIES
41-64

SUSPENDED | SURFACE

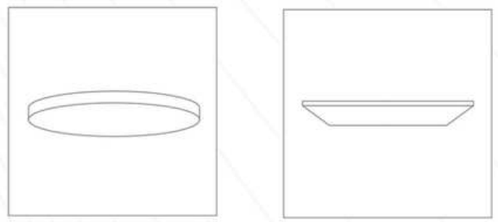


XPANEL SERIES
65-96

SUSPENDED | SURFACE

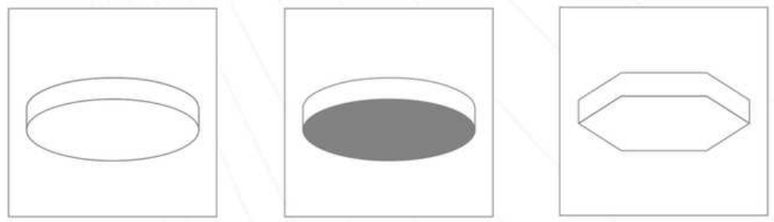


XCURVE & XRING SERIES
97-142

SUSPENDED | SURFACE

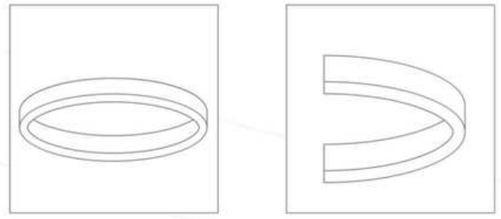


XLINE SERIES
142-240

SUSPENDED | SURFACE

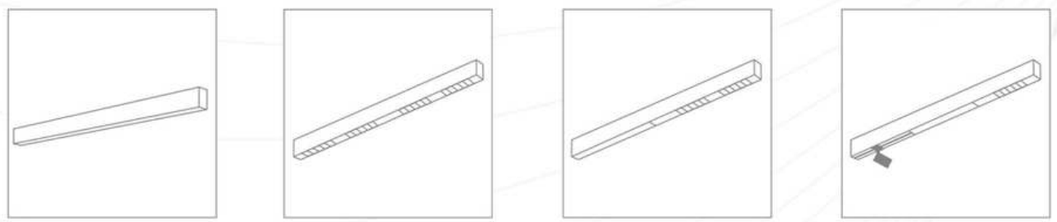

RECESSED

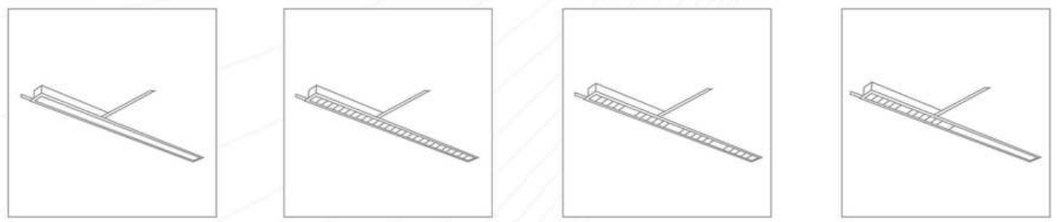


INDEX

XTUBE SERIES

241-254


HORIZONTAL SUSPENSION | VERTICAL SUSPENSION

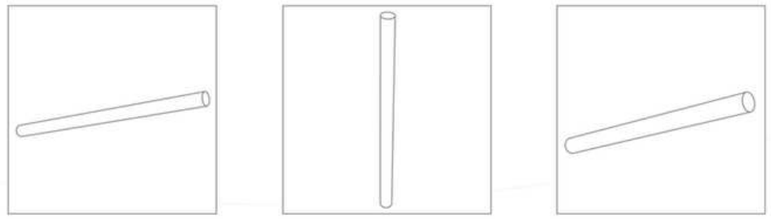

OPTICS SERIES

255-294

SURFACE | RECESSED | WALL WASHER

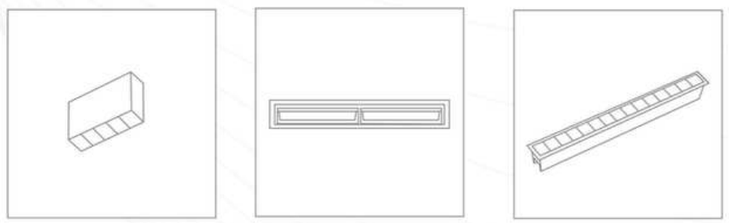

CROMATIX®
Lighting Intelligence

Lighting solutions for every project

CROMATIX® was born from a deep passion for lighting and a vision to empower architecture through systems that connect design, technology, and human experience. From the beginning, we understood that light has the power to transform spaces and create meaningful connections, enhancing the way people interact with and experience their surroundings.

The X at the heart of our name represents that intersection: the connection between people, projects, ideas, and systems. We design and manufacture architectural lighting solutions that combine innovation, quality, and adaptability, providing architects, designers, and builders with the tools to bring distinctive and purposeful spaces to life.

Today, with a global presence, we continue to advance our mission of developing high-performance lighting systems that strengthen human and architectural connections, building lasting partnerships and creating value in every project we illuminate.

Empowering conneXions
between architecture, light,
and people







1. Transtel Nayax Offices | Architecture: Espiral Architecture | 2. Kia Showroom | Architecture: Indigo Arquitectos | Concept Design: KIA Corea. | 3. CEN Offices | Architecture: Jorge Iglesis | Interior Design: OArquitectos. 1 Lighting Design: Diseño de Luz.










1. Lonco House | Lighting Design: Soledad Newman | 2. BASH Vespucio Showroom | Architecture: WORKPLACES.
3. Transtel Nayax Offices | Architecture: Espiral Architecture | 4. Medical Center Bradfor Hill. | Architecture: Cristian Maze.



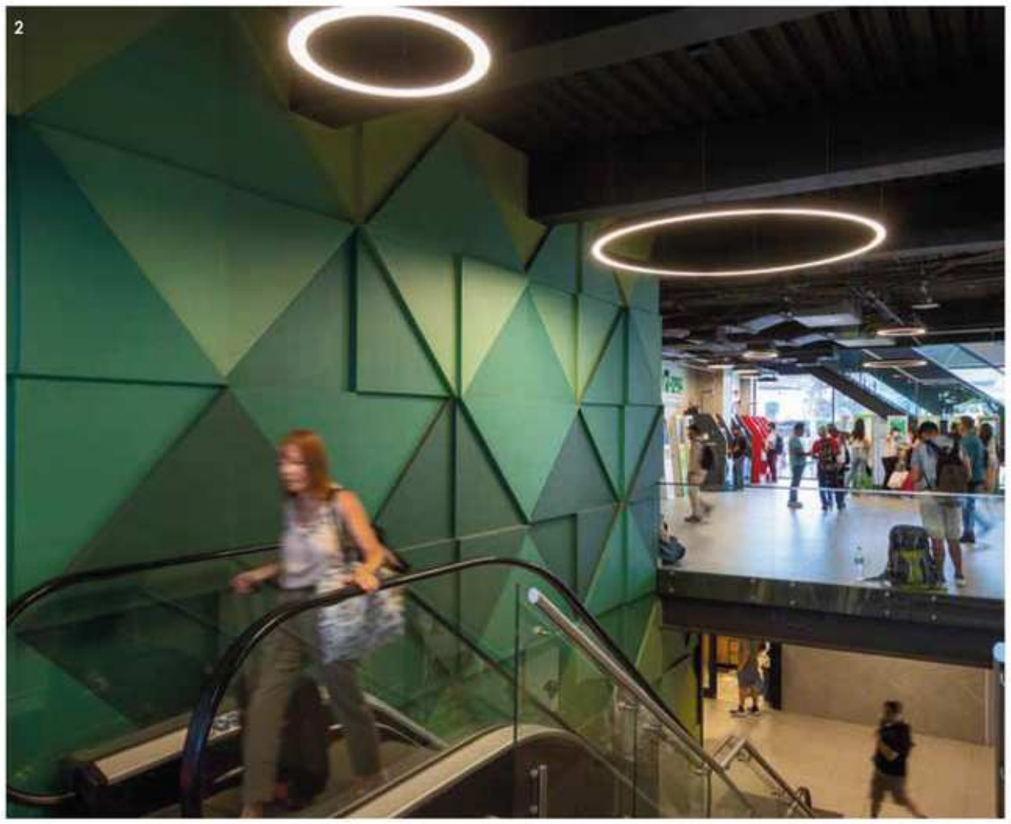


1 y 2. Turbus Bus Station | Architecture: Estudio FES | Lighting Design: Diseño de Luz.





1. Bubble Gummers | Lighting Design: Matte Iluminacion. | 2. MK Studio | Lighting Design: Luz + Diseño - Gaspar Arenas.

NEW
XFLOOR

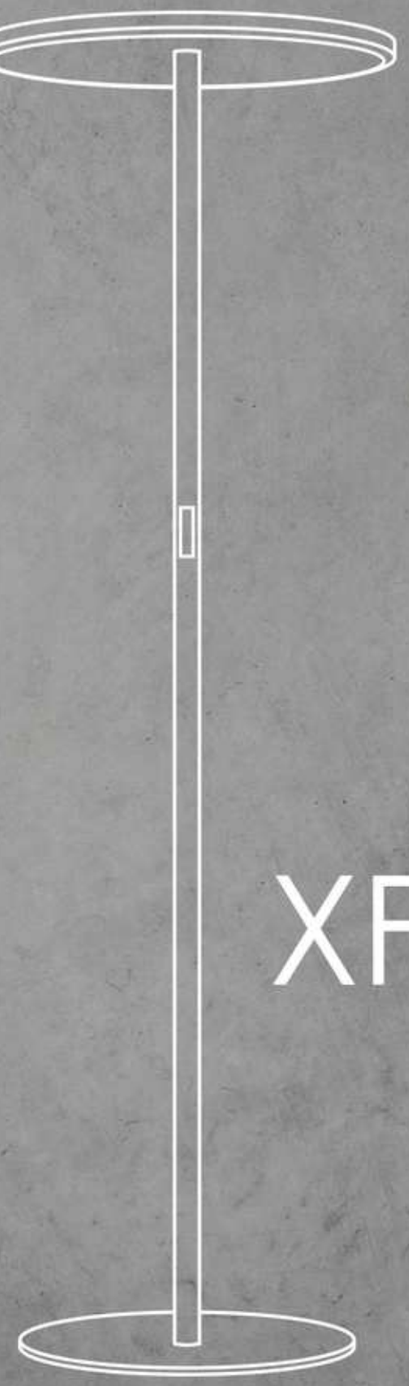

XFLOOR
SERIES

FLOOR LAMP

XFL2017

FLOOR LAMP



TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XFL2017-600PM	600*1963mm	40W	6800lm	4000lm





Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XFL2017-600PMU	600*1963mm	80W	13600lm	8000lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None

DETAIL 细节





PRODUCT FEATURE 产品特点


Floor-standing luminaire with round aluminium housing, rolled profile, seamless surface powder coated in white, grey, dark grey, black, beige or dark brown; Ø600 mm circular light panel and an overall height of 1963 mm.

Available in direct (Down) and direct/indirect (Up & Down) lighting configurations. Microprismatic diffuser for glare-free office lighting with an optimum UGR value of ≤19. Its design allows different lighting concepts to be implemented efficiently while maintaining a clean and uniform aesthetic.

落地式灯具，采用圆形铝制灯体，铝型材卷制成型，无缝焊接，表面经粉末喷涂处理，可选白色、灰色、深灰色、黑色、米色或深棕色；配备直径 Ø600 mm 的圆形发光面板，整体高度为 1963 mm。
提供直接向下照明（Down）和直接/间接照明（Up & Down）两种配置。采用微棱镜扩散罩，适用于无眩光办公照明，UGR 值低于或等于 19。其设计可灵活实现不同的照明方案，同时保持简洁统一的美学风格。

XFL2017

XPANEL SLIM

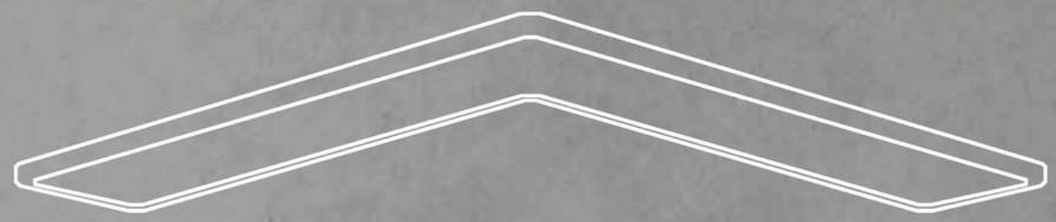


XPANEL SLIM
SERIES

SUSPENDED | SURFACE

CROMATIX®
Lighting Intelligence



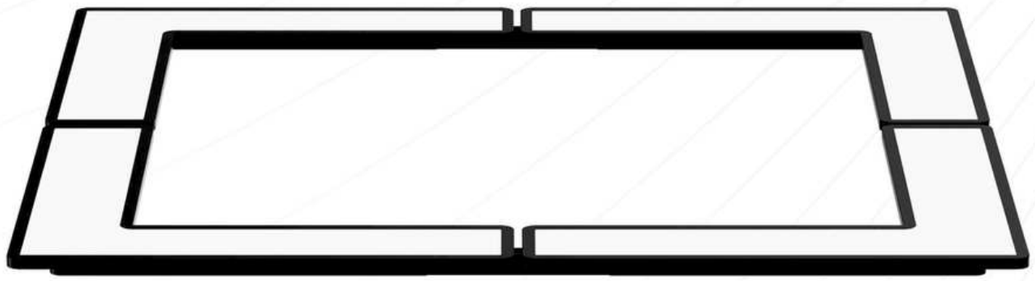

NEW SERIES

XPANEL SLIM

IT ALL BEGINS WITH A SIMPLE IDEA:
MAKE THE TRADITIONAL PANEL MORE FLEXIBLE!





CONTINUOUS

Luminaires can be connected seamlessly and without limits, solving the traditional problem of LED panels that cannot be linked. Perfect for both residential and commercial spaces.



ADAPTABLE SYSTEM

The lighting configuration can be modified at any time, ensuring flexibility for evolving project needs.

QUICK CONNECTION

Special straight connectors provide maximum design freedom.

Luminaires can be reinstalled, combined, or extended with a single click — no tools required.

LP2017

PRISMATIC DIFFUSER

棱晶防眩罩



Indoor 室内使用 | General lighting 基础照明 | High efficiency 高光效 | Low energy consumption 低能耗 | Anti glare 防眩光 | Accurate light distribution 标准光 | No flickering 无频闪 | Long life 长寿命 | IP 20 Protection level 防护等级

PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;
Available in diff erent versions and LED performance classes.Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free offi ce lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefi ts; the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LP2017P-1170	L1170*H17mm	30W	7200Lm	3300Lm
LP2017P-1450	L1450*H17mm	45W	10800Lm	4950Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LP2017PU-1170	L1170*H17mm	42W	10080Lm	4620Lm
LP2017PU-1450	L1450*H17mm	52W	12480Lm	5720Lm

PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None

LP2017

CROMATIX®
Lighting Intelligence

CURVED PANEL

- Aluminium curved profile housing with ultra-slim design.
- Can be configured as a whole circle or continuous segments.
- Tool-less connection system allows quick linking of multiple panels.
- Fast installation with a tool-free mounting system.
- Available in direct or direct/indirect light distribution using LGP technology.

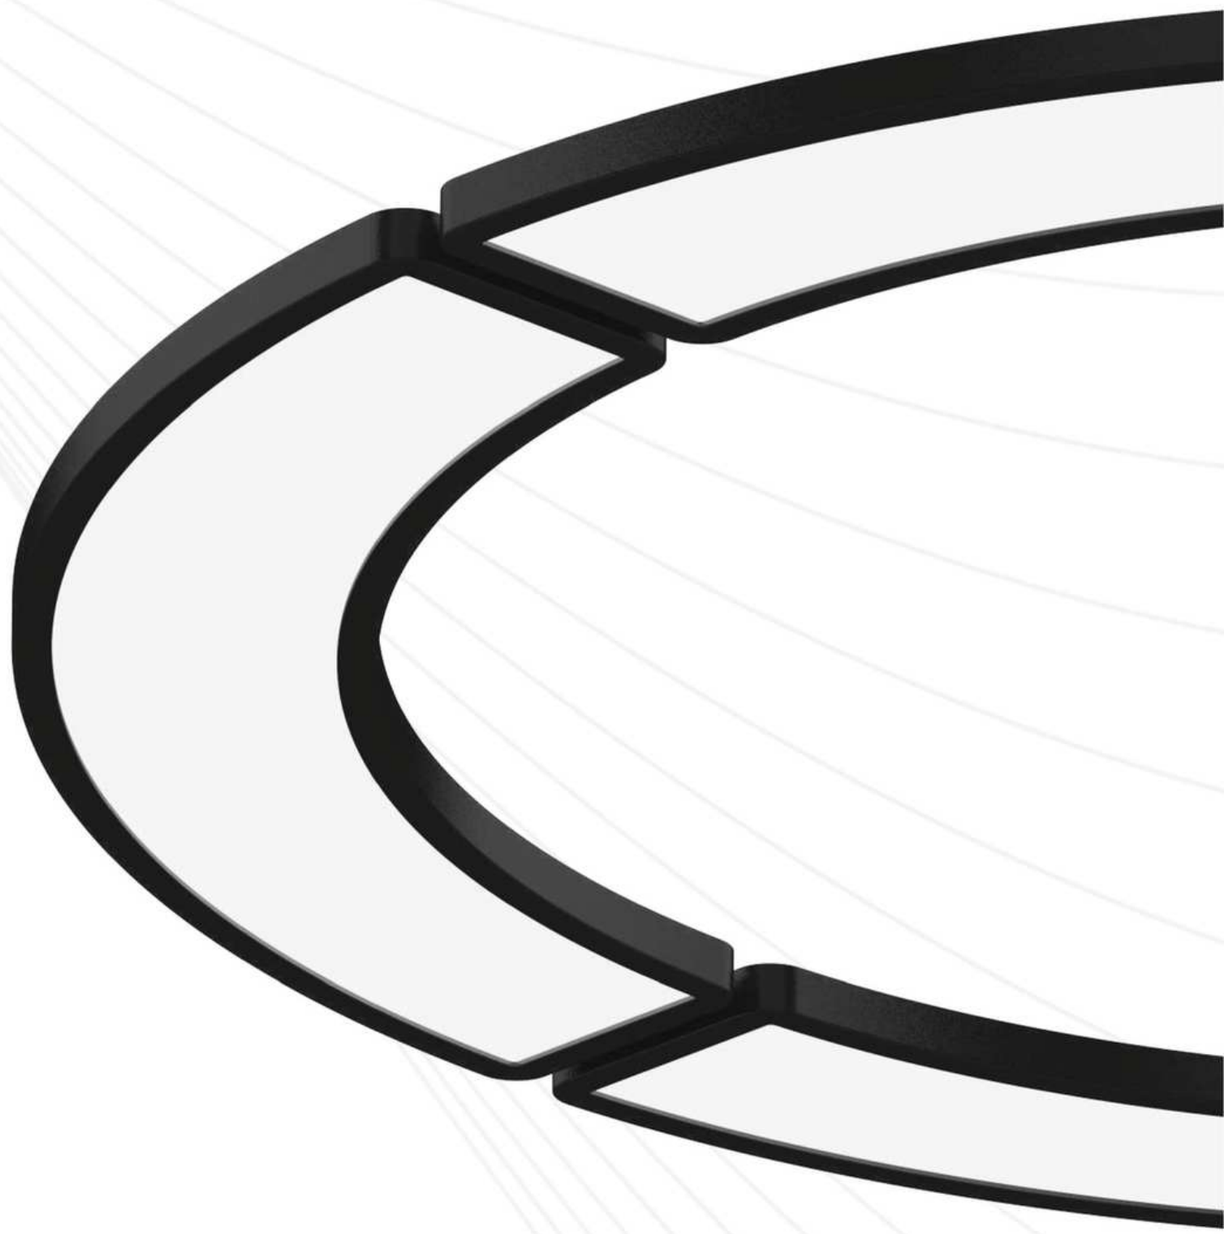

RP2017

PRISMATIC DIFFUSER

棱晶防眩罩



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
RP2017P-1500 1/4	D1538*H17mm 1/4	30W	7200Lm	3300Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
RP2017PU-1500 1/4	D1538*H17mm 1/4	42W	10080Lm	4620Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None

Indoor 室内使用 | General lighting 基础照明 | High efficiency 高光效 | Low energy consumption 低能耗 | Anti glare 防眩光 | Accurate light distribution 标准光 | No flickering 无频闪 | Long life 长寿命 | IP 20 Protection level 防护等级


PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;
Available in diff erent versions and LED performance classes.Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free offi ce lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefi ts: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

RP2017

SQUARE
PANEL

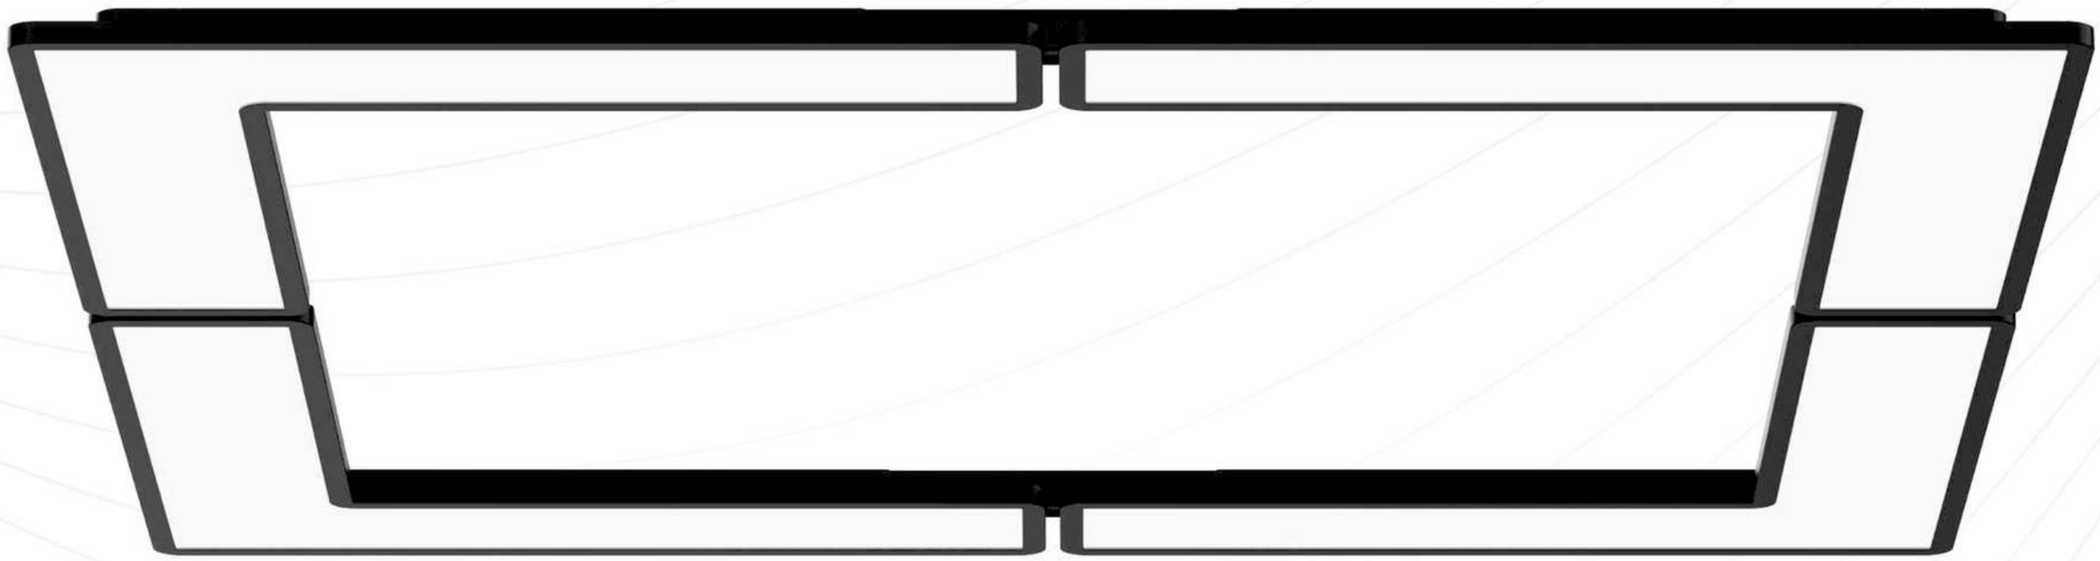

CROMATIX®
Lighting Intelligence

- Formed by combining four L-shapes with equal side lengths.
- Can be configured as a square or extended into a rectangle by adding straight lines.
- Available in direct or direct/indirect light distribution versions.

SP2017

PRISMATIC DIFFUSER

棱晶防眩罩




TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
SP2017P-L	763*763*H17mm	38W	9120Lm	4180Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
SP2017PU-L	763*763*H17mm	52W	12480Lm	5720Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K □ 4000K □ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black □ Silver □ Custom Color
Dimming	□ On/off □ 1-10V □ DALI □ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in diff erent versions and LED performance classes.Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free offi ce lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefi ts: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


SP2017


DESIGN
POSSIBILITIES

Free your creativity

The entire XPANEL Slim series can be connected seamlessly.

Designers and architects gain the freedom to create **limitless shapes.**

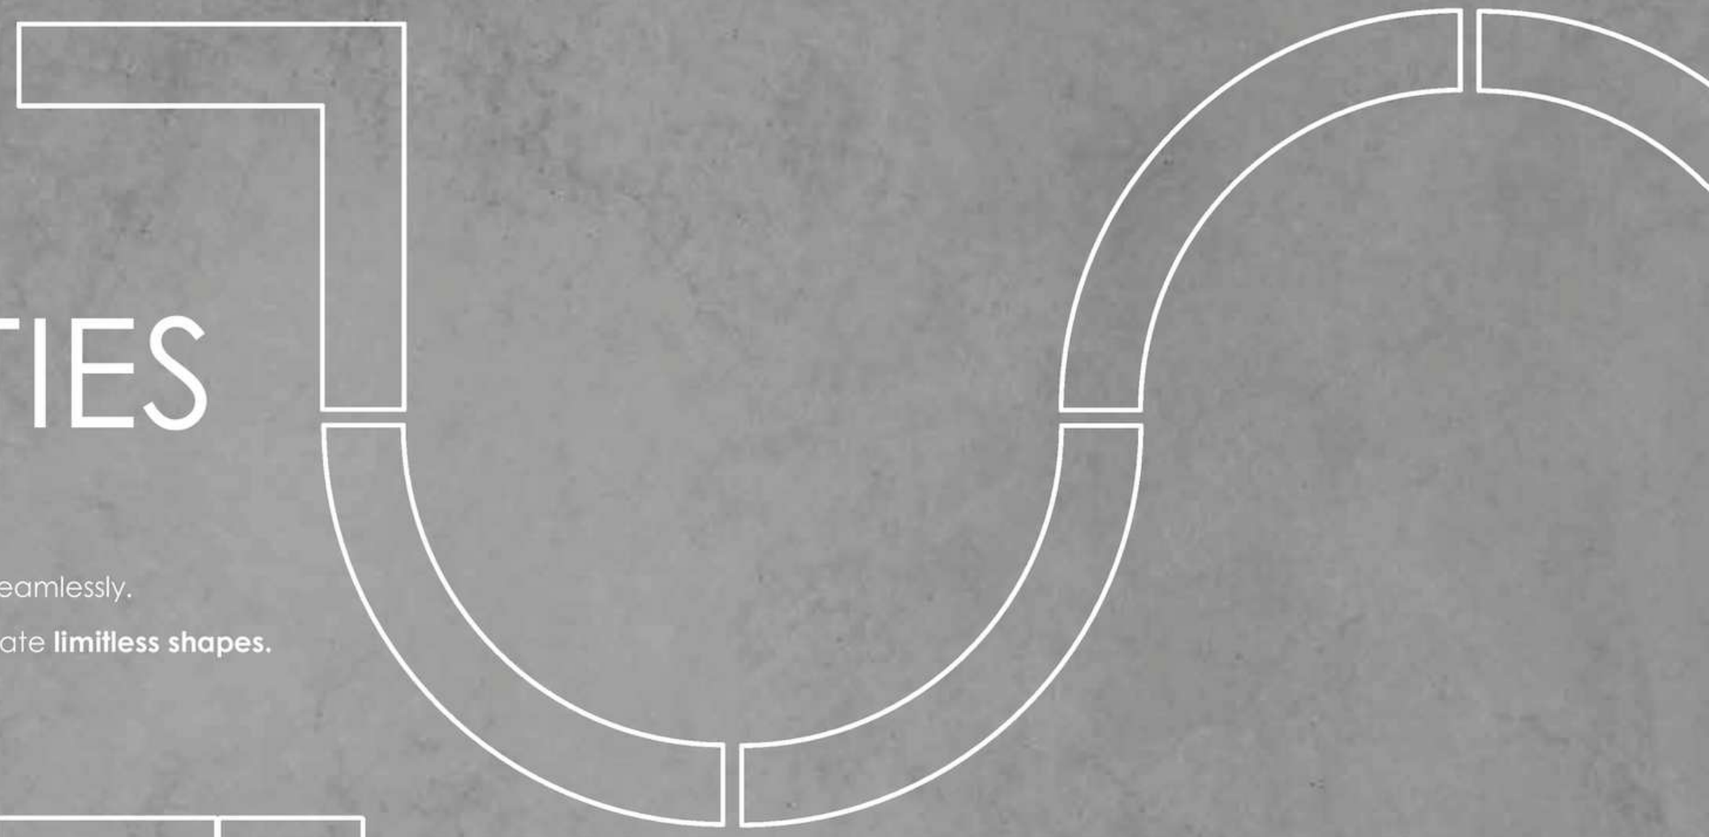


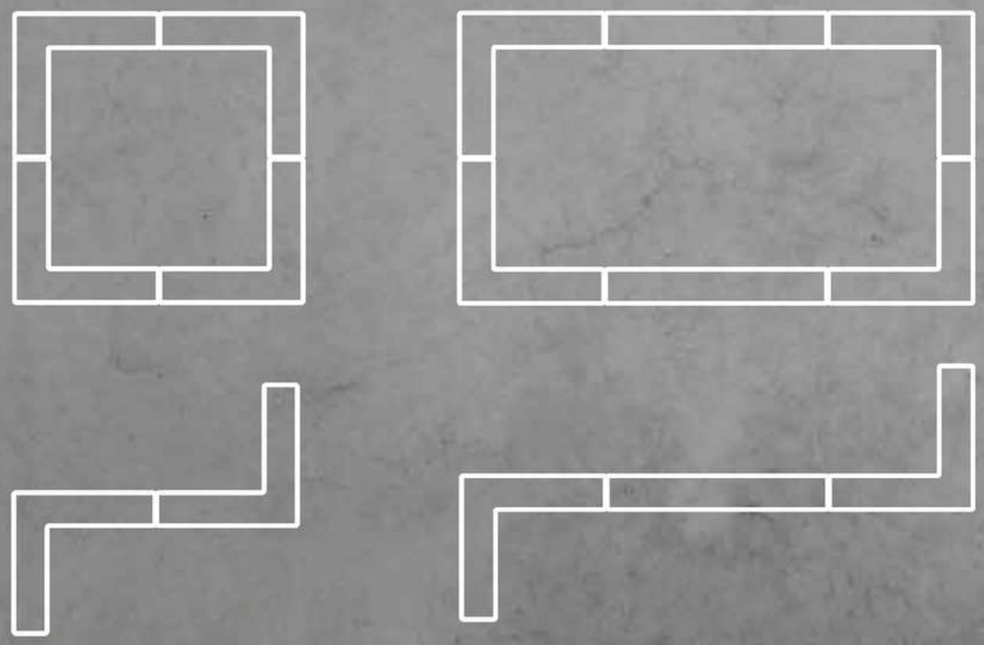

From **squares and rectangles** to **S-shapes**
or **complex geometries**.

The system adapts easily to
any concept or space.

Lighting becomes a **tool for creativity,**
transforming spaces with endless possibilities.

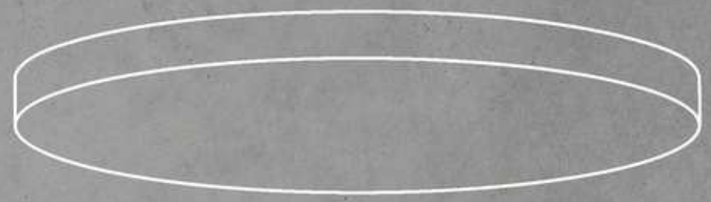



XPANEL FLAT
SERIES

SUSPENDED | SURFACE

XPANEL FLAT SERIES

LED PANEL

SURFACE | SUSPENDED

The beauty of simplicity comes to life with XPANEL FLAT. Ultra-thin circular and square panels, suspended or surface-mounted, bring harmony and elegance to any environment. Thanks to their super-thin profile, they blend discreetly into architecture, almost invisible yet always delivering refined and functional light.

Combine different sizes to create unique compositions full of personality, or let a single panel become the subtle centerpiece that transforms the atmosphere.

Versatile and timeless, XPANEL FLAT adapts to both grand open spaces and intimate rooms, in residential or institutional settings. And when paired with round acoustic panels, light and comfort merge into a perfect balance.







BNP Paribas Cardif Offices | Architecture and Lighting Design: Grupo E

DIRECT

As a traditional panel, direct lighting is the basic version.
It requires several strategically placed fixtures to achieve
an even distribution of light across the space.



DIRECT | INDIRECT

This option combines sidelighting with an additional indirect
component, creating a more relaxing and ambient atmosphere.
Ideal for making spaces feel comfortable, balanced, and inviting.

XP2017

CABLE SUSPENDED/PRISMATIC DIFFUSER

吊线安装/棱晶防眩罩



Indoor 室内使用 | General lighting 基础照明 | High efficiency 高光效 | Low energy consumption 低能耗 | Anti glare 防眩光 | Accurate light distribution 标准光 | No flickering 无频闪 | Long life 长寿命 | IP 20 Protection level 防护等级

PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP2017-450PM-S	D450*H17mm	30W	7200Lm	3300Lm
XP2017-600PM-S	D600*H17mm	40W	9600Lm	4400Lm
XP2017-900PM-S	D900*H17mm	60W	14400Lm	6600Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP2017-450PMU-S	D450*H17mm	45W	10600Lm	4950Lm
XP2017-600PMU-S	D600*H17mm	60W	14400Lm	6600Lm
XP2017-900PMU-S	D900*H17mm	90W	21600Lm	9900Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None

XP2017

XP2017

SURFACED / PRISMATIC DIFFUSER

吸顶/棱晶防眩罩



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP2017-450PM-C	D450*H17mm	30W	7200Lm	3300Lm
XP2017-600PM-C	D600*H17mm	40W	9600Lm	4400Lm
XP2017-900PM-C	D900*H17mm	60W	14400Lm	6600Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP2017-450PMU-C	D450*H17mm	45W	10600Lm	4950Lm
XP2017-600PMU-C	D600*H17mm	60W	14400Lm	6600Lm
XP2017-900PMU-C	D900*H17mm	90W	21600Lm	9900Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None

Indoor 室内使用 · General lighting 基础照明 · High efficiency 高光效 · Low energy consumption 低能耗 · Anti glare 防眩光 · Accurate light distribution 标准光 · No flickering 无频闪 · Long life 长寿命 · IP 20 Protection level 防护等级

PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamless surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment.
Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of ≤19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小，减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。



XP2017

XP2017

ROD SUSPENDED / PRISMATIC DIFFUSER

吊杆安装/棱晶防眩罩



Indoor 室内使用 | General lighting 基础照明 | High efficiency 高光效 | Low energy consumption 低能耗 | Anti glare 防眩光 | Accurate light distribution 标准光 | No flickering 无频闪 | Long life 长寿命 | Protection level 防护等级

PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;
Available in different versions and LED performance classes.Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP2017-450PM-R	D450*H17mm	30W	7200Lm	3300Lm
XP2017-600PM-R	D600*H17mm	40W	9600Lm	4400Lm
XP2017-900PM-R	D900*H17mm	60W	14400Lm	6600Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP2017-450PMU-R	D450*H17mm	45W	10600Lm	4950Lm
XP2017-600PMU-R	D600*H17mm	60W	14400Lm	6600Lm
XP2017-900PMU-R	D900*H17mm	90W	21600Lm	9900Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black □ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None

XP2017



FLUSH CEILING

Flush-mounted ceiling luminaires provide a clean, modern appearance, sitting just 1 mm from the ceiling.

They offer uniform illumination while maintaining a minimalist, seamless integration with the architecture — ideal for spaces that demand both functionality and design elegance.

GAP: 1MM



Coordinador Eléctrico Nacional | Lighting Design: Diseño de Luz. | Architecture: Jorge Iglesis. | Interior Design:OArquitectos.

XP1826

PRISMATIC DIFFUSER

棱晶防眩罩



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP1826-450	D450*H26mm	30W	5100Lm	3000Lm
XP1826-600	D600*H26mm	40W	6800Lm	4000Lm
XP1826-900	D900*H26mm	60W	10200Lm	6000Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None

Indoor 室内使用 | General lighting 基础照明 | High efficiency 高光效 | Low energy consumption 低能耗 | Anti glare 防眩光 | Accurate light distribution 标准光 | No flickering 无频闪 | Long life 长寿命 | IP 20 Protection level 防护等级

PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;
Available in diff erent versions and LED performance classes.Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free offi ce lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefi ts: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


XP1826



Novo Nordisk Offices | Architecture: FMZ Arquitectura | Lighting Design: Docevolts Francisca Nicoletti.

ULTRA THIN
极致超薄


GLARE FREE
UGR < 19

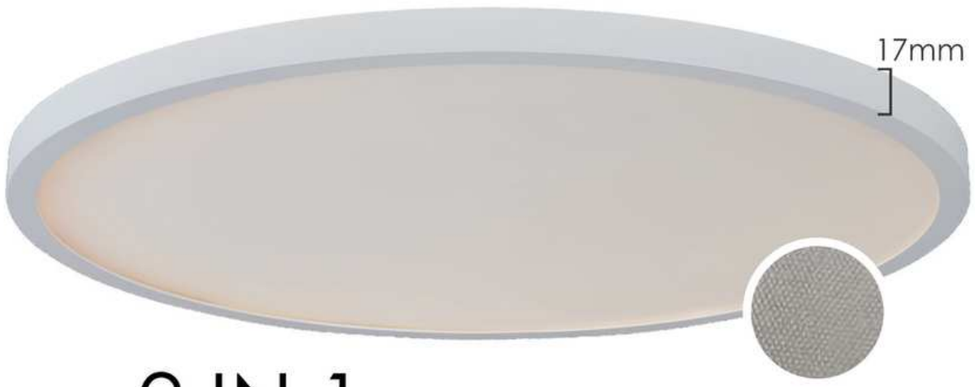

2 IN 1
SURFACED & SUSPENDED
吸顶与吊装二合一

CROMATIX®
Lighting Intelligence

DIMENSION OPTIONS

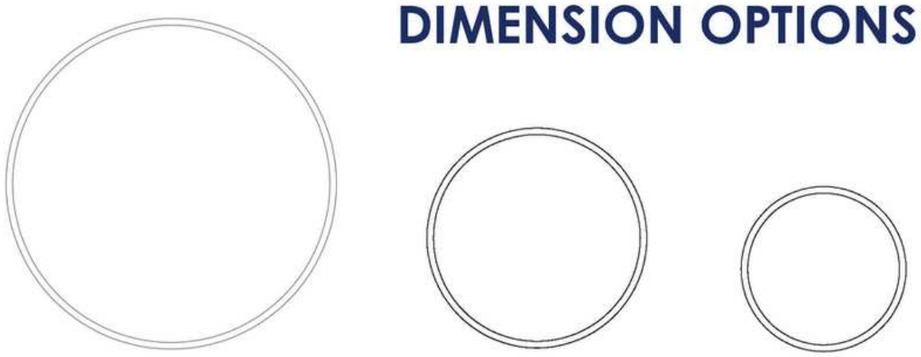

MOUNTING OPTIONS



ULTRA THIN


BNP Paribas Cardif | Architecture and Lighting Design: Grupo E.

Novo Nordisk Offices | Architecture: FMZ Arquitectura | Lighting Design: Docevolts Francisca Nicoletti.

SP27

Square Frameless

无边框

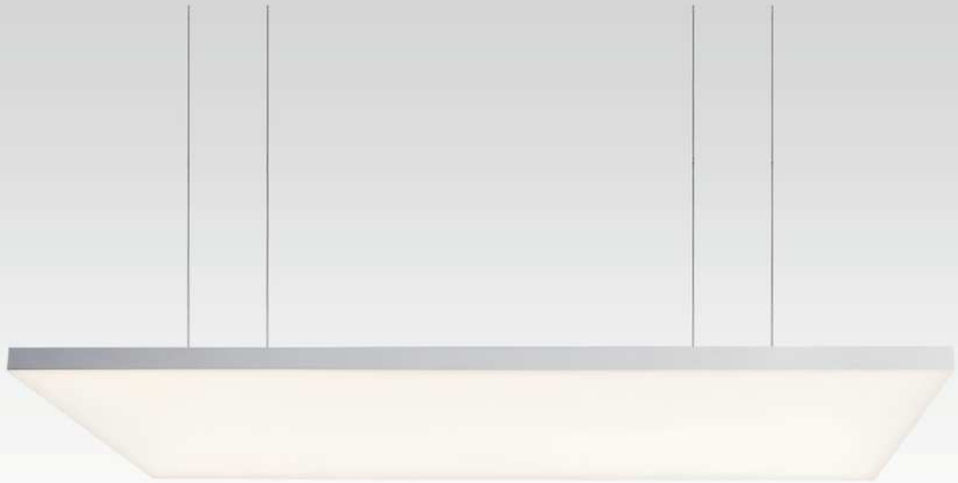


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
SP27-3030	300*300*H27mm	24W	4590Lm	2400Lm
SP27-4545	450*450*H27mm	36W	6840Lm	3600Lm
SP27-6060	600*600*H27mm	48W	9180Lm	4800Lm
SP27-12018	1200*180*H27mm	24W	4590Lm	2400Lm
SP27-15018	1500*180*H27mm	48W	9180Lm	4800Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None

DIMENSION OPTIONS

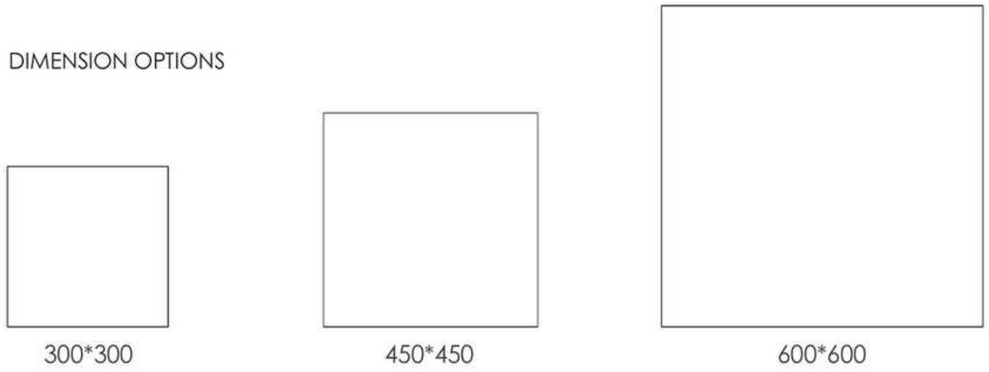



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;
Available in diff erent versions and LED performance classes.Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free offi ce lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefi ts: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining a clean and uniform design style.


灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

SP27

GLOBANT Offices | Architecture and Lighting Design: Ael Spaces.

Barrios Offices | Lighting Design: Diseño de Luz.

XPANEL

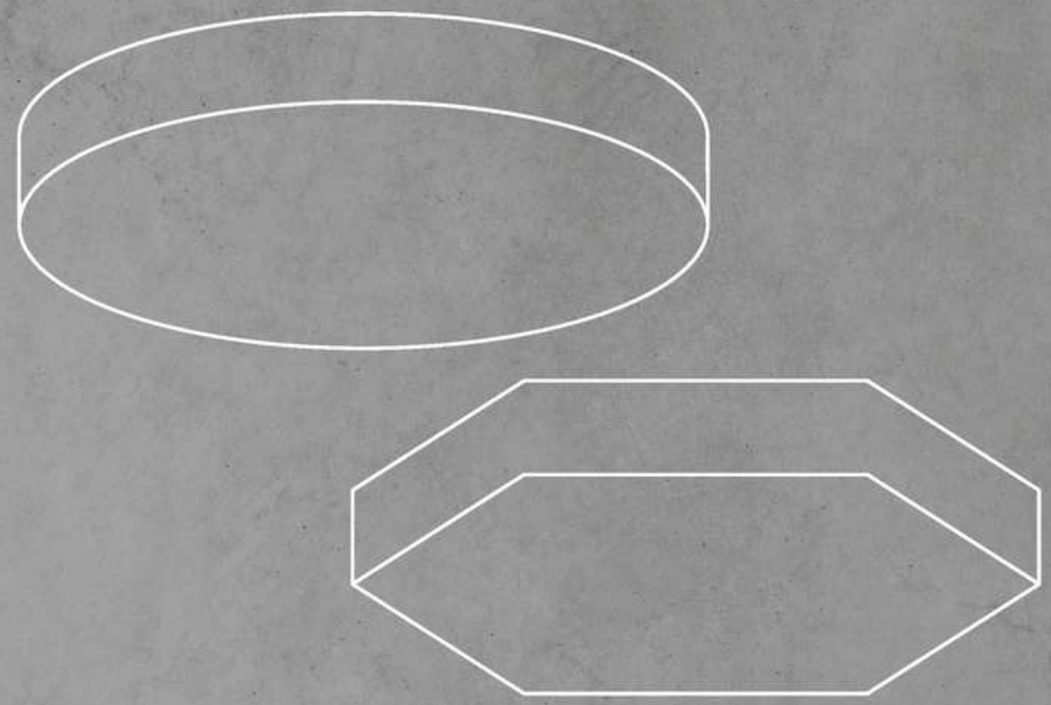

XPANEL
SERIES

SUSPENDED | SURFACE

XPANEL SERIES

LED PANEL

SURFACE | SUSPENDED

The XPANEL series offers circular and hexagonal LED panels in different sizes, designed with a thicker profile that delivers a higher luminous output.

Suitable for suspended or surface mounting, they are the perfect choice for projects with technical requirements and for large or high-ceiling spaces where powerful and efficient lighting is essential. Beyond functionality, XPANEL luminaires also become architectural features, adding character and presence to every environment — a fusion of light and design that elevates spaces with elegance and strength.







MK Outlet Showroom. Lighting Design: Luz + Diseño - Gaspar Arenas.

TRIMLESS

This frameless panel differs from traditional LED panels with wide frame edges. When illuminated, the frame becomes invisible, achieving a seamless integration with the ceiling.

Equipped with a high-efficiency LGP (Light Guide Plate) and a PMMA (Polymethyl Methacrylate) diffuser, it delivers a luminous output that is even and uniform, bringing comfort and elegance to every project.



XP27

Round Frameless

无边框



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP27-300	D300*H27mm	24W	4590Lm	2400Lm
XP27-450	D450*H27mm	36W	6840Lm	3600Lm
XP27-600	D600*H27mm	48W	9180Lm	4800Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None




PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;
Available in diff erent versions and LED performance classes.Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free offi ce lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefi ts: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条规明美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

DIMENSION OPTIONS

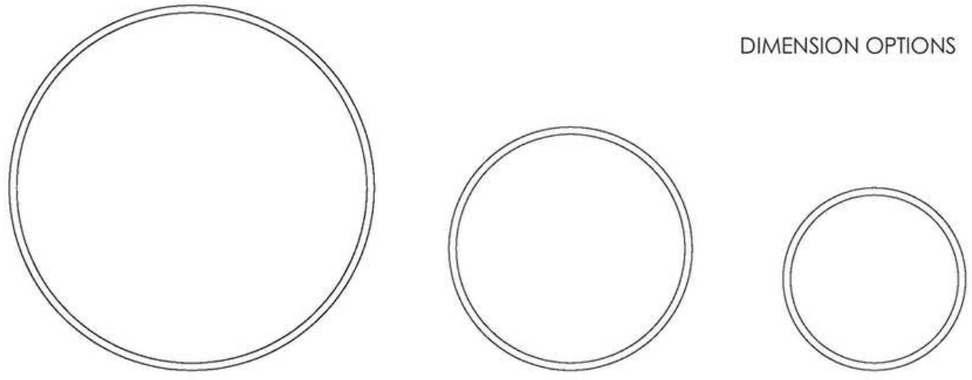

XP27

CROMATIX®
Lighting Intelligence

OPAL DIFFUSER

120LM/W
乳白亚克力罩
120流明/瓦



MICROPRISMATIC
COVER
棱晶防眩罩

GLARE FREE

UGR < 19
无眩光 眩光值小于19

FLEXIBILITY
IN APPLICATION

- Available in different versions and LED performance classes.
- Choose the translucent cover for uniform illumination.
- Select the microprismatic variant for glare-free office lighting with an optimum UGR <19.
- Particularly in large-scale projects, this wide range of options provides significant advantages: different room concepts can be implemented cost-effectively and energy-efficiently, while maintaining a clean and consistent design style.

MOUNTING OPTIONS 安装方式



SURFACED

- Round luminaire with a seamless, powder-coated aluminum housing.
- Quick, tool-free mounting system.
- Equipped with energy-efficient LEDs and excellent color rendering.
- Provides uniform, homogeneous illumination.
- Available with direct or direct/indirect light distribution, using satinized or microprismatic PMMA covers.



CEN Offices | Lighting Design: Diseño de Luz. | Architecture: Jorge Iglesis. | Interior Design:OArquitectos.

XP62P

OPAL DIFFUSER

亚克力罩



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP62P-450	D450*H62mm	30W	5400Lm	3300Lm
XP62P-600	D600*H62mm	40W	6800Lm	4800Lm
XP62P-900	D900*H62mm	60W	10200Lm	7200Lm
XP62P-1200	D1200*H62mm	80W	13600Lm	9600Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP62PU-450	D600*H62mm	45W	7690Lm	5000Lm
XP62PU-600	D600*H62mm	60W	10200Lm	7200Lm
XP62PU-900	D900*H62mm	90W	15300Lm	10800Lm
XP62PU-1200	D1200*H62mm	120W	20400Lm	14400Lm



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;
Available in diff erent versions and LED performance classes.Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free offi ce lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefi ts: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金、表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。



XP62P

XP62PM

PRISMATIC DIFFUSER
UGR<19

棱晶防眩罩
眩光值<19



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP62PM-450	D450*H62mm	30W	5400Lm	3300Lm
XP62PM-600	D600*H62mm	40W	6800Lm	4800Lm
XP62PM-900	D900*H62mm	60W	10200Lm	7200Lm
XP62PM-1200	D1200*H62mm	80W	13600Lm	9600Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP62PMU-450	D600*H62mm	45W	7690Lm	5000Lm
XP62PMU-600	D600*H62mm	60W	10200Lm	7200Lm
XP62PMU-900	D900*H62mm	90W	15300Lm	10800Lm
XP62PMU-1200	D1200*H62mm	120W	20400Lm	14400Lm



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;
Available in diff erent versions and LED performance classes.Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free offi ce lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefi ts: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小，减少后期维护费用。
灯具线条棱角美观，外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

XP62PM



IGS Group Offices | Architecture: Eton y Leniz Arquitectos. | Lighting Design: LEVO Studio.

XP105P

OPAL DIFFUSER

亚克力罩



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP105P-450	D450*H62mm	30W	5400Lm	3300Lm
XP105P-600	D600*H62mm	40W	6800Lm	4800Lm
XP105P-900	D900*H62mm	60W	10200Lm	7200Lm
XP105P-1200	D1200*H62mm	80W	13600Lm	9600Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP105PU-450	D600*H62mm	45W	7690Lm	5000Lm
XP105PU-600	D600*H62mm	60W	10200Lm	7200Lm
XP105PU-900	D900*H62mm	90W	15300Lm	10800Lm
XP105PU-1200	D1200*H62mm	120W	20400Lm	14400Lm



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;
Available in diff erent versions and LED performance classes.Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free offi ce lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefi ts: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining a clean and uniform design style.

灯具电源选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光，DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小，减少后期维护费用。
灯具线条棱角美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型拉光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。



Rosen Showroom | Lighting Design: Luxia Lighting.

XP105P

XP105PM

PRISMATIC DIFFUSER
UGR<19


棱晶防眩罩
眩光值<19



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP105PM-450	D450*H62mm	30W	5400Lm	3300Lm
XP105PM-600	D600*H62mm	40W	6800Lm	4800Lm
XP105PM-900	D900*H62mm	60W	10200Lm	7200Lm
XP105PM-1200	D1200*H62mm	80W	13600Lm	9600Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP105PMU-450	D600*H62mm	45W	7690Lm	5000Lm
XP105PMU-600	D600*H62mm	60W	10200Lm	7200Lm
XP105PMU-900	D900*H62mm	90W	15300Lm	10800Lm
XP105PMU-1200	D1200*H62mm	120W	20400Lm	14400Lm

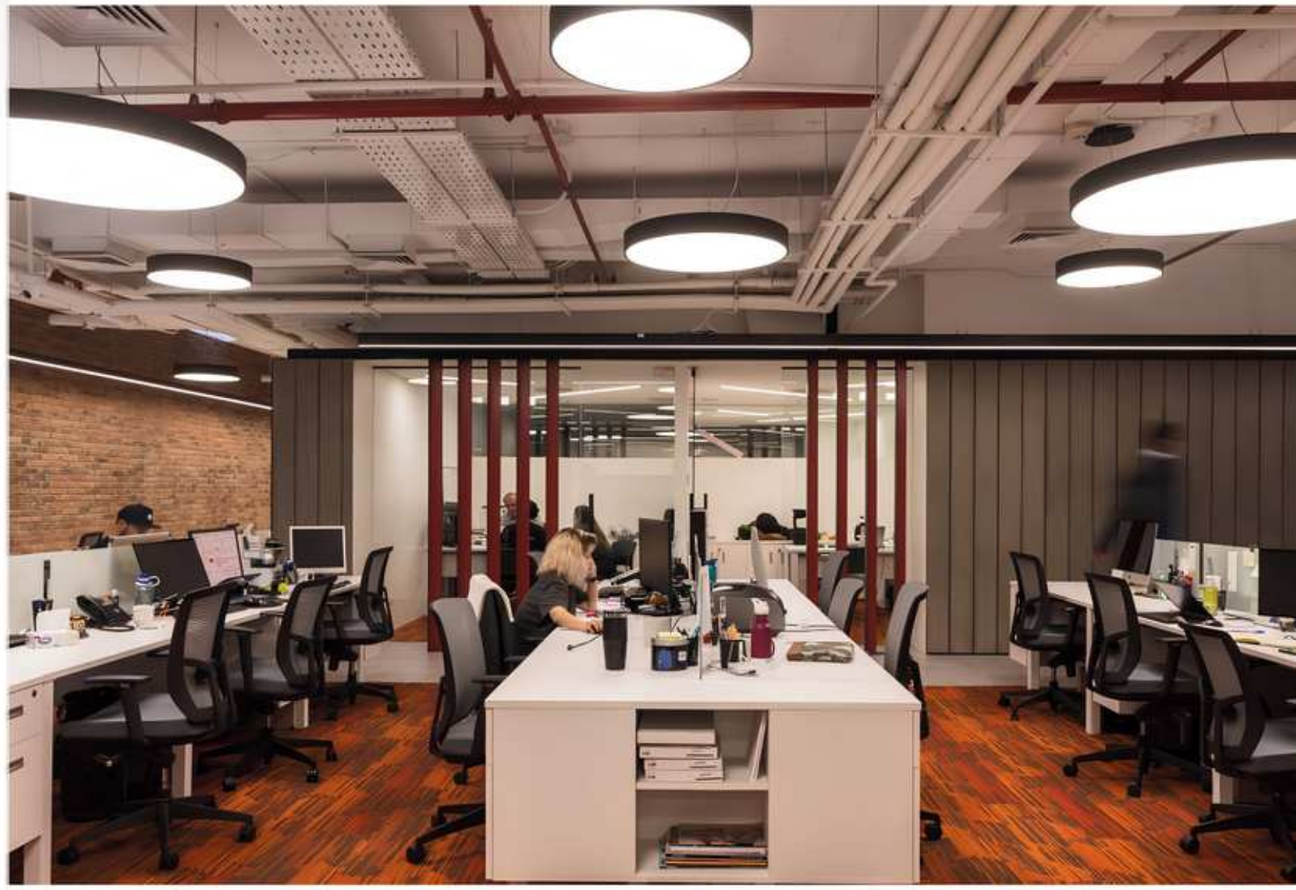

IGS Group Offices | Architecture: Elton y Leniz Arquitectos. | Lighting Design: LEVO Studio.



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;
Available in diff erent versions and LED performance classes.Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free offi ce lighting with an optimum UGR value of <19; Especially in large projects, the wide range of options has many benefi ts; the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

XP105PM

XP65P

OPAL DIFFUSER

亚克力罩



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP65P-450	D450*H65mm	30W	5400Lm	3300Lm
XP65P-600	D600*H65mm	40W	6800Lm	4800Lm
XP65P-900	D900*H65mm	60W	10200Lm	7200Lm
XP65P-1200	D1200*H65mm	80W	13600Lm	9600Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP65PU-450	D600*H65mm	45W	7690Lm	5000Lm
XP65PU-600	D600*H65mm	60W	10200Lm	7200Lm
XP65PU-900	D900*H65mm	90W	15300Lm	10800Lm
XP65PU-1200	D1200*H65mm	120W	20400Lm	14400Lm



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;
Available in diff erent versions and LED performance classes.Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free offi ce lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefi ts: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。



XP65P

XP65PM

PRISMATIC DIFFUSER
UGR<19

棱晶防眩罩
眩光值<19



Indoor 室内使用 | General lighting 基础照明 | High efficiency 高光效 | Low energy consumption 低能耗 | Anti glare 防眩光 | Accurate light distribution 标准光 | No flickering 无频闪 | Long life 长寿命 | IP 20 Protection level 防护等级

PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;
Available in diff erent versions and LED performance classes.Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free offi ce lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefi ts: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP65PM-450	D450*H65mm	30W	5400Lm	3300Lm
XP65PM-600	D600*H65mm	40W	6800Lm	4800Lm
XP65PM-900	D900*H65mm	60W	10200Lm	7200Lm
XP65PM-1200	D1200*H65mm	80W	13600Lm	9600Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP65PMU-450	D600*H65mm	45W	7690Lm	5000Lm
XP65PMU-600	D600*H65mm	60W	10200Lm	7200Lm
XP65PMU-900	D900*H65mm	90W	15300Lm	10800Lm
XP65PMU-1200	D1200*H65mm	120W	20400Lm	14400Lm



XP65PM

Showroom CROMATIX Zhongshan China.

HEXAGON
六边形



OPAL DIFFUSER
亚克力罩



PRISMATIC DIFFUSER
防眩光棱晶罩



ACOUSTIC DIFFUSER
吸音板

XH105P

OPAL DIFFUSER

亚克力罩





PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;
Available in diff erent versions and LED performance classes.Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free offi ce lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefi ts: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源。另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XH105PM-600	W600*H105mm	**40W**	6800Lm	4800Lm
XH105PM-900	W900*H105mm	**60W**	10200Lm	7200Lm
XH105PM-1200	W1200*H105mm	**80W**	13600Lm	9600Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XH105PMU-600	W600*H105mm	**60W**	10200Lm	7200Lm
XH105PMU-900	W900*H105mm	**90W**	15300Lm	10800Lm
XH105PMU-1200	W1200*H105mm	**120W**	20400Lm	14400Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

XH105P

XH105PM

PRISMATIC DIFFUSER

防眩棱晶罩



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;
Available in diff erent versions and LED performance classes.Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free offi ce lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefi ts: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观，外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XH105PM-600	W600*H105mm	40W	6800Lm	4800Lm
XH105PM-900	W900*H105mm	60W	10200Lm	7200Lm
XH105PM-1200	W1200*H105mm	80W	13600Lm	9600Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XH105PMU-600	W600*H105mm	60W	10200Lm	7200Lm
XH105PMU-900	W900*H105mm	90W	15300Lm	10800Lm
XH105PMU-1200	W1200*H105mm	120W	20400Lm	14400Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

XH105PM



Casaideas | Lighting Design: Luxia Lighting.



Forus Offices | Architecture: Armas Elton Arquitectos. | Lighting Design: Diseño de Luz.



XCURVE XRING
SERIES

SUSPENDED | SURFACE | RECESSED

XCURVE & XRING SERIES


LED RING & CURVE

SURFACE | SUSPENDED | RECESSED

Inspired by nature and its organic forms, XCURVE & XRING offer designers a versatile tool to create freely, combining straight lines, curves, and circular shapes that integrate seamlessly with architecture and interior design.

With refined finishes and a perfect balance between technical performance and decorative appeal, this series opens the door to endless design possibilities. Available with direct or indirect lighting, and ranging from compact sizes to impressive diameters of up to 5 meters, these luminaires can be used individually or combined to achieve unique compositions.

The result is lighting that brings sophistication, functionality, and character to any space, transforming projects into experiences where architecture and light converge in harmony.

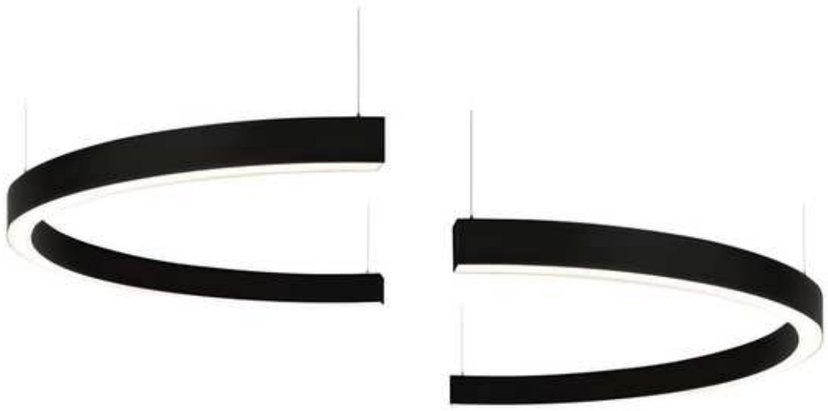



Cencosud Offices. Architecture and construction: CASBRO

XR90120

CIRCULAR RING
圆环



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR90120-600	600*90*120mm	30W	5100lm	3600lm
XR90120-900	900*90*120mm	40W	6800lm	4800lm
XR90120-1200	1200*90*120mm	60W	10200lm	7200lm
XR90120-1500	1500*90*120mm	95W	16150lm	11400lm
XR90120-2000	2000*90*120mm	125W	21250lm	15000lm
XR90120-2400	2400*90*120mm	150W	25500lm	18000lm
XR90120-3000	3000*90*120mm	190W	32300lm	22800lm
XR90120-4000	4000*90*120mm	252W	42700lm	30240lm
XR90120-5000	5000*90*120mm	315W	53500lm	37800lm
XR90120-10000	10000*90*120mm	620W	105400lm	74400lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor




PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light ,distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电源选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防眩效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

DIMENSION OPTIONS

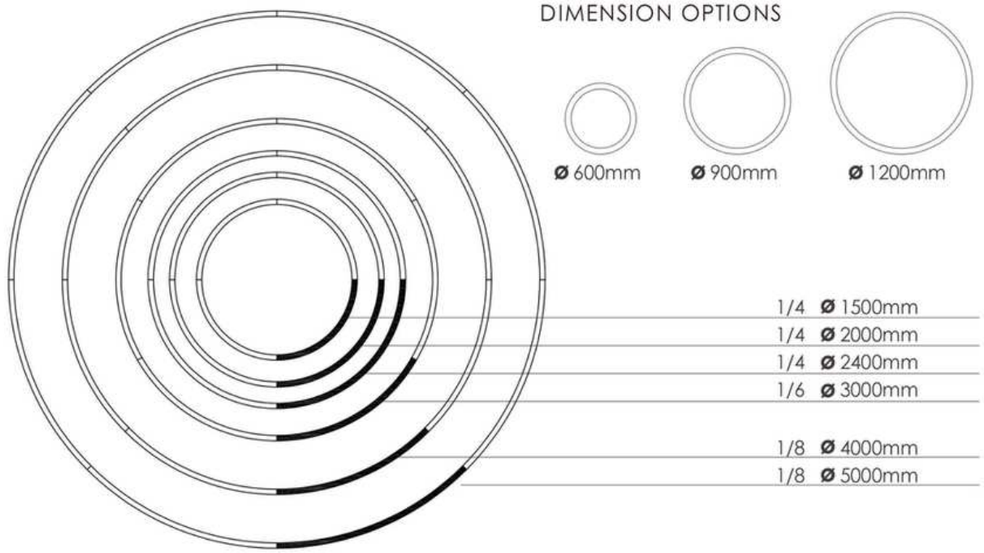

XR90120

XR2048

INTERNAL LIGHT 内置光源

CIRCULAR RING

圆环



Indoor 室内使用 | General lighting 基础照明 | High efficiency 高光效 | Low energy consumption 低能耗 | Anti-glare 防眩光 | Accurate light distribution 精准光 | No flickering 无频闪 | Long life 长寿命 | IP 20 Protection level 防护等级

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip.
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light ,distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR2048-600	600*20*48mm	40W	5100lm	2000lm
XR2048-900	900*20*48mm	60W	10200lm	3000lm
XR2048-1000	1000*20*48mm	70W	11900lm	3500lm
XR2048-1200	1200*20*48mm	80W	13600lm	4000lm
XR2048-1500	1500*20*48mm	100W	17000lm	5000lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DIMENSION OPTIONS

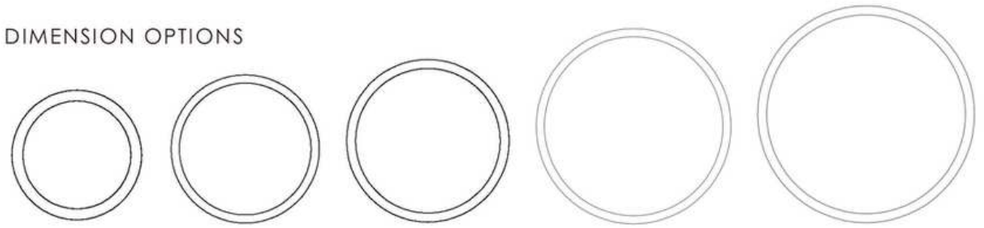

Ø 600mm　Ø 900mm　Ø 1000mm　Ø 1200mm　Ø 1500mm

XR2048

DESIGN
POSSIBILITIES

Free your creativity

Organic design made possible
with curves and straight lines.

WHITE FRAME + BLACK TRIM



WHITE FRAME + ORANGE TRIM



GREY FRAME + ORANGE TRIM



BLACK FRAME + BLACK TRIM




CROMATIX®
Lighting Intelligence



XR5580

CIRCULAR RING

圆环

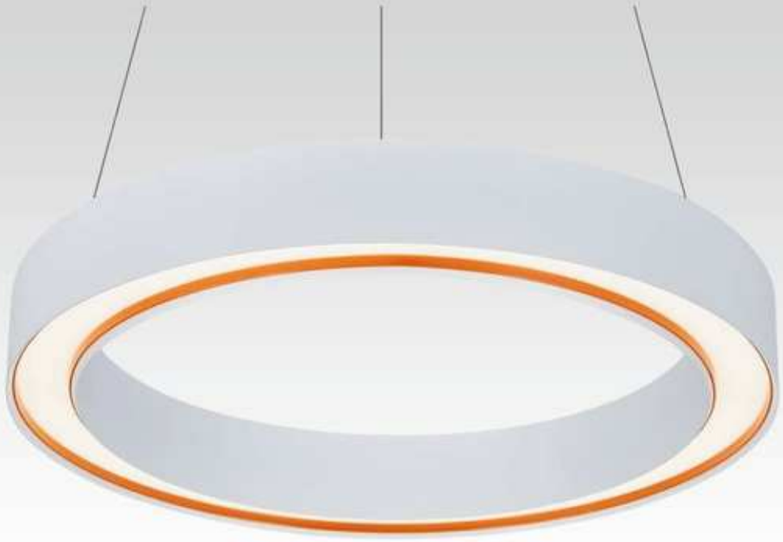

PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light ,distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光，DALI调光，调色温驱动电源。
寿命长达5万小时，光衰小，减少后期维护费用。
灯具线条修饰美观，外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防眩效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR5580-605	605*55*80mm(2FT)	30W	5100Lm	3000Lm
XR5580-905	905*55*80mm(3FT)	40W	6800Lm	4000Lm
XR5580-1205	1205*55*80mm(4FT)	60W	10200Lm	6000Lm
XR5580-1505	1505*55*80mm(5FT)	95W	16150Lm	9500Lm
XR5580-2005	2005*55*80mm(7FT)	125W	21250Lm	12500Lm
XR5580-2405	2405*55*80mm(8FT)	150W	25500Lm	15000Lm
XR5580-3005	3005*55*80mm(10FT)	190W	32300Lm	19000Lm
XR5580-4005	4005*55*80mm(10FT)	252W	42700Lm	25200Lm
XR5580-5005	5005*55*80mm(16FT)	315W	53550Lm	31500Lm
XR5580-10005	10000*55*80mm(32FT)	620W	10540Lm	62000Lm

Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR5580-605	605*55*80mm(2FT)	30W	5100Lm	3000Lm
XR5580-905	905*55*80mm(3FT)	40W	6800Lm	4000Lm
XR5580-1205	1205*55*80mm(4FT)	60W	10200Lm	6000Lm
XR5580-1505	1505*55*80mm(5FT)	95W	16150Lm	9500Lm
XR5580-2005	2005*55*80mm(7FT)	125W	21250Lm	12500Lm
XR5580-2405	2405*55*80mm(8FT)	150W	25500Lm	15000Lm
XR5580-3005	3005*55*80mm(10FT)	190W	32300Lm	19000Lm
XR5580-4005	4005*55*80mm(10FT)	252W	42700Lm	25200Lm
XR5580-5005	5005*55*80mm(16FT)	315W	53550Lm	31500Lm
XR5580-10005	10000*55*80mm(32FT)	620W	10540Lm	62000Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DIMENSION OPTIONS

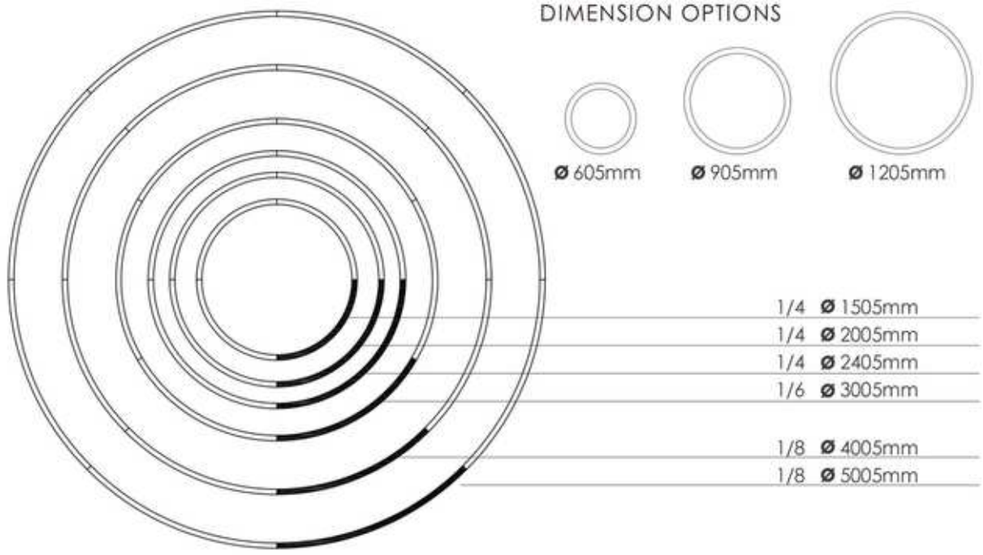

XR5580



Cencosud Offices. Architecture and construction: CASBRO

XR5070

CIRCULAR RING

圆环



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR5070-600	600*50*70mm(2FT)	30W	5100Lm	3000Lm
XR5070-900	900*50*70mm(3FT)	40W	6800Lm	4000Lm
XR5070-1200	1200*50*70mm(4FT)	60W	10200Lm	6000Lm
XR5070-1500	1500*50*70mm(5FT)	95W	16150Lm	9500Lm
XR5070-2000	2000*50*70mm(7FT)	125W	21250Lm	12500Lm
XR5070-2400	2400*50*70mm(8FT)	150W	25500Lm	15000Lm
XR5070-3000	3000*50*70mm(10FT)	190W	32300Lm	19000Lm
XR5070-4000	4000*50*70mm(10FT)	190W	42700Lm	25200Lm
XR5070-5000	5000*50*70mm(16FT)	315W	53550Lm	31500Lm
XR5070-10000	10000*50*70mm(32FT)	620W	10540Lm	62000Lm

Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR5070-600	600*50*70mm(2FT)	30W	5100Lm	3000Lm
XR5070-900	900*50*70mm(3FT)	40W	6800Lm	4000Lm
XR5070-1200	1200*50*70mm(4FT)	60W	10200Lm	6000Lm
XR5070-1500	1500*50*70mm(5FT)	95W	16150Lm	9500Lm
XR5070-2000	2000*50*70mm(7FT)	125W	21250Lm	12500Lm
XR5070-2400	2400*50*70mm(8FT)	150W	25500Lm	15000Lm
XR5070-3000	3000*50*70mm(10FT)	190W	32300Lm	19000Lm
XR5070-4000	4000*50*70mm(10FT)	190W	42700Lm	25200Lm
XR5070-5000	5000*50*70mm(16FT)	315W	53550Lm	31500Lm
XR5070-10000	10000*50*70mm(32FT)	620W	10540Lm	62000Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor




PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light ,distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪，质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光，DALI调光，调色温驱动电源。
寿命长达5万小时，光衰小，减少后期维护费用。
灯具线条硬朗美观，外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

DIMENSION OPTIONS

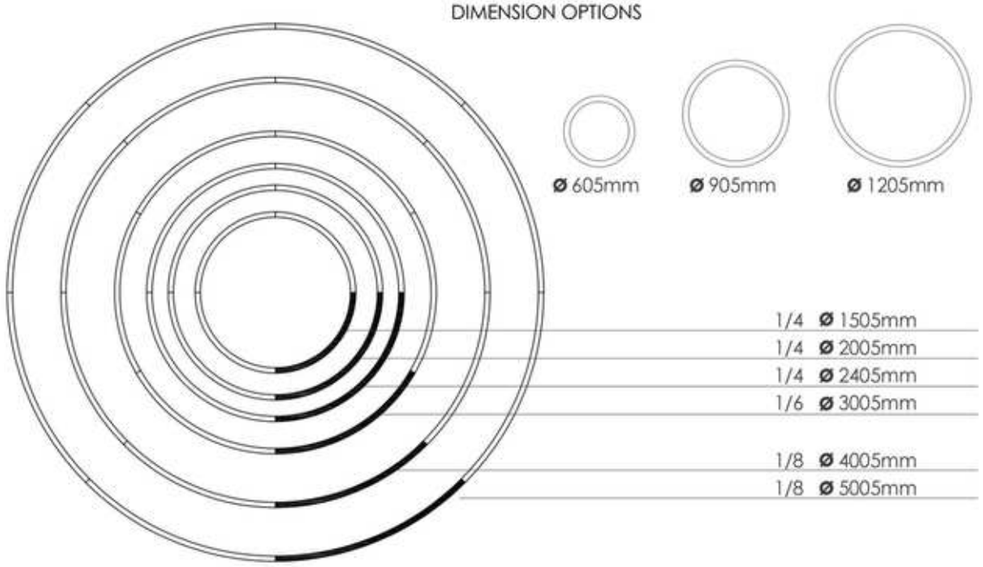

XR5070

XR3535

CIRCULAR RING

圆环



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR3535-600	600*35*35mm(2FT)	30W	5100Lm	1500Lm
XR3535-900	900*35*35mm(3FT)	40W	6800Lm	2000Lm
XR3535-1200	1200*35*35mm(4FT)	60W	10200Lm	3000Lm
XR3535-1500	1485*35*35mm(5FT)	95W	16150Lm	4750Lm
XR3535-2000	1985*35*35mm(7FT)	125W	21250Lm	6250Lm
XR3535-2400	2385*35*35mm(8FT)	150W	25500Lm	7500Lm
XR3535-3000	2985*35*35mm(10FT)	190W	32300Lm	9500Lm
XR3535-5000	4985*35*35mm(16FT)	315W	53550Lm	15750Lm
XR3535-10000	9985*35*35mm(32FT)	620W	10540Lm	31000Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor




PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light ,distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

DIMENSION OPTIONS

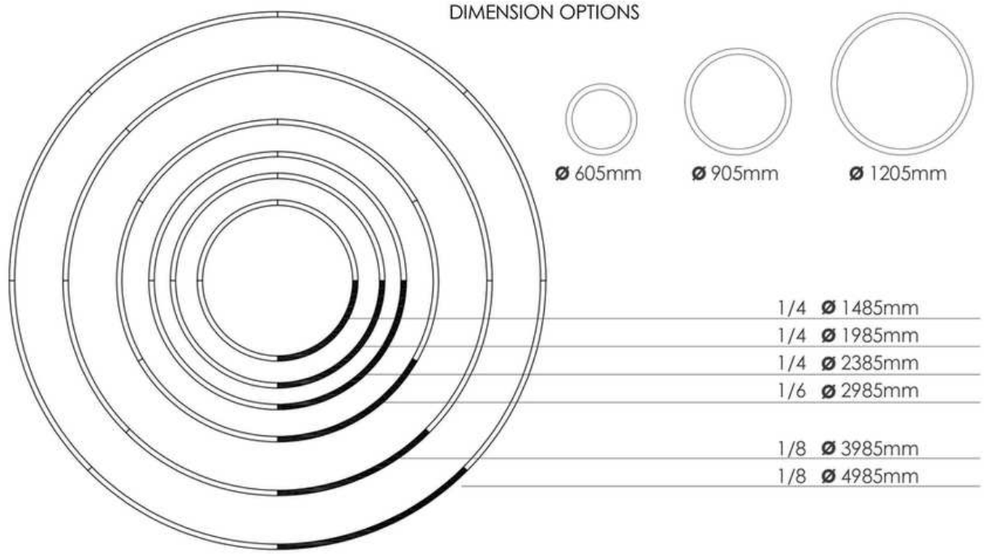

XR3535

XR6080

CIRCULAR RING

圆环



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR6080-610	610*60*80mm(2FT)	30W	5100Lm	3000Lm
XR6080-910	910*60*80mm(3FT)	40W	6800Lm	4000Lm
XR6080-1210	1210*60*80mm(4FT)	60W	10200Lm	6000Lm
XR6080-1510	1510*60*80mm(5FT)	95W	16150Lm	9500Lm
XR6080-2010	2010*60*80mm(7FT)	125W	21250Lm	12500Lm
XR6080-2410	2410*60*80mm(8FT)	150W	25500Lm	15000Lm
XR6080-3010	3010*60*80mm(10FT)	190W	32300Lm	19000Lm
XR6080-4010	4010*60*80mm(10FT)	252W	42700Lm	25200Lm
XR6080-5010	5010*60*80mm(16FT)	315W	53550Lm	31500Lm
XR6080-10010	10010*60*80mm(32FT)	620W	10540Lm	62000Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor




PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light .distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

DIMENSION OPTIONS

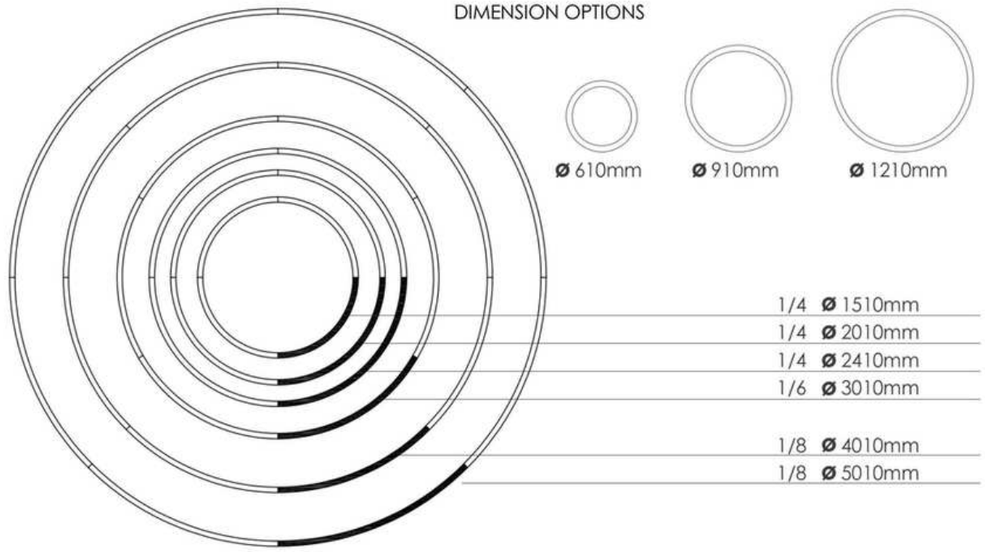


XR6080

XR6080IN

INSIDE LITE/CIRCULAR RING

内发光/圆环

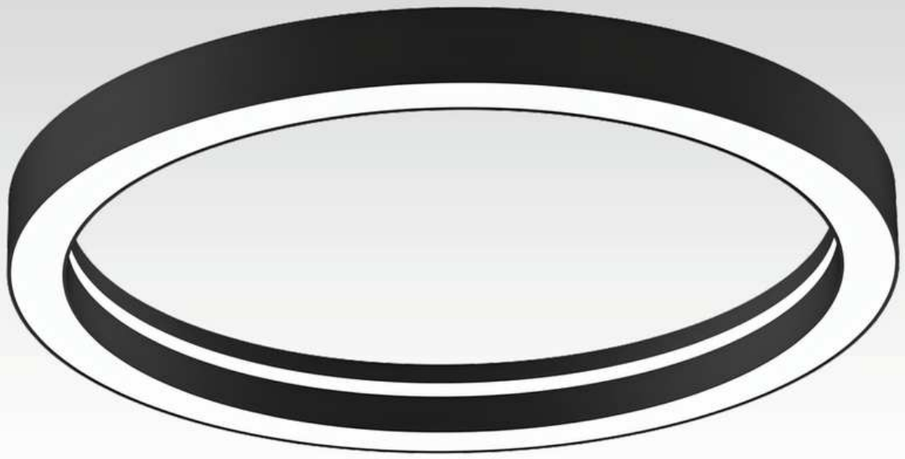



PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip,
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light ,distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR6080IN-610	610*60*80mm(2FT)	30W	5100Lm	3000Lm
XR6080IN-910	910*60*80mm(3FT)	40W	6800Lm	4000Lm
XR6080IN-1210	1210*60*80mm(4FT)	60W	10200Lm	6000Lm
XR6080IN-1510	1510*60*80mm(5FT)	95W	16150Lm	9500Lm
XR6080IN-2010	2010*60*80mm(7FT)	125W	21250Lm	12500Lm
XR6080IN-2410	2410*60*80mm(8FT)	150W	25500Lm	15000Lm
XR6080IN-3010	3010*60*80mm(10FT)	190W	32300Lm	19000Lm
XR6080IN-4010	4010*60*80mm(10FT)	252W	42700Lm	25200Lm
XR6080IN-5010	5010*60*80mm(16FT)	315W	53550Lm	31500Lm
XR6080IN-10010	10010*60*80mm(32FT)	620W	10540Lm	62000Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DIMENSION OPTIONS

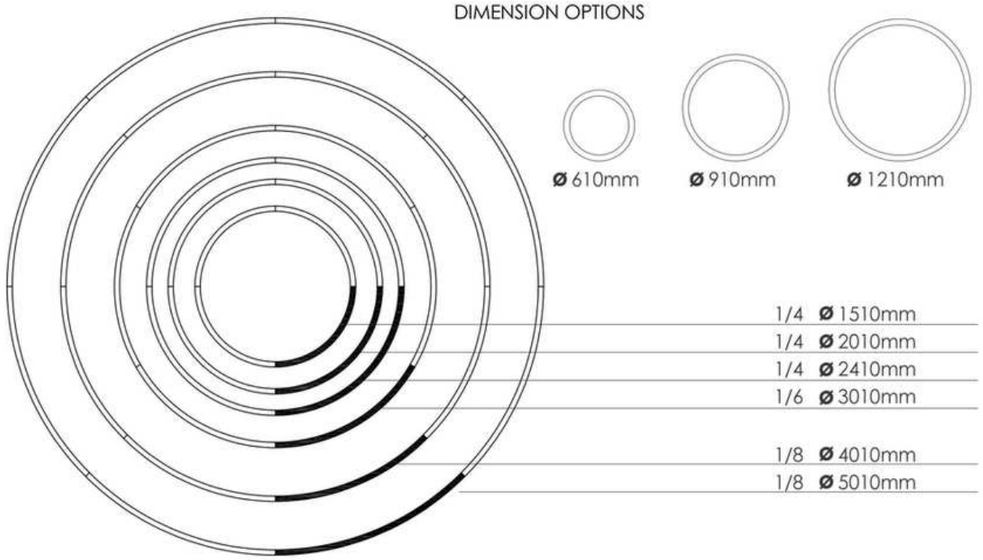

XR6080IN



Sura Providencia Branch. Architecture: OArquitectos. | Lighting Design: LEVO Studio.







Barto Offices | Architecture and Construction: CASBRO.





Murex Offices | Architecture and Lighting Design: Collective Architecture.

XR6540

RECESSED CIRCULAR RING

嵌入式圆环

TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR6540-615	615*65*40mm	30W	5100lm	3000lm
XR6540-915	915*65*40mm	40W	6800lm	4000lm
XR6540-1215	1215*65*40mm	60W	10200lm	6000lm
XR6540-1515	1515*65*40mm	95W	16150lm	9500lm
XR6540-2015	2015*65*40mm	125W	21250lm	12500lm
XR6540-2415	2415*65*40mm	150W	25500lm	15000lm
XR6540-3015	3015*65*40mm	190W	32300lm	19000lm
XR6540-4015	4015*65*40mm	252W	42700lm	25200lm
XR6540-5015	5015*65*40mm	315W	53500lm	31500lm
XR6540-10015	10015*65*40mm	620W	105400lm	62000lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor


Indoor 室内使用 | General lighting 基础照明 | High efficiency 高光效 | Low energy consumption 低能耗 | Anti glare 防眩光 | Accurate light distribution 精准光 | No flickering 无频闪 | Long life 长寿命 | IP20 Protection level 防护等级

PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip,
· Options for 1-10V dimming,dali dimming and color changing driver,
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light ,distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

DETAIL 细节

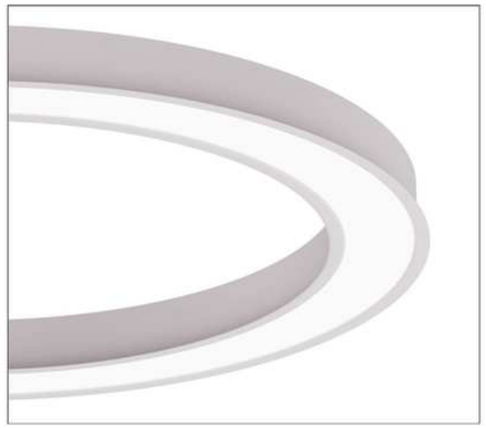



XR6540

XR7042

RECESSED CIRCULAR RING

嵌入式圆环





PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip,
· Options for 1-10V dimming,dali dimming and color changing driver,
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light ,distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR7042-620	620*70*42mm	30W	5100Lm	1500Lm
XR7042-920	920*70*42mm	40W	6800Lm	2000Lm
XR7042-1220	1220*70*42mm	60W	10200Lm	3000Lm
XR7042-1520	1520*70*42mm	95W	16150Lm	4750Lm
XR7042-2020	2020*70*42mm	125W	21250Lm	6250Lm
XR7042-2420	2420*70*42mm	150W	25500Lm	7500Lm
XR7042-3000	3020*70*42mm	190W	32300Lm	9500Lm
XR7042-4000	4020*70*42mm	252W	42700Lm	12600Lm
XR7042-5000	5020*70*42mm	315W	53550Lm	15750Lm
XR7042-10000	10020*70*42m	620W	10540Lm	31000Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DIMENSION OPTIONS

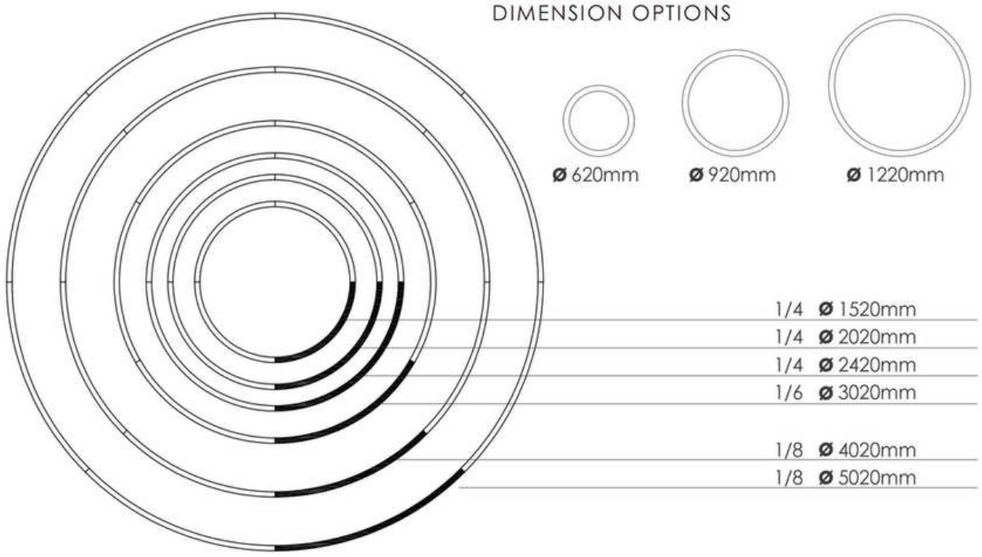

XR7042

CROMATIX®
Lighting Intelligence



OPTICS
CURVE

- Patented oval lens reflector design for superior light control.
- Multiple solutions available to meet different project requirements.
- Total flexibility, customize and configure to fit your needs.
- High-efficiency lighting with superior glare control.
- Can be configured as curves, circles, or straight lines.
- Easily connected to form custom shapes as requested.

08
Color Options

03
Dimming Options

05
Size Options

02
Mounting Options


CROMATIX®
Lighting Intelligence

LS3870L2

LENS
透镜





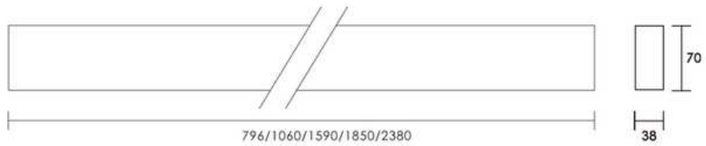

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip.
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3870L2-1060	1060*38*70mm	24W	4080Lm	2160Lm
LS3870L2-1590	1590*38*70mm	36W	6120Lm	3240Lm
LS3870L2-1850	1850*38*70mm	40W	6800Lm	3600Lm
LS3870L2-2380	2112*38*70mm	48W	8160Lm	4320Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线




Accessories 配件



LS3870L2

CROMATIX®
Lighting Intelligence

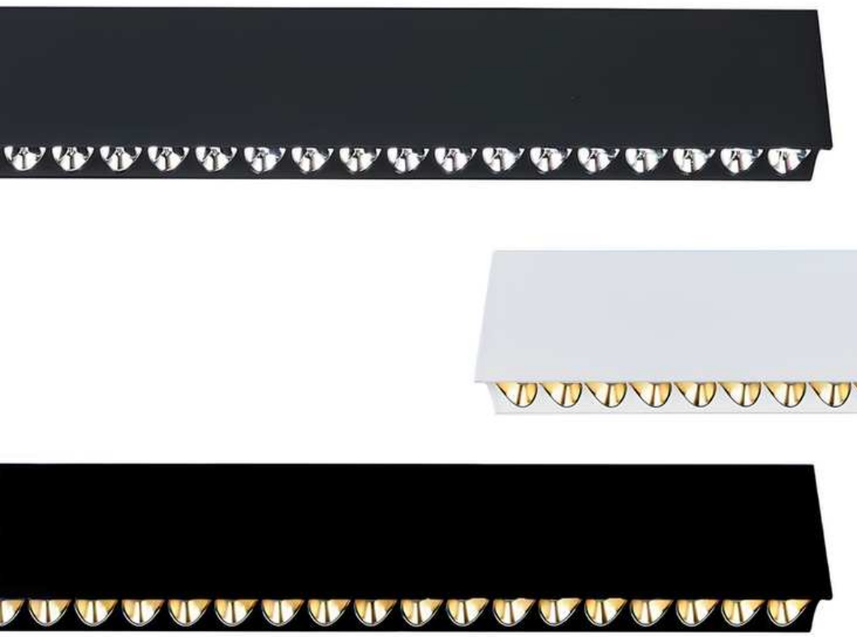




UGR < 19

- Patented oval lens reflector design for precise light control.
- Multiple solutions available to meet diverse project requirements.
- DIY flexibility allows clients to customize and select according to their needs.
- High-efficiency light distribution with no shadows and anti-glare performance.
- Configurable as curves, circles, or straight lines.
- Easily connected to form custom shapes as requested.

UGR<19

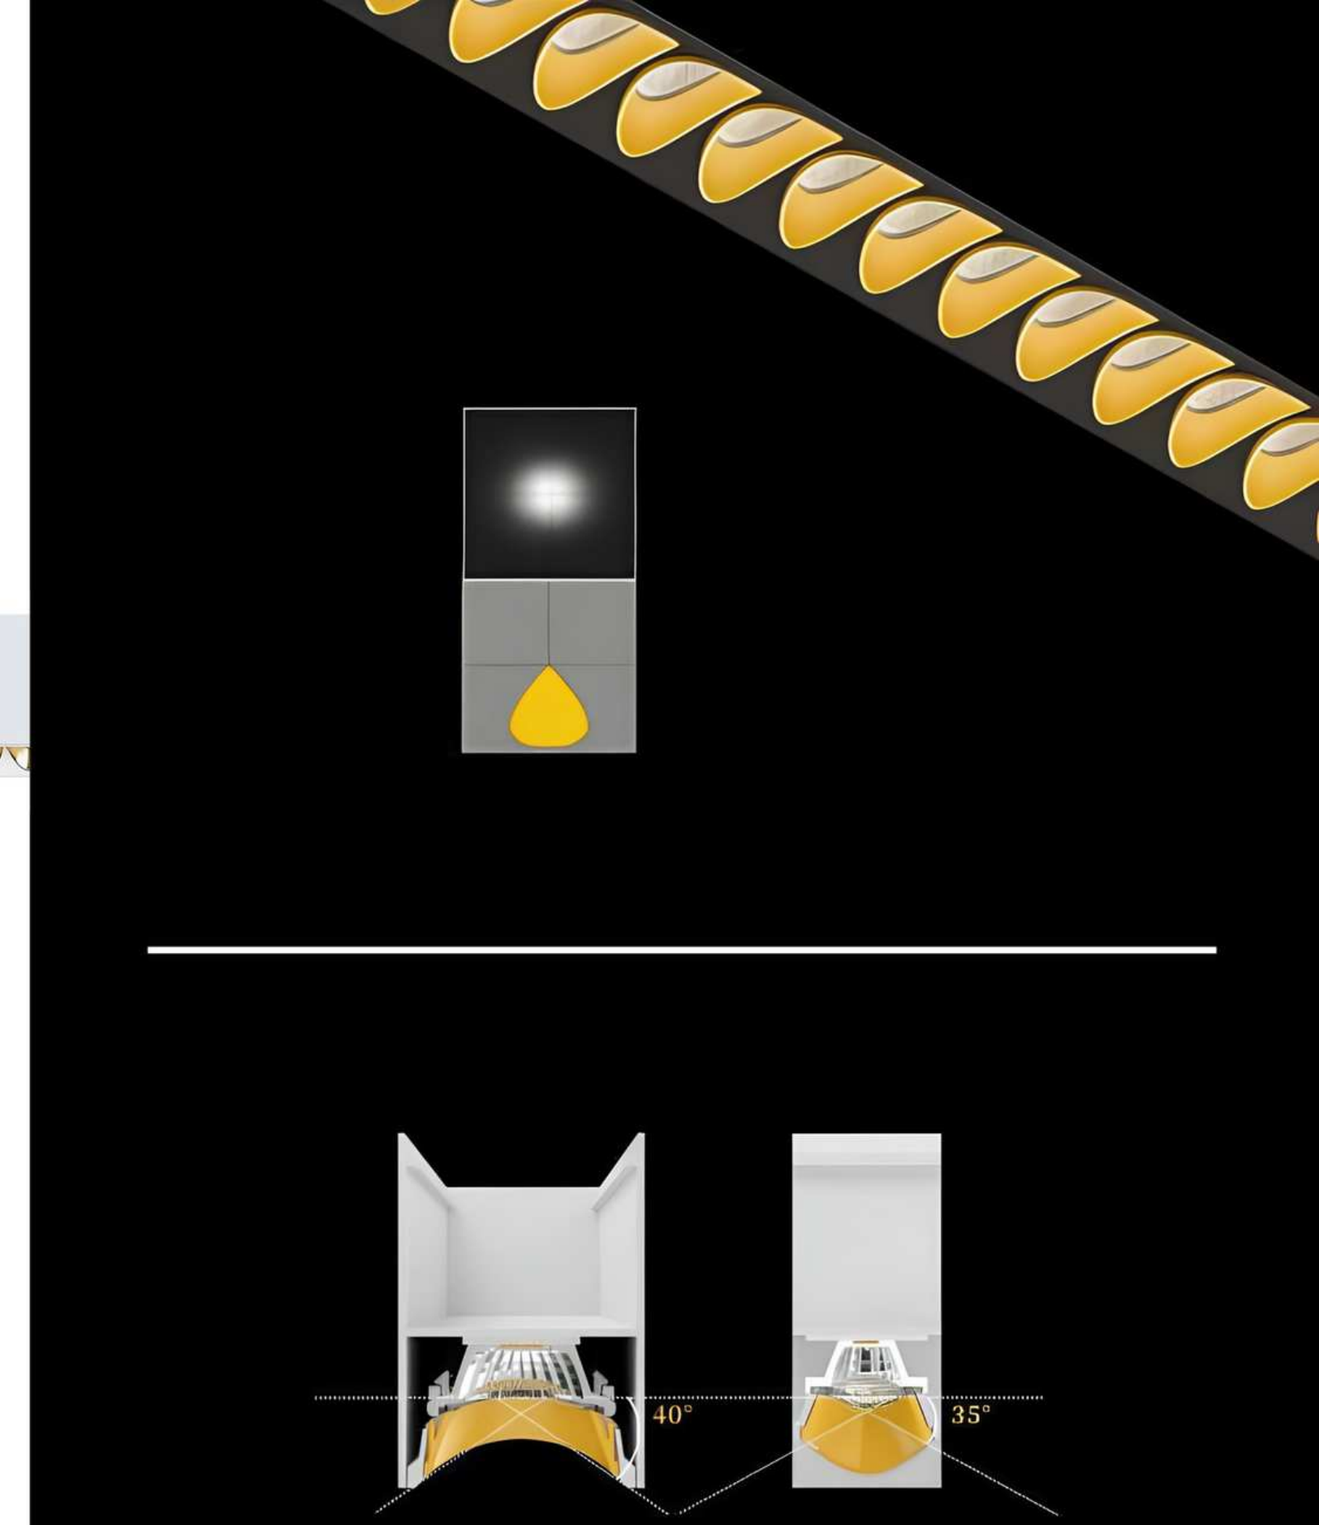

XR3870

CIRCULAR RING

圆环





PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip,
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light .distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR3870-300	300*38*70mm	18W	3060Lm	1500Lm
XR3870-450	450*38*70mm	24W	4080Lm	2160Lm
XR3870-650	650*38*70mm	40W	5400Lm	3600Lm
XR3870-900	900*38*70mm	60W	10200Lm	5400Lm
XR3870-1200	1200*38*70mm	72W	12240Lm	6480Lm

Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR3870U-300	300*38*70mm	27W	4590Lm	2430Lm
XR3870U-450	450*38*70mm	36W	6120Lm	3240Lm
XR3870U-650	650*38*70mm	60W	10200Lm	5400Lm
XR3870U-900	900*38*70mm	90W	15300Lm	8100Lm
XR3870U-1200	1200*38*70mm	108W	18360Lm	9720Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DIMENSION OPTIONS

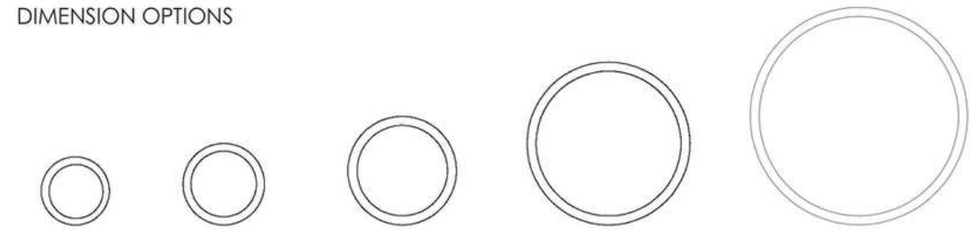



XR3870









1.Pastelería JO | Interiors and Lighting Design: Bassi Design | 2. BNP Paribas Cardif | Architecture and Lighting Design: Grupo E.
3. BLCK COFFE AND BAR: Architecture and Interiors: Dual Arquitectas. | 4. BCI PAGOS Office . Architecture and Lighting Design: Collective Architecture.







Indura Offices | Architecture: Armas Elton Arquitectos. | Lighting Design: Diseño de Luz.





ISA ENERGIA Offices. Architecture and Construction: CASBRO.













1 - 2. Golden Oak Offices | Architecture and Lighting Design: Espiral Arquitectos. | 3. MK Offices | Architecture and Lighting Design: OArquitectos. 4 - 5. ISA ENERGIA Offices | Architecture and Construction: CASBRO.

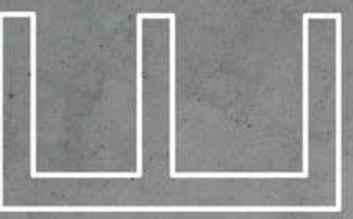

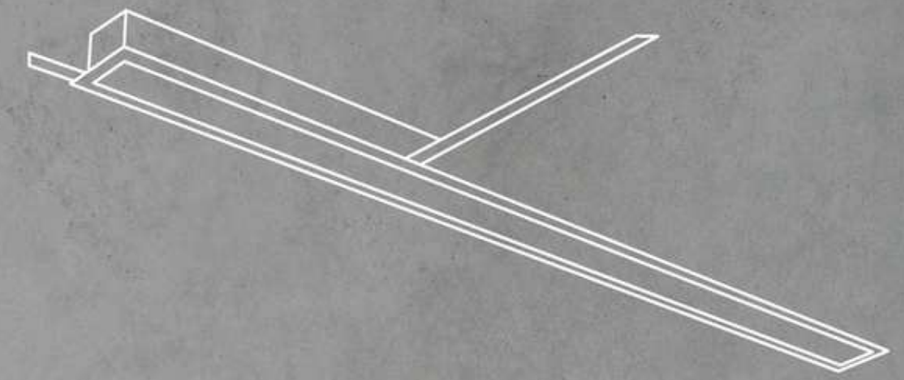



XLINE
SERIES

SUSPENDED | SURFACE | RECESSED

XLINE SERIES

SURFACE | SUSPENDED

Elegant and versatile, XLINE in its surface and suspended version redefines architectural lighting with clean lines and refined performance. Designed in aluminum profiles with an integrated electronic driver, it offers multiple possibilities: opal or microprismatic diffusers, Eurostandard three-phase track electrification, or optical modules for focal lighting. A system where technical precision meets contemporary aesthetics, delivering powerful light while offering creative freedom to enhance interior architecture.

Its strength lies in flexibility: it can be used as a stand-alone luminaire or as part of a continuous line system, achieving high luminous levels and varied lighting effects. Thanks to its different connectors, XLINE also enables the creation of geometric shapes and unique compositions, transforming light into a creative tool for design and architecture.

More than a lighting profile, XLINE is a professional solution that combines efficiency, performance, and design versatility for projects that demand the best.



GWJA Lawyers's Office | Lighting Design: Victoria Campino | Interior Design: Maria Luisa Zegers and Rosario Figueroa.




WATER RESISTANCE

Protection you can rely on

XLINE6590P

HIGHER PROTECTION, SAME XLINE PERFORMANCE

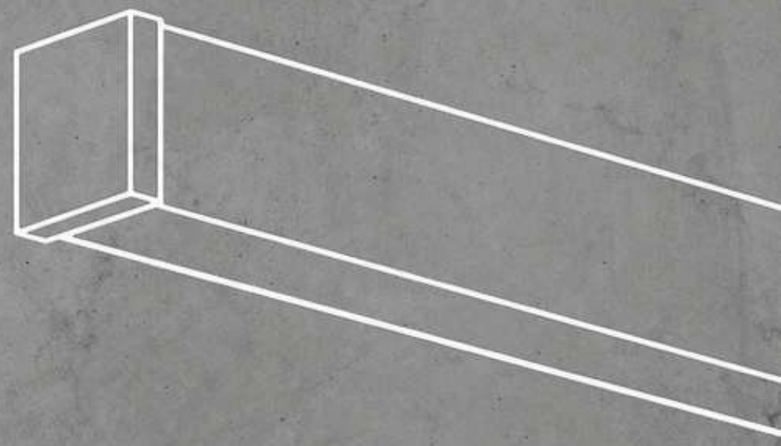


XLINE

LS6590

OPAL DIFFUSER **IP65**

乳白罩



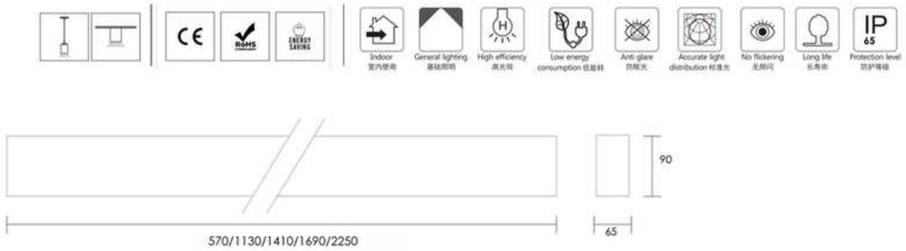

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip.
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6590-600	580*65*90mm(2FT)	18W	3060lm	1980lm
LS6590-1200	1140*65*90mm(4FT)	36W	6120lm	3960lm
LS6590-1500	1420*65*90mm(5FT)	45W	7650lm	4950lm
LS6590-1800	1700*65*90mm(6FT)	54W	9180lm	5940lm
LS6590-2400	2260*65*90mm(8FT)	72W	12240lm	7920lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V ■ DALI
Emergency	□ None □ 3 hours
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节

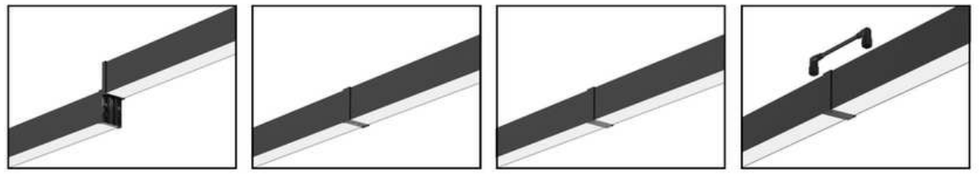

IP65 HIGHER PROTECTION, SAME XLINE PERFORMANCE

LS6590

FAST CONNECTION

This system redefines simplicity with an effortless fast-connection technology. Its innovative slide-in and slide-out mechanism eliminates the need for screws and complex assembly, enabling a seamless plug-and-play installation that reduces setup time by up to 70% compared to traditional systems.

TOOL FREE

Designed for true convenience, the intuitive, tool-free system allows fixtures to snap into place effortlessly — no tools, no wiring complexity, and no technical expertise required. It brings speed, flexibility, and precision to every lighting configuration.

ONE CLICK

Engineered for secure and reliable performance, each module connects through an interlocking mechanism with a single click. This ensures perfect alignment, structural stability, and safe handling during installation.

NO LIGHT LEAKAGE

A refined connection system prevents light from escaping sideways, creating a continuous and uniform line of illumination. It enhances visual comfort and preserves the elegance of every space.

All these features make this system ideal for rapid customization across residential, commercial, and event lighting environments. Perfect for projects that demand speed, precision, and sophistication, it is also a premium choice for high-end architectural applications.

CONNECTION **INSTALLATION**

CONNECT MAIN EXTRUSION BY SLIDING IN FROM THE SIDES 1

PUSH THE TRAY PROFILE INTO MAIN EXTRUSION TWIST THE FIXATION SCREWS 2

FIX OPAL ROLLING DIFFUSER MAX 50 METERS 3



LS6285P

OPAL DIFFUSER

乳白罩



Quick-Connect
System



PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip.
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小，减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观，外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6285P-600	570×62×85mm (2FT)	18W	3060Lm	1980Lm
LS6285P-1200	1130×62×85mm (4FT)	36W	6120Lm	3960Lm
LS6285P-1500	1410×62×85mm (5FT)	45W	7650Lm	4950Lm
LS6285P-1800	1690×62×85mm (6FT)	54W	9180Lm	5940Lm
LS6285P-2400	2250×62×85mm (8FT)	72W	12240Lm	7920Lm




Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6285PU-600	570×62×85mm (2FT)	27W	4590Lm	2970Lm
LS6285PU-1200	1130×62×85mm (4FT)	45W	7650Lm	4950Lm
LS6285PU-1500	1410×62×85mm (5FT)	67W	11390Lm	7370Lm
LS6285PU-1800	1690×62×85mm (6FT)	81W	13770Lm	8910Lm
LS6285PU-2400	2250×62×85mm (8FT)	108W	18360Lm	11880Lm

PRODUCT OPTION 可选产品配置

CCT	↗ 3CCT ■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V DALI
Emergency	□ None □ 3 hours
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

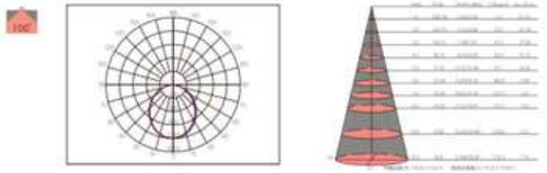

CONTINUOUS 连接件



180° Extender
直连接件

L Shape Corner
L字形连接件



T Shape Corner
T字形连接件



X Shape Corner
十字形连接件

DETAIL 细节



SURFACE MOUNTING CLIP

Accessories 配件



*For retail or wholesale, you can buy accessories separately. 零售或批发，配件可单独购买。
*For project, you can tell us what exactly you want we will recommend relatively proper accessories.工程项目，请告知你的要求，我们会推荐合适配件。

LS6285P

LS6285PM

PRISMATIC DIFFUSER
UG6<19

檢品防眩罩
胝光值<19





PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip.
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小，减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6285PM-600	570*62*85MM	18W	3060Lm	1800Lm
LS6285PM-1200	1130*62*85MM	36W	6120Lm	3600Lm
LS6285PM-1400	1400*62*85MM	45W	7650Lm	4500Lm
LS6285PM-1800	1690*62*85MM	54W	9180Lm	5400Lm
LS6285PM-2400	2250*62*85MM	72W	12240Lm	7200Lm

Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6285PMU-600	570*62*85MM	27W	4590Lm	2700Lm
LS6285PMU-1200	1130*62*85MM	54W	9180Lm	5400Lm
LS6285PMU-1400	1400*62*85MM	63W	10710Lm	6300Lm
LS6285PMU-1800	1690*62*85MM	81W	13770Lm	8100Lm
LS6285PMU-2400	2250*62*85MM	108W	18360Lm	10800Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V DALI
Emergency	□ None □ 3 hours
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

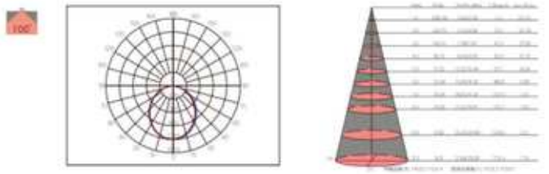

CONTINUOUS 连接件


180° Extender
直连接件


L Shape Corner
L字形连接件


T Shape Corner
T字形连接件


X Shape Corner
十字形连接件

DETAIL 细节



SURFACE MOUNTING CLIP


Accessories 配件



*For retail or wholesale, you can buy accessories separately. 零售或批发，配件可单独购买。
*For project, you can tell us what exactly you want we will recommend relatively proper accessories.工程项目，请告知你的要求，我们会推荐合适配件。


LS6285PM

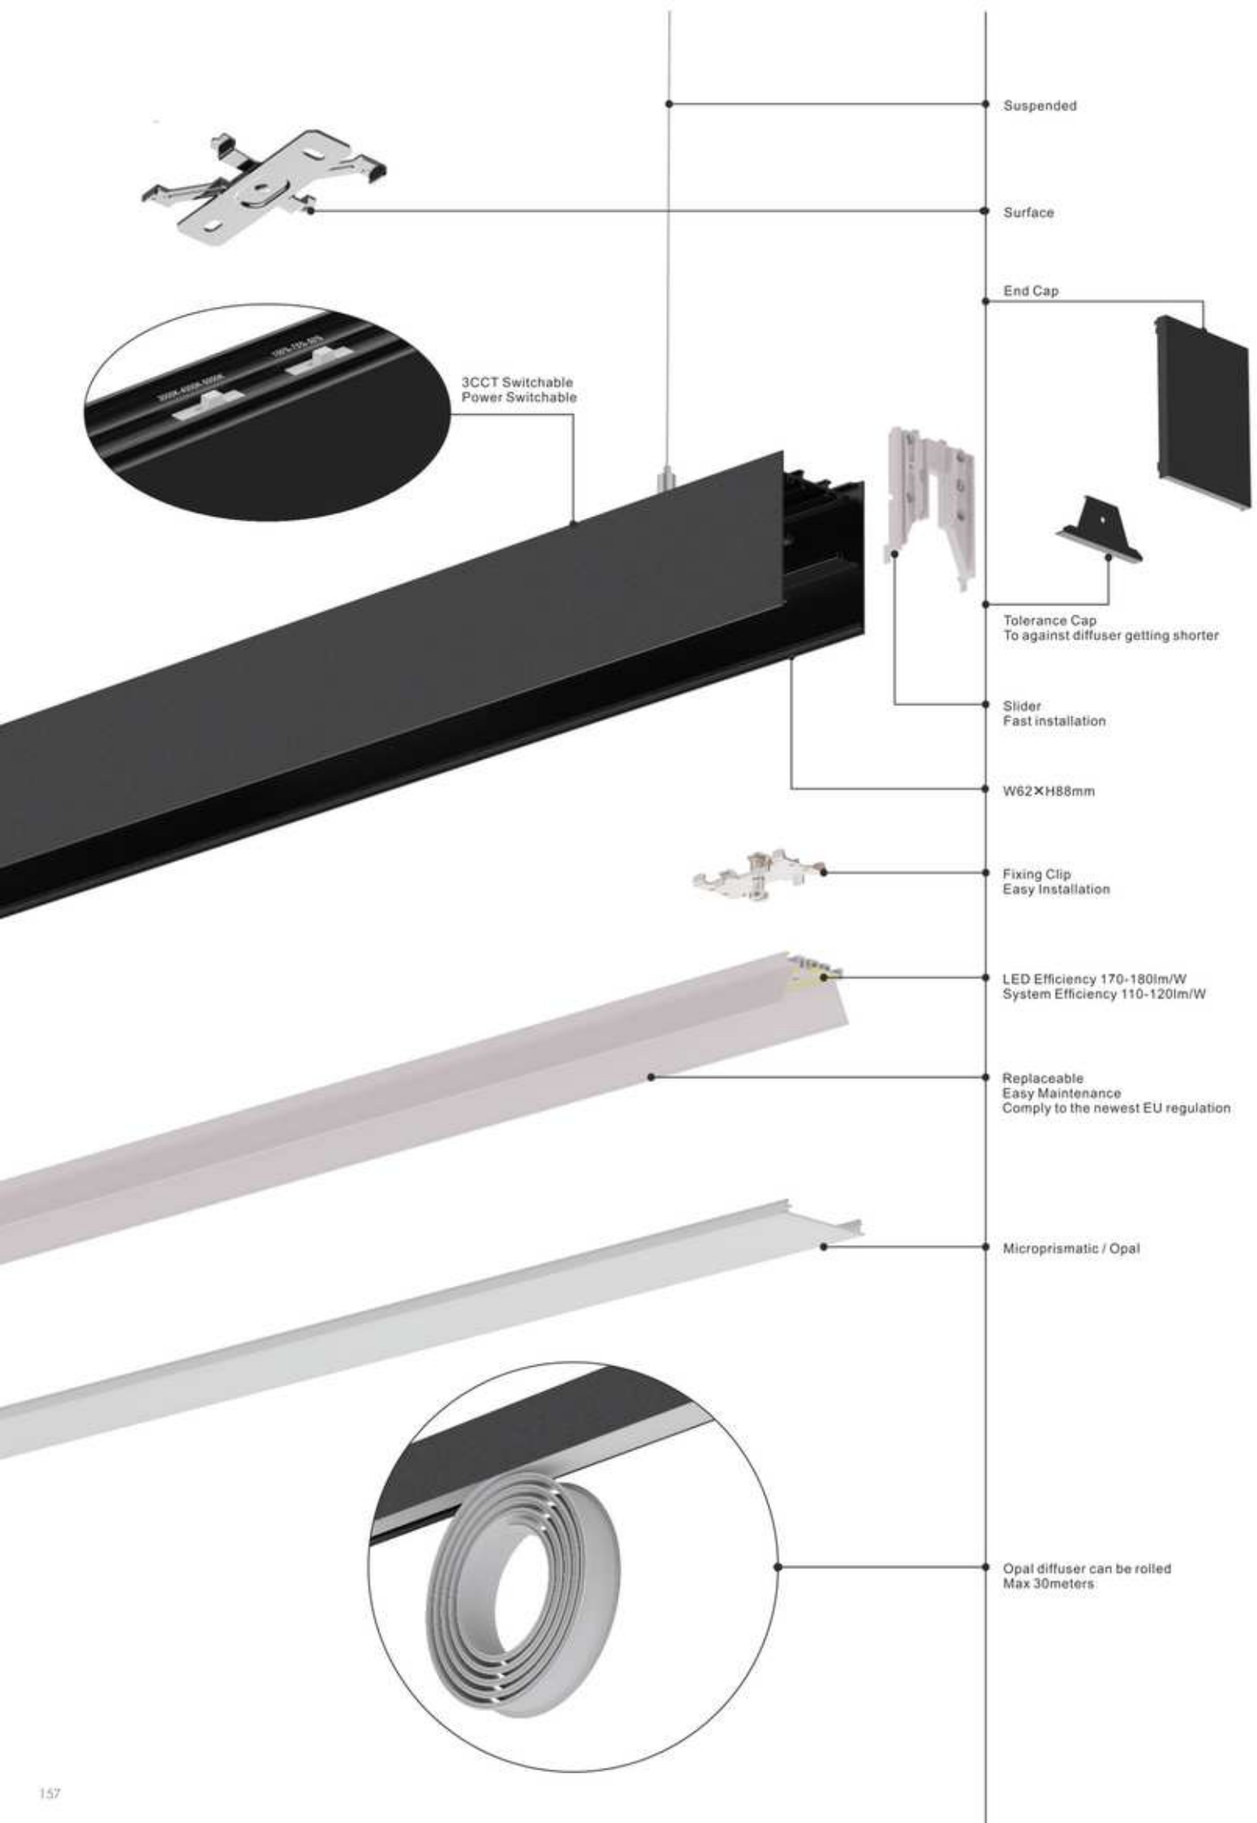
Suspended
Surface
End Cap
3CCT Switchable
Power Switchable
Tolerance Cap
To against diffuser getting shorter
Slider
Fast installation
W62×H88mm
Fixing Clip
Easy Installation
LED Efficiency 170-180lm/W
System Efficiency 110-120lm/W
Replaceable
Easy Maintenance
Comply to the newest EU regulation
Microprismatic / Opal
Opal diffuser can be rolled
Max 30meters

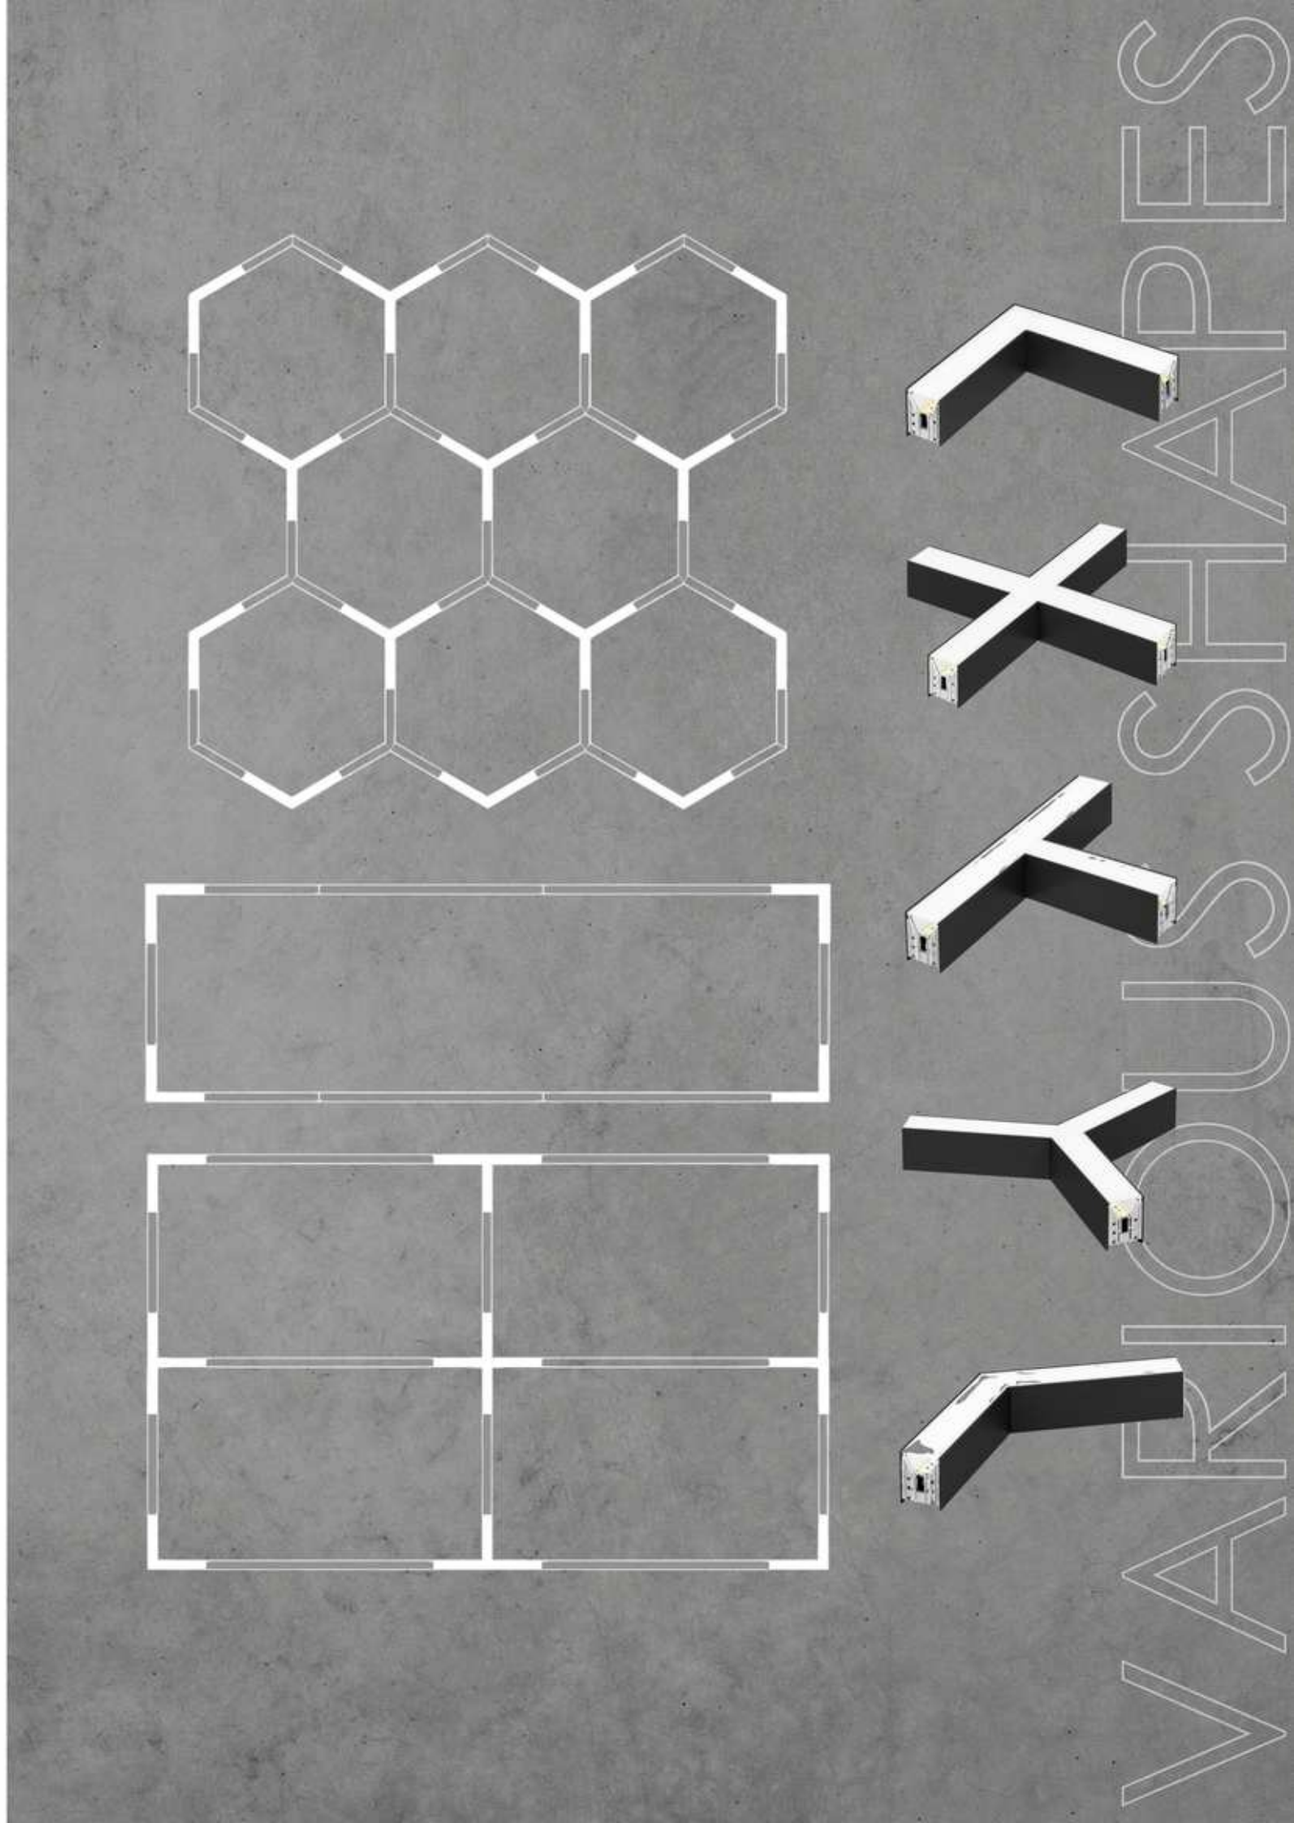
SHAPES
VARIOUS

DESIGN
POSSIBILITIES

Free your creativity

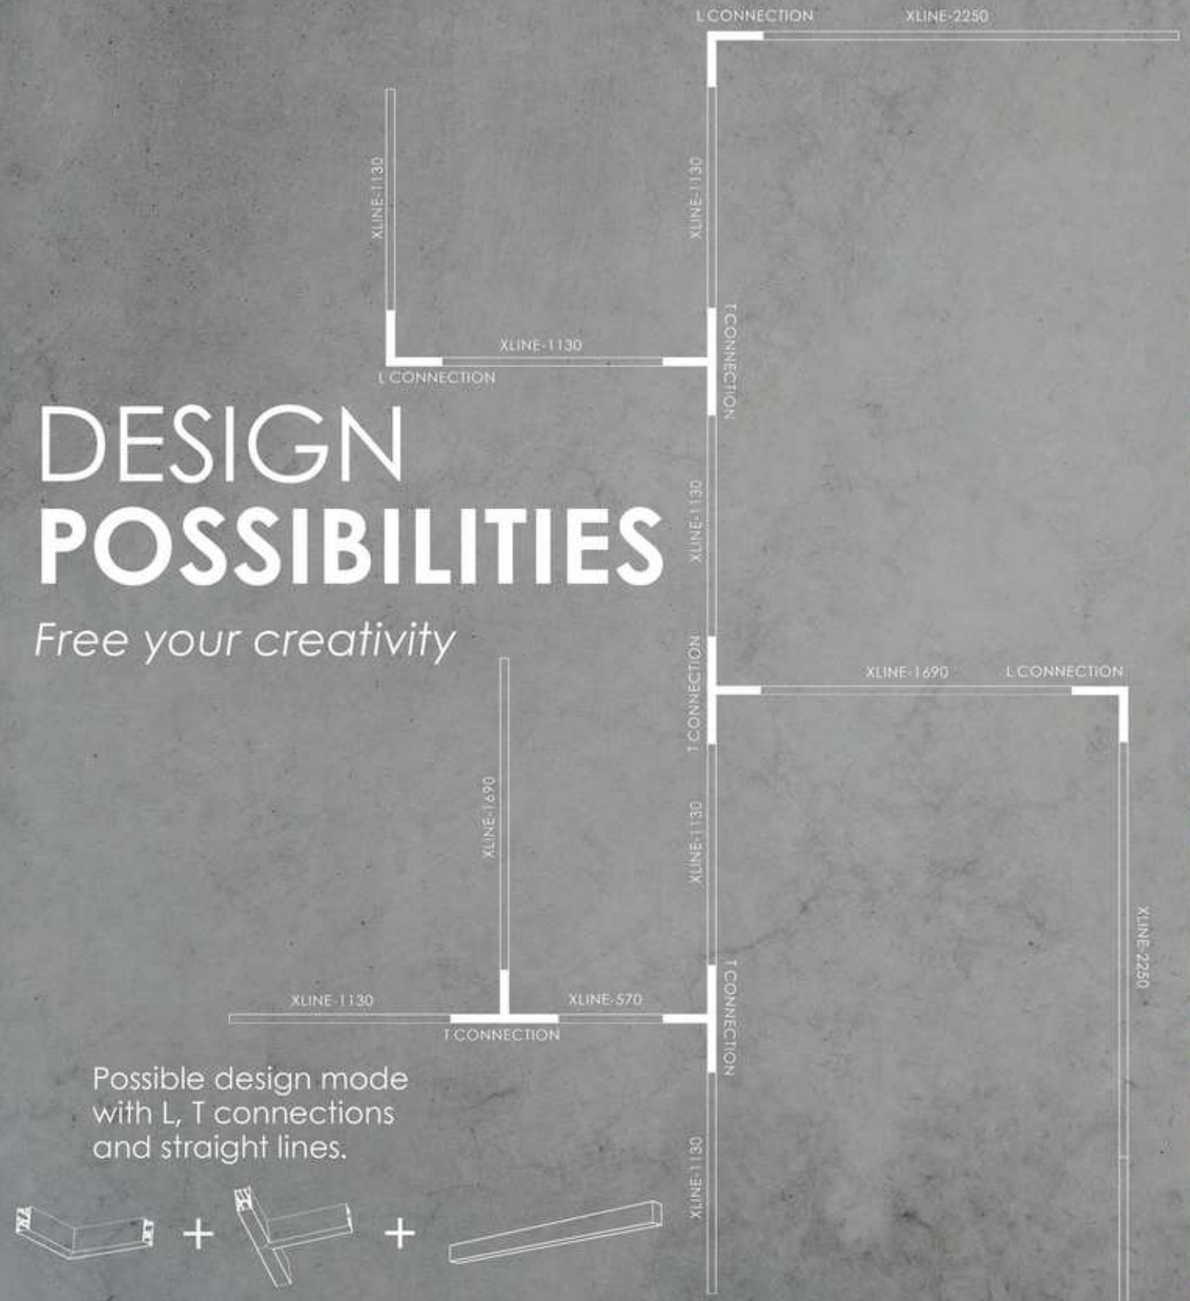

Possible design mode
with L, T connections
and straight lines.



INERSA Offices | Architecture: Nicolas Arancibia. | Lighting Design: Diseño de Luz.





1. BCI Pagos Offices | Architecture and Lighting Design: Collective Architecture. | 2. BNP Paribas Cardif Offices | Architecture and Lighting Design: Grupo E.







1. BNP Paribas Cardif Offices | Architecture and Lighting Design: Grupo E. | 2. IGS Group Offices | Architecture: Elton y Leniz Arquitectos. | Lighting Design: LEVO Studio. 3. Turbus Bus Station | Architecture: Estudio FES | Lighting Design: Diseño de Luz.

CROMATIX®
Lighting Intelligence

POWER SWITCHABLE

Traditionally, adjusting the power of a luminaire required the use of dimmable drivers and an external dimmer.
With our new Power Switchable system, users can now switch power levels easily and cost-effectively, making lighting control more accessible and efficient.

CCT CHANGEABLE

The CCT Changeable feature allows users to modify the color temperature according to their needs, preferences, or the specific task at hand.

With a simple DIP switch, it is possible to transition from a warm, cozy atmosphere to a bright, energizing environment, providing flexibility and comfort in any space.





LS2555P

OPAL DIFFUSER

乳白罩



TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS2555P-600	570*25*55mm(2FT)	12W	2040Lm	960Lm
LS2555P-1200	1130*25*55mm(4FT)	24W	4080Lm	19200Lm
LS2555P-1500	1410*25*55mm(5FT)	30W	5100Lm	2400Lm
LS2555P-1800	1690*25*55mm(6FT)	36W	6120Lm	2880Lm
LS2555P-2400	2250*25*55mm(8FT)	48W	8160Lm	3840Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS2555P-600	570*25*55mm(2FT)	12W	2040Lm	960Lm
LS2555P-1200	1130*25*55mm(4FT)	24W	4080Lm	19200Lm
LS2555P-1500	1410*25*55mm(5FT)	30W	5100Lm	2400Lm
LS2555P-1800	1690*25*55mm(6FT)	36W	6120Lm	2880Lm
LS2555P-2400	2250*25*55mm(8FT)	48W	8160Lm	3840Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor



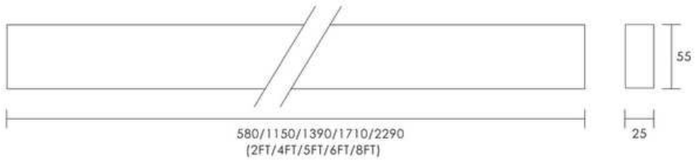


PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip,
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

Accessories 配件

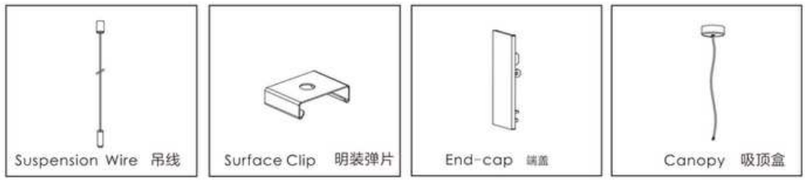

LS2555P

LS2555L2

LENS

透镜



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS2555L2-600	580*25*55mm(2FT)	15W	2550Lm	1200Lm
LS2555L2-1200	1150*25*55mm(4FT)	30W	5100Lm	2400Lm
LS2555L2-1500	1390*25*55mm(5FT)	38W	6460Lm	3040Lm
LS2555L2-1800	1720*25*55mm(6FT)	45W	7650Lm	3600Lm
LS2555L2-2400	2290*25*55mm(8FT)	60W	10200Lm	4800Lm


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS2555L2-600	580*25*55mm(2FT)	15W	2550Lm	1200Lm
LS2555L2-1200	1150*25*55mm(4FT)	30W	5100Lm	2400Lm
LS2555L2-1500	1390*25*55mm(5FT)	38W	6460Lm	3040Lm
LS2555L2-1800	1720*25*55mm(6FT)	45W	7650Lm	3600Lm
LS2555L2-2400	2290*25*55mm(8FT)	60W	10200Lm	4800Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



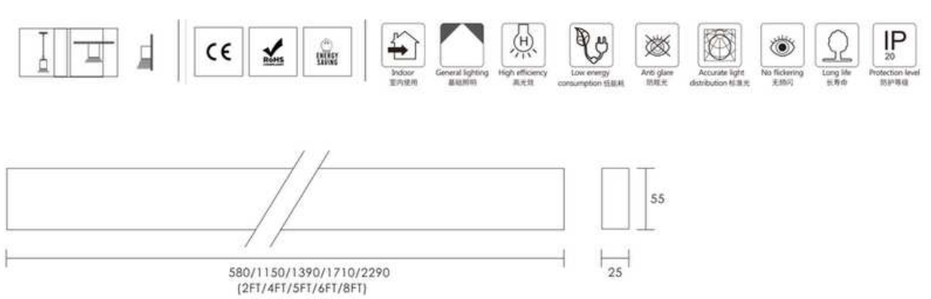


PRODUCT FEATURE 产品特点


· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

LIGHT DISTRIBUTION CURVE 光强分布曲线

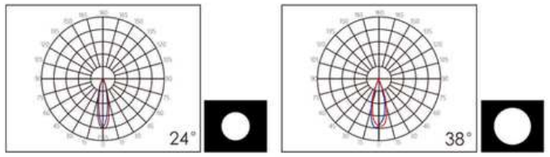

Accessories 配件

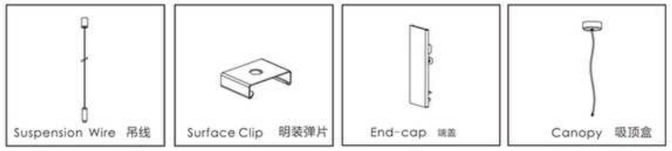


LS2555L2

LS3535P

OPAL DIFFUSER



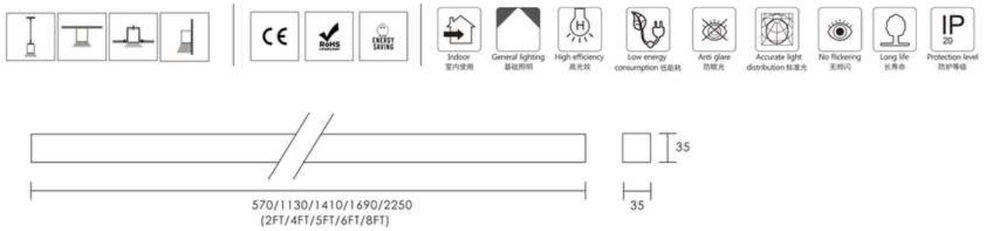

PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip,
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观，外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3535P-600	570*35*35mm(2FT)	9W	1530Lm	900Lm
LS3535P-1200	1130*35*35mm(4FT)	18W	3060Lm	1800Lm
LS3535P-1500	1410*35*35mm(5FT)	22W	3740Lm	2200Lm
LS3535P-1800	1690*35*35mm(6FT)	27W	4590Lm	2700Lm
LS3535P-2400	2250*35*35mm(8FT)	36W	6120Lm	3600Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3535PU-600	570*35*35mm(2FT)	18W	3060Lm	1800Lm
LS3535PU-1200	1130*35*35mm(4FT)	36W	6120Lm	3600Lm
LS3535PU-1500	1410*35*35mm(5FT)	44W	7480Lm	4400Lm
LS3535PU-1800	1690*35*35mm(6FT)	54W	9180Lm	5400Lm
LS3535PU-2400	2250*35*35mm(8FT)	72W	12240Lm	7200Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ▫ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor


LIGHT DISTRIBUTION CURVE 光强分布曲线

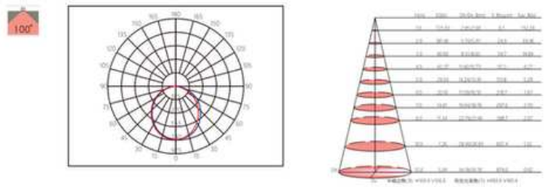

CONTINUOUS 连接件

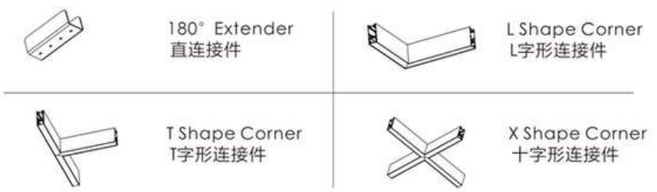

Accessories 配件

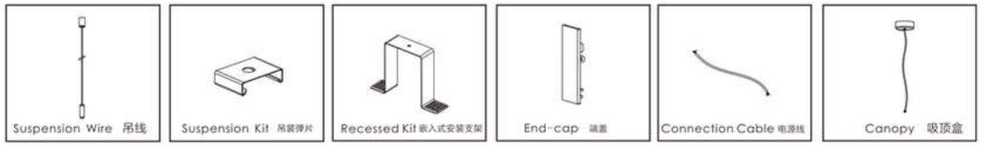

*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。


LS3535P

MK Offices | Architecture and Lighting Design: OArquitectos.

LS3580P

OPAL DIFFUSER



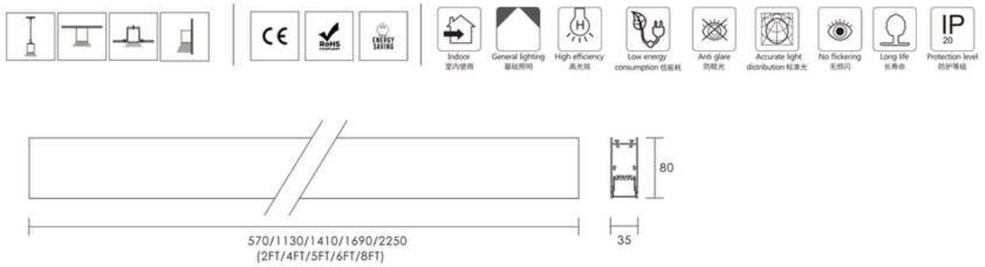

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3580P-600	570*35*80mm(2FT)	18W	3060Lm	1800Lm
LS3580P-1200	1130*35*80mm(4FT)	36W	6120Lm	3600Lm
LS3580P-1500	1410*35*80mm(5FT)	45W	7650Lm	4500Lm
LS3580P-1800	1690*35*80mm(6FT)	54W	9180Lm	5400Lm
LS3580P-2400	2250*35*80mm(8FT)	72W	12240Lm	7200Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3580PU-600	570*35*80mm(2FT)	27W	4590Lm	2700Lm
LS3580PU-1200	1130*35*80mm(4FT)	54W	9180Lm	5400Lm
LS3580PU-1500	1410*35*80mm(5FT)	63W	10710Lm	6300Lm
LS3580PU-1800	1690*35*80mm(6FT)	81W	13770Lm	8100Lm
LS3580PU-2400	2250*35*80mm(8FT)	108W	18360Lm	10800Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

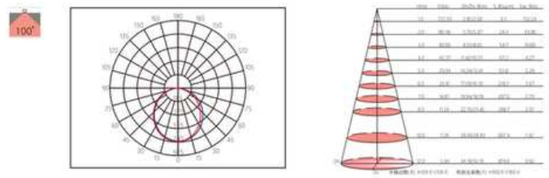

CONTINUOUS 连接件



180° Extender
直连接件


L Shape Corner
L字形连接件



T Shape Corner
T字形连接件


X Shape Corner
十字形连接件

DETAIL 细节



Accessories 配件

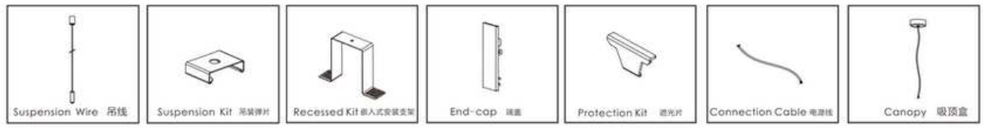

*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LS3580P


LS3580PM

PRISMATIC DIFFUSER
UGE<19

核晶防胶罩
胶光值<19





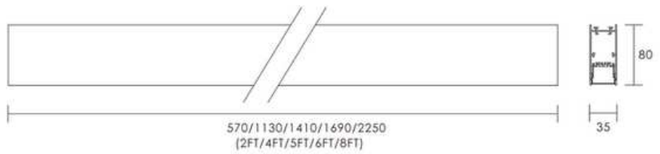

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3580PM-600	570*35*80mm(2FT)	18W	3060Lm	1440Lm
LS3580PM-1200	1130*35*80mm(4FT)	36W	6120Lm	2880Lm
LS3580PM-1500	1410*35*80mm(5FT)	45W	7650Lm	3600Lm
LS3580PM-1800	1690*35*80mm(6FT)	54W	9180Lm	4320Lm
LS3580PM-2400	2250*35*80mm(8FT)	72W	12240Lm	5760Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3580PMU-600	570*35*80mm(2FT)	27W	4590Lm	2430Lm
LS3580PMU-1200	1130*35*80mm(4FT)	54W	9180Lm	4860Lm
LS3580PMU-1500	1410*35*80mm(5FT)	63W	10710Lm	5670Lm
LS3580PMU-1800	1690*35*80mm(6FT)	81W	13770Lm	7290Lm
LS3580PMU-2400	2250*35*80mm(8FT)	108W	18360Lm	9720Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black □ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

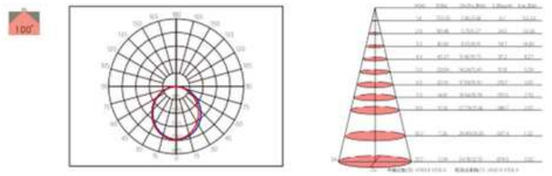

CONTINUOUS 连接件



180° Extender
直连接件



L Shape Corner
L字形连接件




T Shape Corner
T字形连接件



X Shape Corner
十字形连接件

DETAIL 细节



Accessories 配件



*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LS3580PM







Residential Project | Architecture: Gonzalo Martinez.








1. Showroom BASH Vespucio | Architecture: WORKPLACES. | 2. Transtel Offices | Architecture: Espiral Architecture.
3. Novo Nordisk Offices | Architecture: FMZ Arquitectura | Lighting Design: Docevolts-Francisca Nicoletti.

LS3580L1

OPTIC LENS



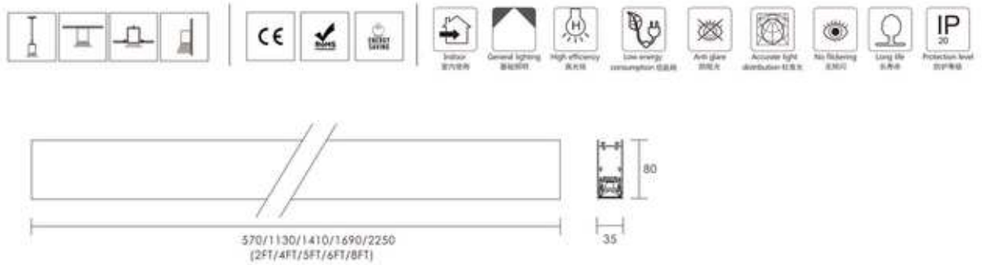


PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency optic lens ,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪，质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光，调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条梗断美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3580L1-600	570*35*80mm(2FT)	2*5W	1400Lm	900Lm
LS3580L1-1200	1130*35*80mm(4FT)	4*5W	2800Lm	1800Lm
LS3580L1-1500	1410*35*80mm(5FT)	6*5W	4200Lm	2700Lm
LS3580L1-1800	1690*35*80mm(6FT)	6*5W	4200Lm	2700Lm
LS3580L1-2400	2250*35*80mm(8FT)	8*5W	5600Lm	3600Lm

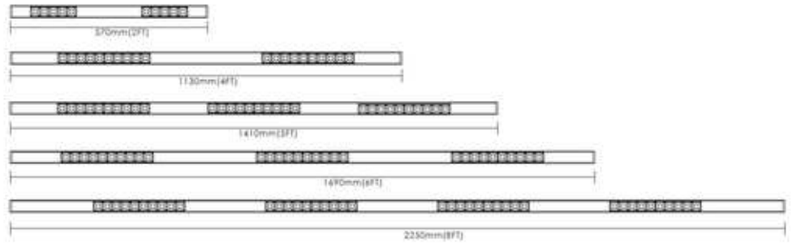


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

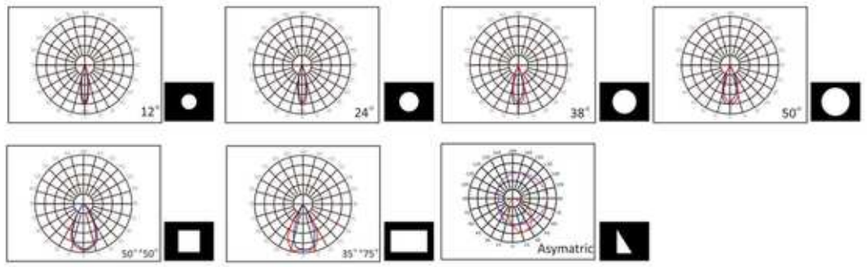

Accessories 配件




*For retail or wholesale, you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LS3580L1

LS3580C

OPAL DIFFUSER + OPTIC LENS



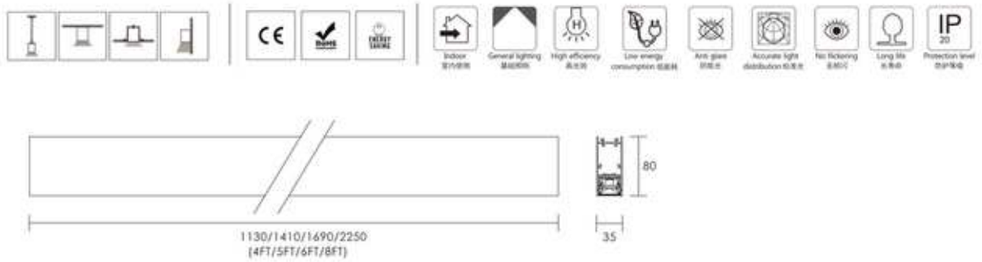


PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and optic lens,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电源选用无频闪，质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观，外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩与光学透镜组合，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3580C-1200	1130*35*80mm(4FT)	2*5W+18W	3300Lm	1980Lm
LS3580C-1500	1410*35*80mm(6FT)	4*5W+18W	4800Lm	2880Lm
LS3580C-1800	1690*35*80mm(8FT)	4*5W+27W	5250Lm	3150Lm
LS3580C-2400	2250*35*80mm(8FT)	4*5W+36W	6600Lm	3960Lm

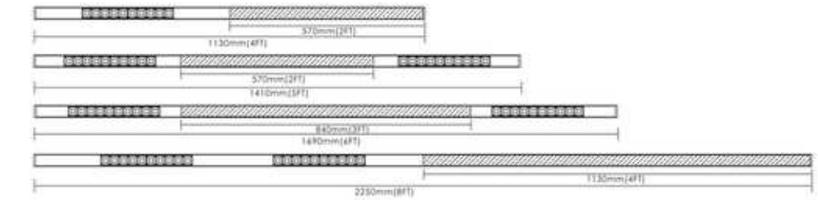


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

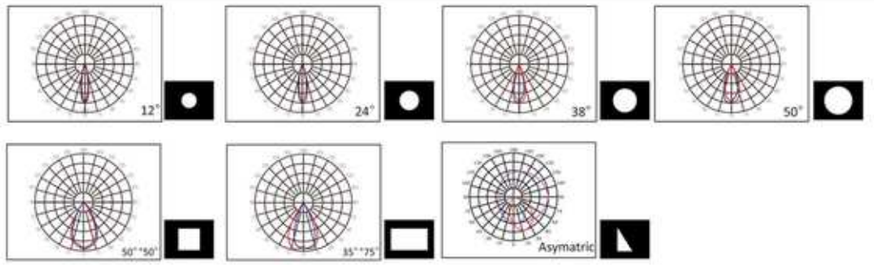

Accessories 配件



*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。


LS3580C

LS3580L2

OPTIC LENS SEAMLESS





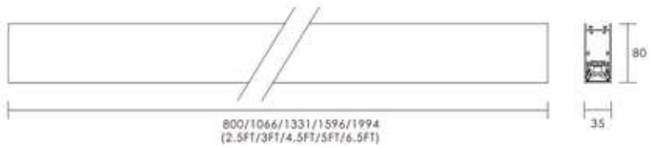


PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency optic lens,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电源选用无频闪、质保5年品牌驱动电源。配进口高亮度SMD光源。另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3580L2-800	800*35*80mm(2.5FT)	6*5W	4200Lm	2700Lm
LS3580L2-1000	1066*35*80mm(3.5FT)	8*5W	5600Lm	3600Lm
LS3580L2-1400	1331*35*80mm(4.5FT)	10*5W	7000Lm	4500Lm
LS3580L2-1600	1596*35*80mm(5FT)	12*5W	8400Lm	5400Lm
LS3580L2-2000	1994*35*80mm(6.5FT)	15*5W	10500Lm	6750Lm

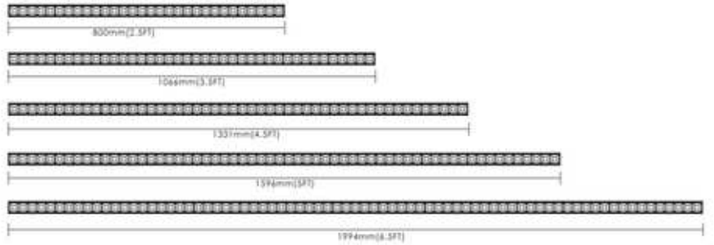


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ▫ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

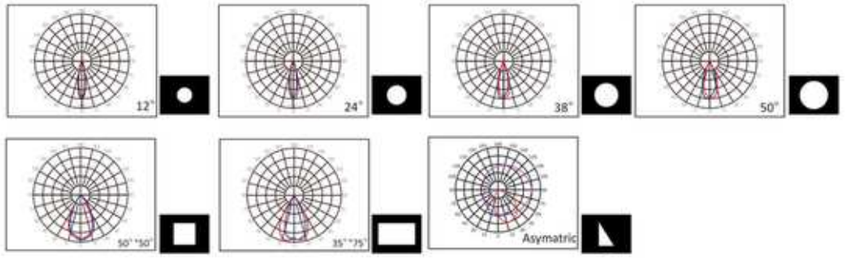


Accessories 配件



*For retail or wholesale, you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LS3580L2




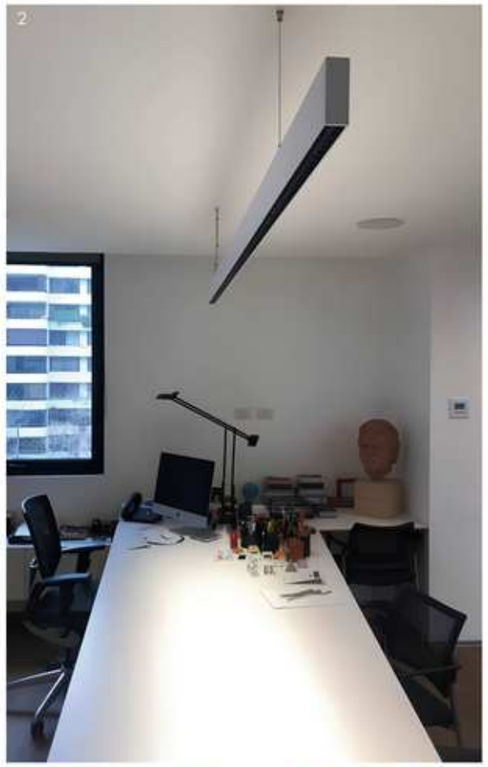





1,4: Scanavini Showroom | Architecture: AJS Arquitectos| Lighting Design: Campino Iluminación - Victoria Campino.
2. Gonzalo Mardones Offices| Lighting Design: Diseño de Luz. | 3. Research Center JRI| Architecture: De Toro & Sitja.

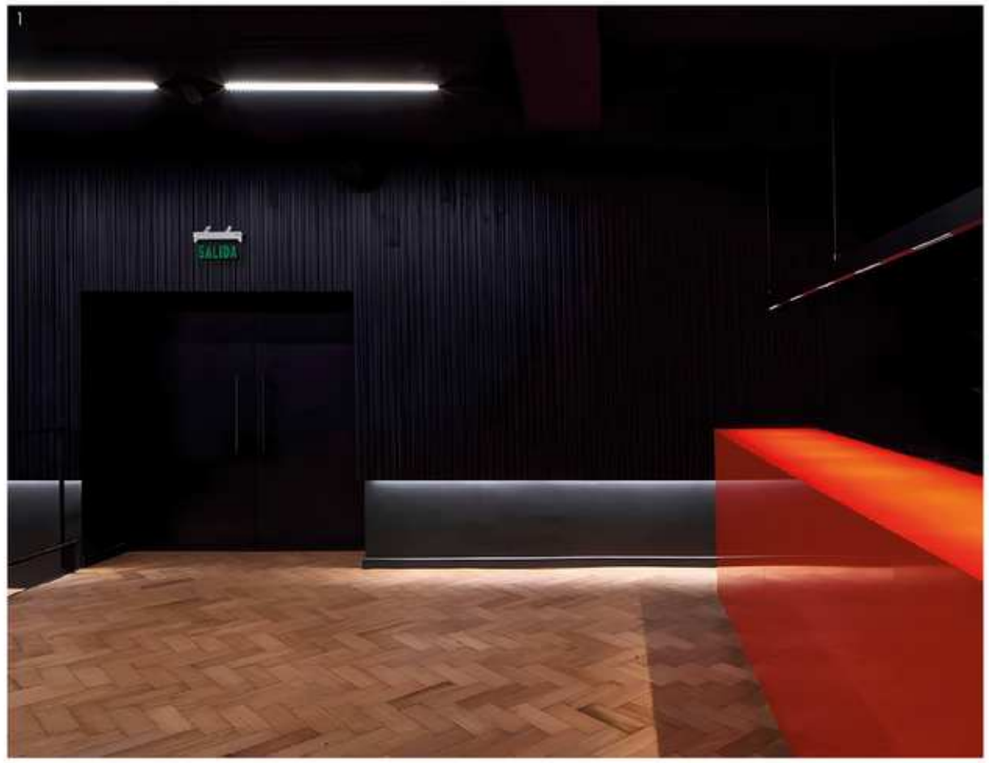




1. Teatro del Ángel| Architecture: Alberto Moletto | Lighting Design: Antonia Peón Vega / Matías López
2. DITEC - Jaguar y Land Rover Showroom. | Architecture: Rodrigo Errázuriz. | Lighting Design: LEVO Studio.

LS5080P

OPAL DIFFUSER



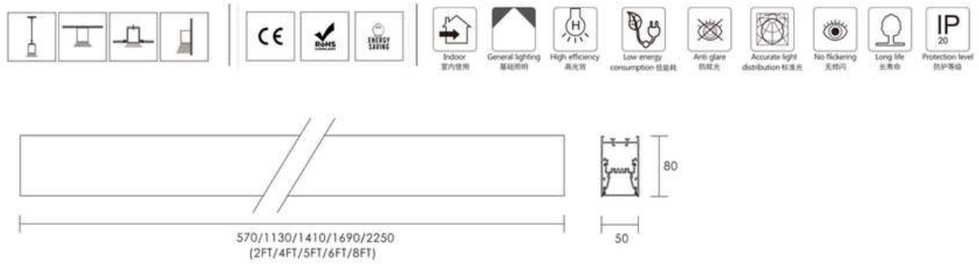

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条棱朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080P-600	570*50*80mm(2FT)	18W	3060Lm	1800Lm
LS5080P-1200	1130*50*80mm(4FT)	36W	6120Lm	3600Lm
LS5080P-1500	1410*50*80mm(5FT)	45W	7650Lm	4500Lm
LS5080P-1800	1690*50*80mm(6FT)	54W	9180Lm	5400Lm
LS5080P-2400	2250*50*80mm(8FT)	72W	12240Lm	7200Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080PU-600	570*50*80mm(2FT)	27W	4590Lm	2700Lm
LS5080PU-1200	1130*50*80mm(4FT)	54W	9180Lm	5400Lm
LS5080PU-1500	1410*50*80mm(5FT)	63W	10710Lm	6300Lm
LS5080PU-1800	1690*50*80mm(6FT)	81W	13770Lm	8100Lm
LS5080PU-2400	2250*50*80mm(8FT)	108W	18360Lm	10800Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ▫ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor


LIGHT DISTRIBUTION CURVE 光强分布曲线

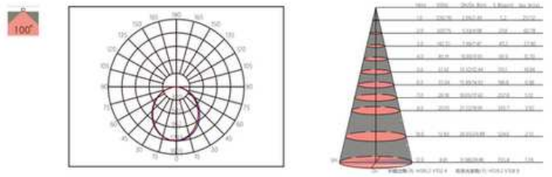


CONTINUOUS 连接件

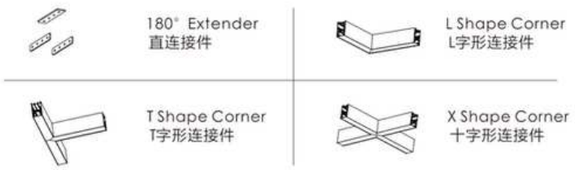

DETAIL 细节



Accessories 配件

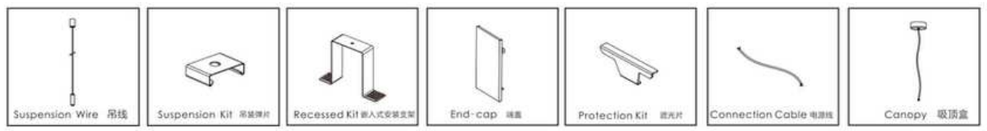

*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LS5080P

CROMATIX®
Lighting Intelligence




UGR<19


眩光值小于19

LS5080PM

PRISMATIC DIFFUSER

棱晶罩

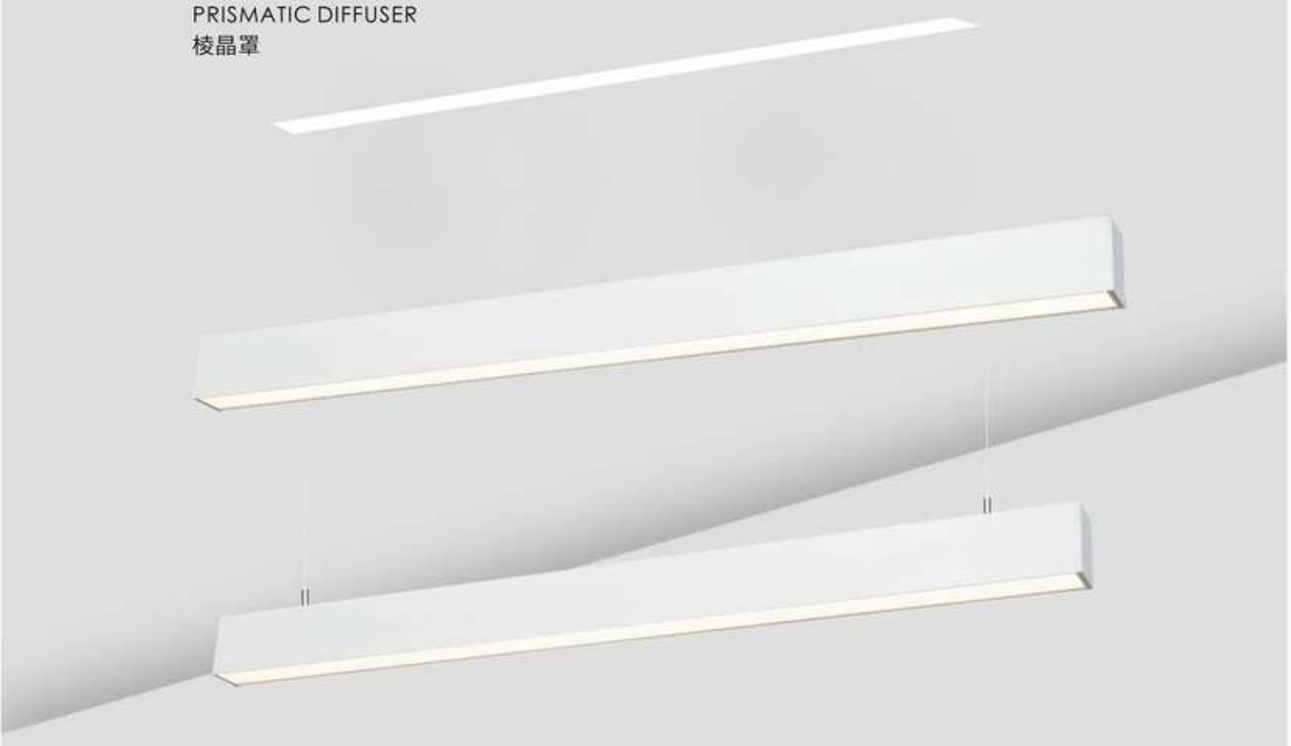

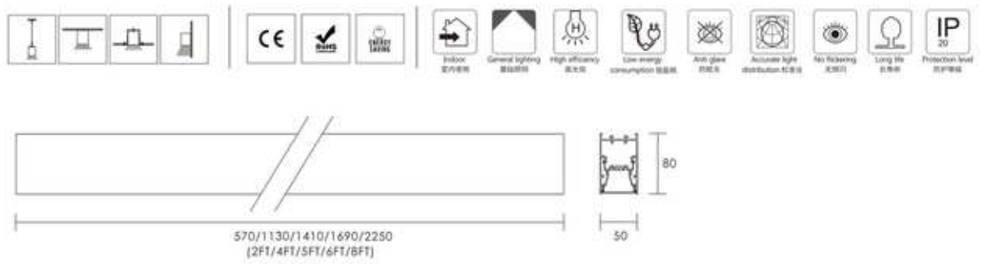

PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小，减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观，外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防眩效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080PM-600	570*50*80mm(2FT)	18W	3060Lm	1800Lm
LS5080PM-1200	1130*50*80mm(4FT)	36W	6120Lm	3600Lm
LS5080PM-1500	1410*50*80mm(5FT)	45W	7650Lm	4500Lm
LS5080PM-1800	1690*50*80mm(6FT)	54W	9180Lm	5400Lm
LS5080PM-2400	2250*50*80mm(8FT)	72W	12240Lm	7200Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080PMU-600	570*50*80mm(2FT)	27W	4590Lm	2700Lm
LS5080PMU-1200	1130*50*80mm(4FT)	54W	9180Lm	5400Lm
LS5080PMU-1500	1410*50*80mm(5FT)	63W	10710Lm	6300Lm
LS5080PMU-1800	1690*50*80mm(6FT)	81W	13770Lm	8100Lm
LS5080PMU-2400	2250*50*80mm(8FT)	108W	18360Lm	10800Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

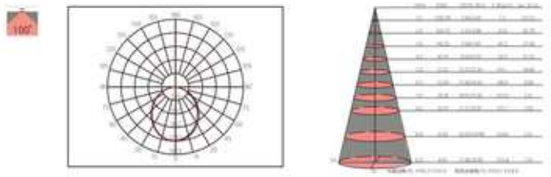

CONTINUOUS 连接件



180° Extender
直连接件


L Shape Corner
L字形连接件



T Shape Corner
T字形连接件


X Shape Corner
十字形连接件

DETAIL 细节



Accessories 配件



*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LS5080PM




Coordinador Eléctrico Nacional | Architecture: Jorge Iglesis. | Interior Design: OArquitectos.

LS5080L1

OPTIC LENS



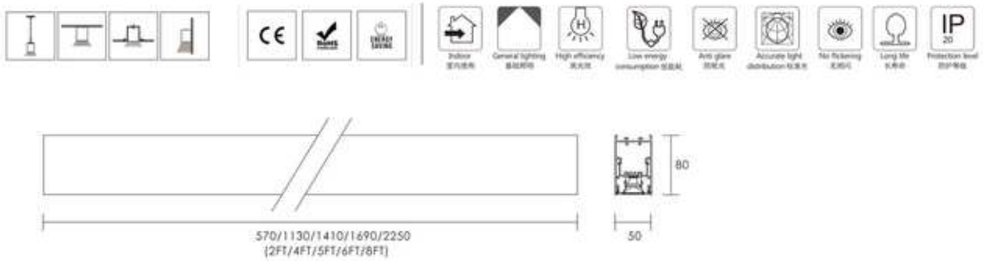


PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电源选用无频闪，质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条棱角美观。外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080L1-600	570*50*80mm(2FT)	2*5W	1400Lm	900Lm
LS5080L1-1200	1130*50*80mm(4FT)	4*5W	2800Lm	1800Lm
LS5080L1-1500	1410*50*80mm(5FT)	6*5W	4200Lm	2700Lm
LS5080L1-1800	1690*50*80mm(6FT)	6*5W	4200Lm	2700Lm
LS5080L1-2400	2250*50*80mm(8FT)	8*5W	5600Lm	3600Lm

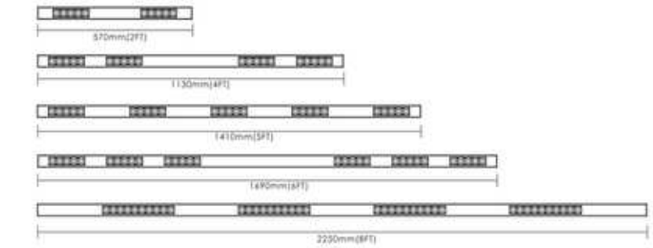


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor


DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

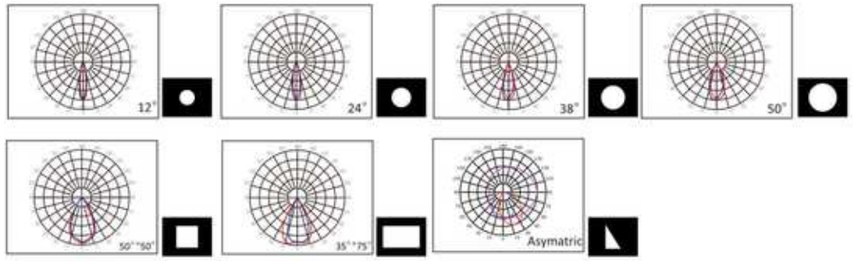

Accessories 配件

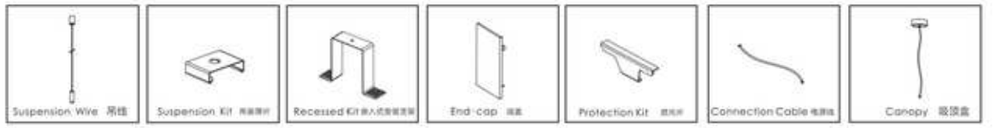


*For retail or wholesale, you can buy accessories seprately.零售或批发，配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LS5080L1





1. Car Storage | Architecture and Lighting Design: Urban Chic-Marcelo Varetto
2. Scanavini Showroom | Architecture: AJS Arquitectos | Lighting Design: Campino Iluminación - Victoria Campino

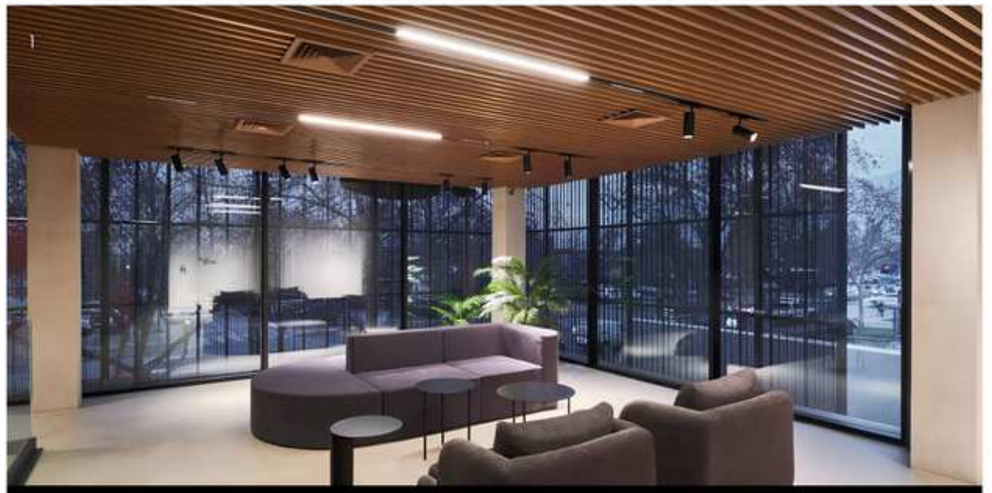






1. Scanavini Showroom | Architecture: AJS Arquitectos | Lighting Design: Campino Iluminación - Victoria Campino
2-3. Car Storage | Architecture and Lighting Design: Urban Chic-Marcelo Varetto

LS5080C

OPAL DIFFUSER+OPTIC LENS



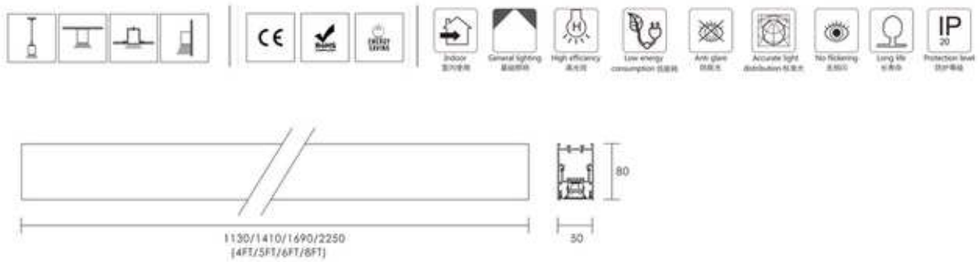


PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光，DALI调光，调色温驱动电源。
寿命长达5万小时，光衰小，减少后期维护费用。
无螺丝不漏光端盖，灯具线条棱角美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩与光学透镜组合，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080C-1200	1130*50*80mm(4FT)	2*5W+12W	3300Lm	1980Lm
LS5080C-1500	1410*50*80mm(5FT)	4*5W+12W	4800Lm	2880Lm
LS5080C-1800	1690*50*80mm(6FT)	4*5W+15W	5250Lm	3150Lm
LS5080C-2400	2250*50*80mm(8FT)	4*5W+24W	6600Lm	3960Lm

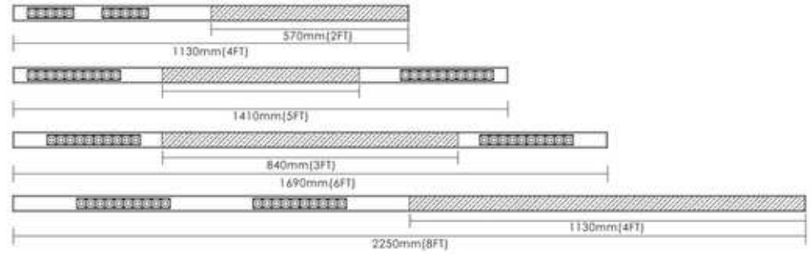


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor


DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

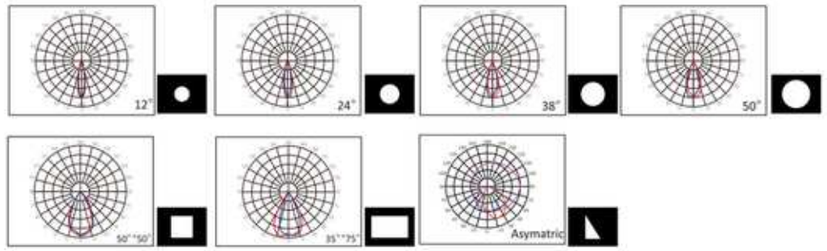

Accessories 配件



*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。


LS5080C

LS5080T

OPAL DIFFUSER+OPTIC LENS+Track





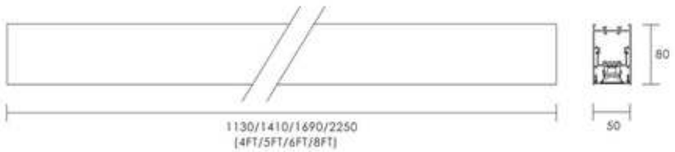


PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip.
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps.No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小，减少后期维护费用。
无螺丝不漏光端盖，灯具线条棱角美观，外形尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩与光学透镜组合，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080T-2250	2250*50*80mm(8FT)	24W+N*Spot	4000Lm+Spot	2400Lm+Spot
LS5080T-2250	2250*50*80mm(8FT)	4*5W+N*Spot	3000Lm+Spot	1800Lm+Spot
LS5080T-2250	2250*50*80mm(8FT)	24W+2*5W+N*Spot	5250Lm+Spot	3400Lm+Spot

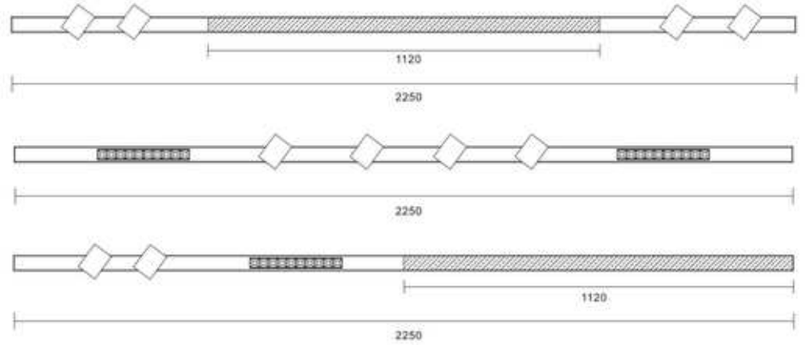


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

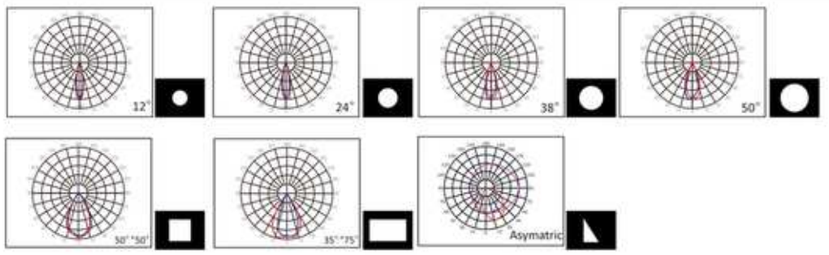

Accessories 配件



*For retail or wholesale, you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LS5080T



Multicompany Showroom | Architecture: OArquitectos.




Compass Group Offices | Architecture: Del Toro Arquitectos | Lighting Design: CONTRALUZ.

LS6588P

OPAL DIFFUSER





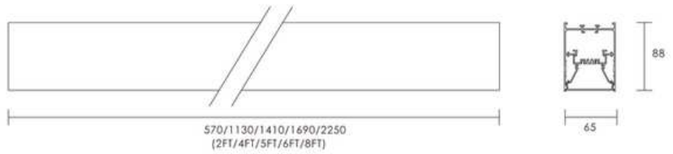

PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝压铸铝端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6588P-600	570*65*88mm(2FT)	18W	3060Lm	1800Lm
LS6588P-1200	1130*65*88mm(4FT)	36W	6120Lm	3600Lm
LS6588P-1500	1410*65*88mm(5FT)	45W	7650Lm	4500Lm
LS6588P-1800	1690*65*88mm(6FT)	54W	9180Lm	5400Lm
LS6588P-2400	2250*65*88mm(8FT)	72W	12240Lm	7200Lm





Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6588PU-600	570*65*88mm(2FT)	27W	4590Lm	2700Lm
LS6588PU-1200	1130*65*88mm(4FT)	45W	7650Lm	4500Lm
LS6588PU-1500	1410*65*88mm(5FT)	67W	11390Lm	6700Lm
LS6588PU-1800	1690*65*88mm(6FT)	81W	13770Lm	8100Lm
LS6588PU-2400	2250*65*88mm(8FT)	108W	18360Lm	10800Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ▫ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线





CONTINUOUS 连接件



180° Extender 直连接件



L Shape Corner L字形连接件




T Shape Corner T字形连接件




X Shape Corner 十字形连接件

DETAIL 细节



Accessories 配件

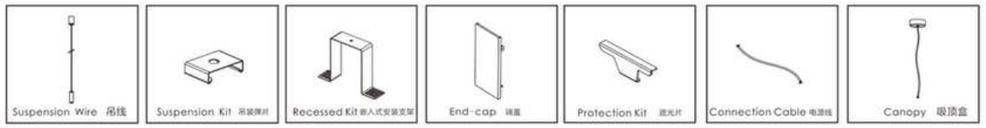

*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。


LS6588P

LS6588PM

PRISMATIC DIFFUSER





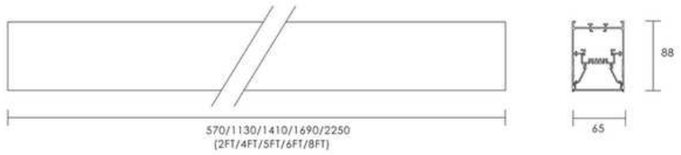

PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip,
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝压铸铝端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6588PM-600	570*65*88mm(2FT)	18W	3060Lm	1800Lm
LS6588PM-1200	1130*65*88mm(4FT)	36W	6120Lm	3600Lm
LS6588PM-1500	1410*65*88mm(5FT)	45W	7650Lm	4500Lm
LS6588PM-1800	1690*65*88mm(6FT)	54W	9180Lm	5400Lm
LS6588PM-2400	2250*65*88mm(8FT)	72W	12240Lm	7200Lm


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6588PMU-600	570*65*88mm(2FT)	27W	4590Lm	2700Lm
LS6588PMU-1200	1130*65*88mm(4FT)	45W	7650Lm	4500Lm
LS6588PMU-1500	1410*65*88mm(5FT)	67W	11390Lm	6700Lm
LS6588PMU-1800	1690*65*88mm(6FT)	81W	13770Lm	8100Lm
LS6588PMU-2400	2250*65*88mm(8FT)	108W	18360Lm	10800Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线





CONTINUOUS 连接件



180° Extender
直连接件



L Shape Corner
L字形连接件




T Shape Corner
T字形连接件




X Shape Corner
十字形连接件

DETAIL 细节



Accessories 配件



*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。


LS6588PM

LS75100P

OPAL DIFFUSER





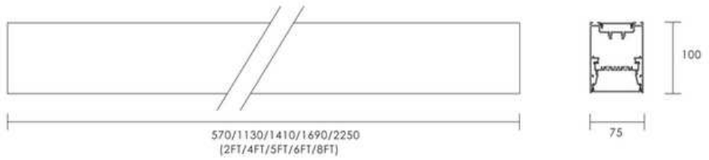

PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝压铸铝端盖，灯具线条梯朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS75100P-600	570*75*100mm(2FT)	18W	3060Lm	1800Lm
LS75100P-1200	1130*75*100mm(4FT)	36W	6120Lm	3600Lm
LS75100P-1500	1410*75*100mm(5FT)	45W	7650Lm	4500Lm
LS75100P-1800	1690*75*100mm(6FT)	54W	9180Lm	5400Lm
LS75100P-2400	2250*75*100mm(8FT)	72W	12240Lm	7200Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS75100PU-600	570*75*100mm(2FT)	27W	4590Lm	2700Lm
LS75100PU-1200	1130*75*100mm(4FT)	45W	7650Lm	4500Lm
LS75100PU-1500	1410*75*100mm(5FT)	67W	11390Lm	6700Lm
LS75100PU-1800	1690*75*100mm(6FT)	81W	13770Lm	8100Lm
LS75100PU-2400	2250*75*100mm(8FT)	108W	18360Lm	10800Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

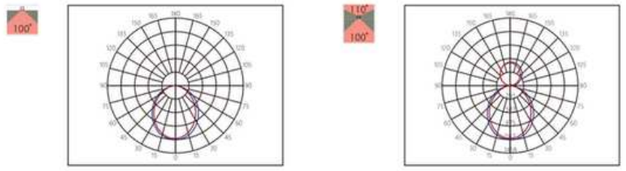

CONTINUOUS 连接件




180° Extender 直连接件

L Shape Corner L字形连接件


T Shape Corner T字形连接件

X Shape Corner 十字形连接件

DETAIL 细节



Accessories 配件

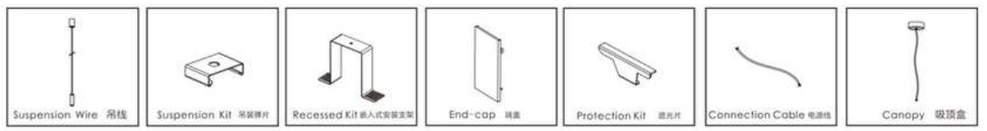


*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。


LS75100P

LS100110P

OPAL DIFFUSER



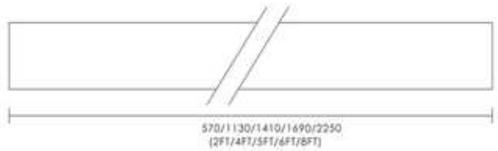



PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip.
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电源选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条梗圆美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS100110P-600	570*100*110mm(2FT)	18W	3060Lm	1800Lm
LS100110P-1200	1130*100*110mm(4FT)	36W	6120Lm	3600Lm
LS100110P-1500	1410*100*110mm(5FT)	45W	7650Lm	4500Lm
LS100110P-1800	1690*100*110mm(6FT)	54W	9180Lm	5400Lm
LS100110P-2400	2250*100*110mm(8FT)	72W	12240Lm	7200Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS100110PU-600	570*100*110mm(2FT)	27W	4590Lm	2700Lm
LS100110PU-1200	1130*100*110mm(4FT)	45W	7650Lm	4500Lm
LS100110PU-1500	1410*100*110mm(5FT)	67W	11390Lm	6700Lm
LS100110PU-1800	1690*100*110mm(6FT)	81W	13770Lm	8100Lm
LS100110PU-2400	2250*100*110mm(8FT)	108W	18360Lm	10800Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

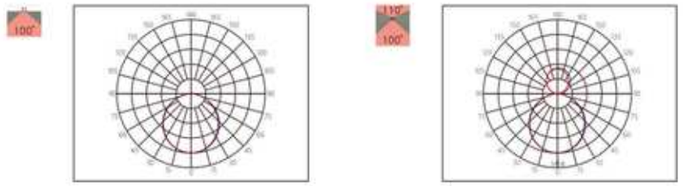

CONTINUOUS 连接件




180° Extender
直连接件

L Shape Corner
L字形连接件


T Shape Corner
T字形连接件

X Shape Corner
十字形连接件

DETAIL 细节



Accessories 配件

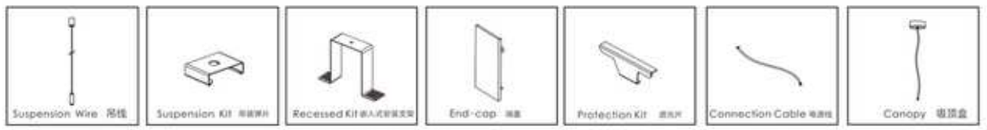

*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LS100110P









1. IGS Group Offices | Architecture: Elton y Leniz Arquitectos | Lighting Design: LEVO Studio | 2. Eriasa Offices | Architecture: Nicolas Arancibia | Lighting Design: CONTRALUZ
3. Decathlon | Architecture: Tiso Arquitectos. | 4. MK Offices | Architecture and Lighting Design: OArquitectos.







1. Indura Offices | Architecture: AJS Arquitectos | Lighting Design: Diseño de Luz.
2. Studio PAS Academy | Architecture and Design: Sientecinco. | 3. Onnet Fibra | Architecture and Construction: CASBRO.

XLINE SERIES

RECESSED

Designed for seamless integration into architecture, XLINE Recessed brings maximum versatility to linear lighting. Available with an opal diffuser, optical modules, or a combination of both, it adapts to the needs of residential, commercial, and educational spaces, providing lighting that is both functional and visually refined.

Its flexibility allows the use of multiple connectors to create continuous recessed compositions, opening new possibilities for creative design within ceilings and walls. To meet the demands of different projects, XLINE Recessed is available in various profiles — from slim formats to more robust sections — ensuring the perfect balance between discretion and performance.

More than lighting, XLINE Recessed is a tool to enhance architecture with precision, elegance, and creative freedom.







1.BNP Paribas Cardif Offices | Architecture and Lighting Design: Grupo E.

LR4737P

OPAL DIFFUSER

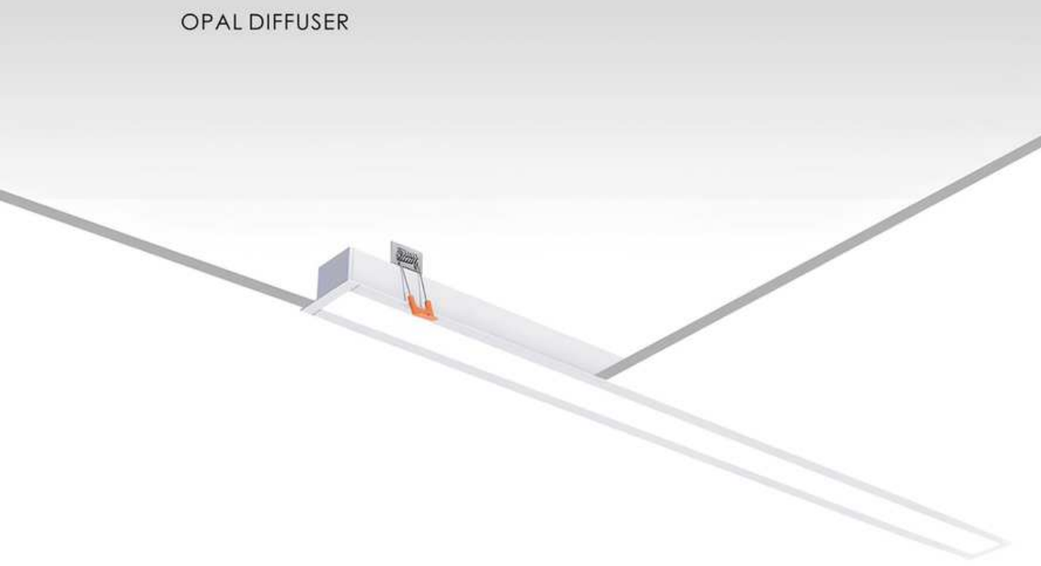

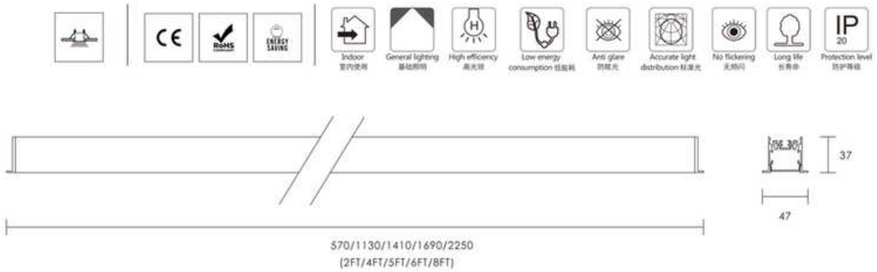

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps.No screw to be appeared.No light leak.
- High grade aluminum.high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737P-600	570*47*37mm(2FT)	18W	2040Lm	1620Lm
LR4737P-1200	1130*47*37mm(4FT)	36W	4080Lm	3240Lm
LR4737P-1500	1410*47*37mm(5FT)	45W	6120Lm	3600Lm
LR4737P-1800	1690*47*37mm(6FT)	54W	7140Lm	4320Lm
LR4737P-2400	2250*47*37mm(8FT)	72W	8080Lm	6480Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor


LIGHT DISTRIBUTION CURVE 光强分布曲线

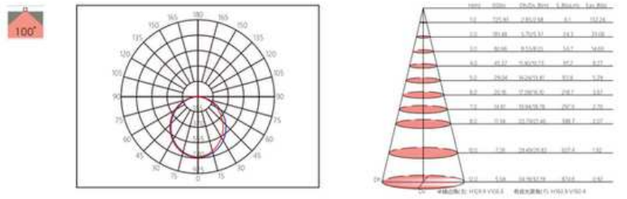


CONTINUOUS 连接件

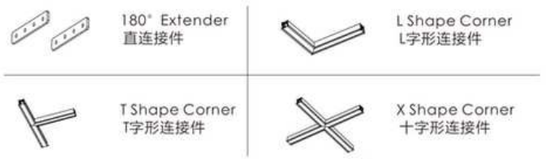

DETAIL 细节



Accessories 配件



*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LR4737P


LR4737PM

PRISMATIC DIFFUSER
UGE<19

核晶防胶罩
胶光值<19





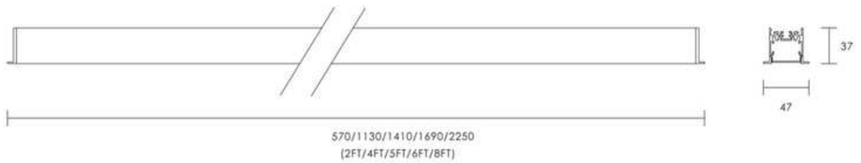

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条棱朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737PM-600	570*47*37mm(2FT)	18W	2040Lm	1260Lm
LR4737PM-1200	1130*47*37mm(4FT)	36W	4080Lm	2520Lm
LR4737PM-1500	1410*47*37mm(5FT)	45W	6120Lm	3150Lm
LR4737PM-1800	1690*47*37mm(6FT)	54W	7140Lm	3780Lm
LR4737PM-2400	2250*47*37mm(8FT)	72W	8080Lm	5040Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black □ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

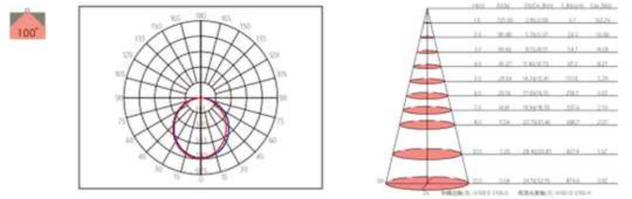

CONTINUOUS 连接件



180° Extender
直连接件


L Shape Corner
L字形连接件


T Shape Corner
T字形连接件


X Shape Corner
十字形连接件

DETAIL 细节



Accessories 配件


Mounting Spring 弹簧


End-cap 端盖


Protection Kit 遮光片

*For retail or wholesale,you can buy accessories seprately,零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LR4737PM





1, Magasich Office | Architecture: Francisco Vivanco | Lighting Design: Diseño de Luz.
2. BCI Pagos Offices | Architecture and Lighting Design: Collective Architecture.








1, Saint George School's Classroom | Architecture: Elton Deves Arquitectos | Lighting Design: Docevolts.
2. BNP Paribas Cardif Offices | Architecture and Lighting Design: Grupo E | 3. Car Storage | Architecture and Lighting Design: Urban Chic-Marcelo Varetto.

LR4737L1

OPTIC LENS





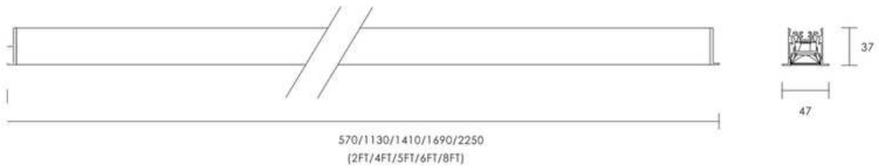


PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip.
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观，外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737L1-600	570*47*37mm(2FT)	2*5W	1400Lm	900Lm
LR4737L1-1200	1130*47*37mm(4FT)	4*5W	2800Lm	1800Lm
LR4737L1-1500	1410*47*37mm(5FT)	6*5W	4200Lm	2700Lm
LR4737L1-1800	1690*47*37mm(6FT)	6*5W	4200Lm	2700Lm
LR4737L1-2400	2250*47*37mm(8FT)	8*5W	5600Lm	3600Lm

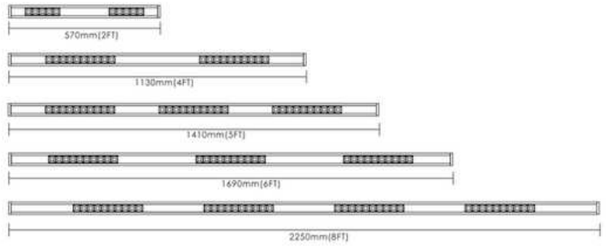


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor


DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

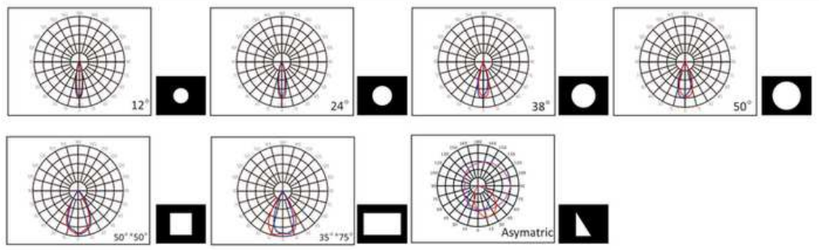

Accessories 配件





*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LR4737L1

LR4737L2

OPTIC LENS SEAMLESS

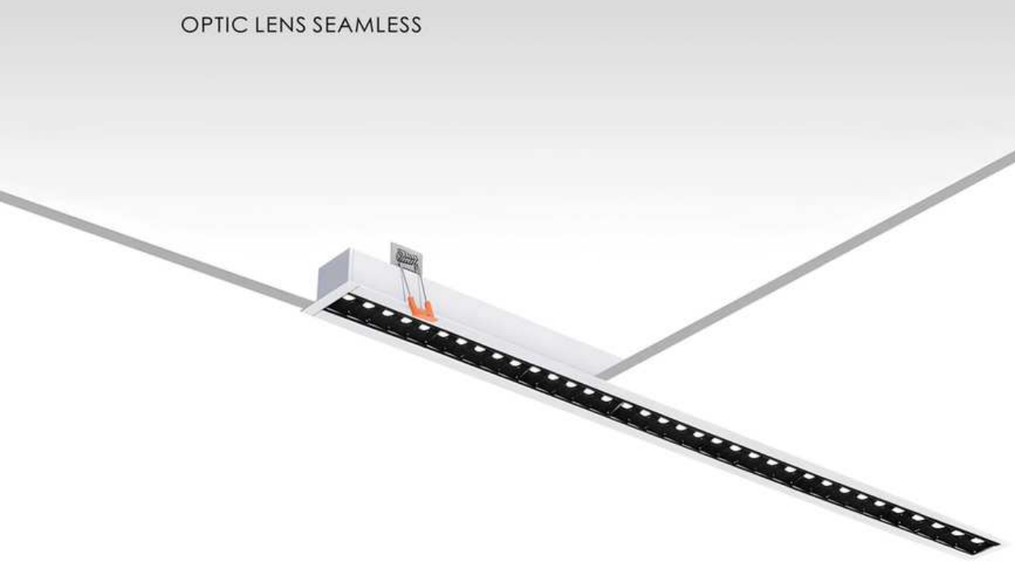

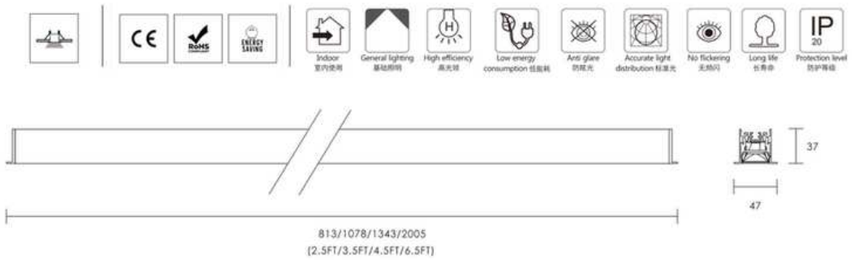


PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency optic lens,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观，外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737L2-800	813*47*37mm(2.5FT)	6*5W	4200Lm	2700Lm
LR4737L2-1000	1078*47*37mm(3.5FT)	8*5W	5600Lm	3600Lm
LR4737L2-1400	1343*47*37mm(4.5FT)	10*5W	6000Lm	4500Lm
LR4737L2-2000	2005*47*37mm(6.5FT)	15*5W	10500Lm	6750Lm

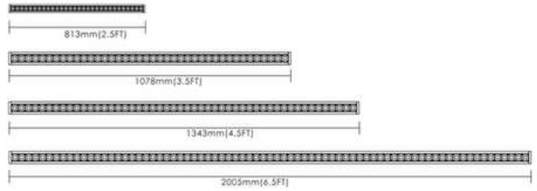


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor


DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

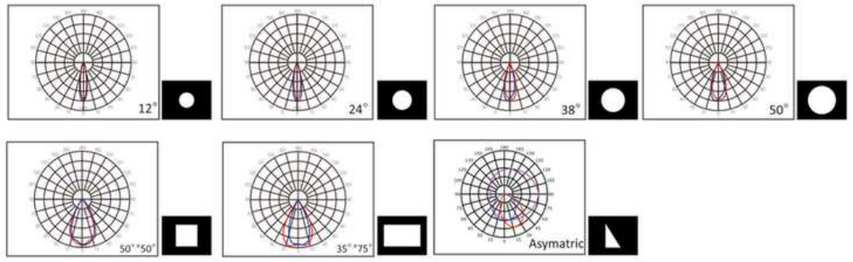

Accessories 配件





*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LR4737L2

LR4737C

OPTIC LENS+OPAL DIFFUSER

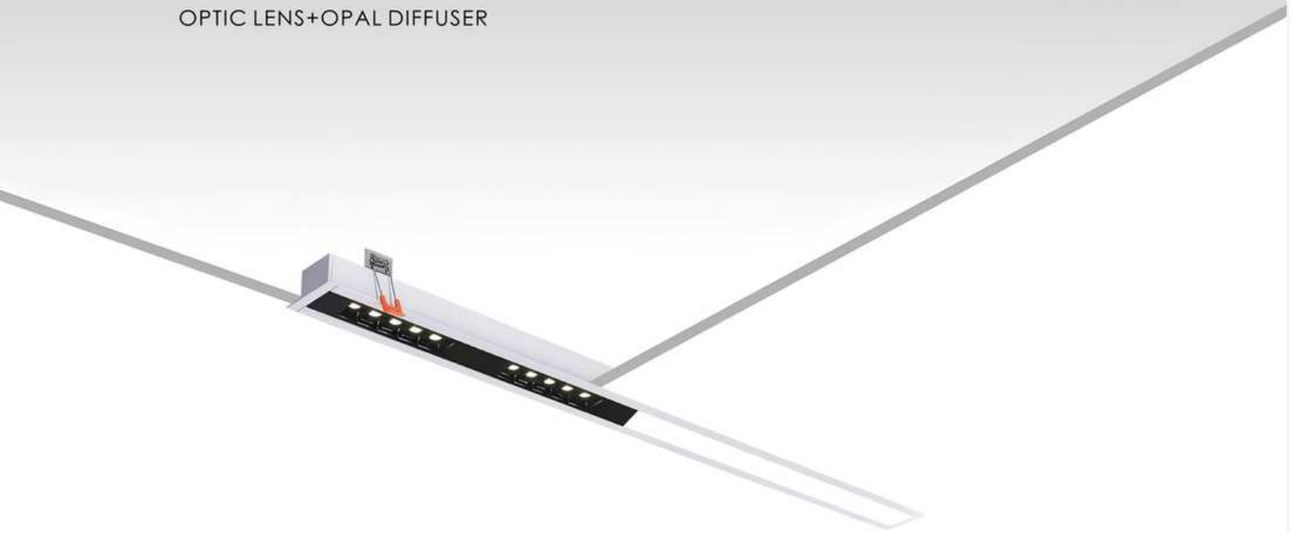

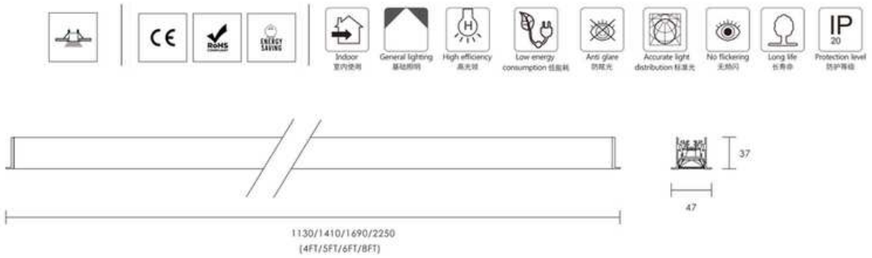


PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and optic lens,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观，外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩与光学透镜组合，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737C-1200	1130*47*37mm(4FT)	2*5W+12W	3080Lm	1980Lm
LR4737C-1500	1410*47*37mm(5FT)	4*5W+12W	4480Lm	2880Lm
LR4737C-1800	1690*47*37mm(6FT)	4*5W+15W	4900Lm	3150Lm
LR4737C-2400	2250*47*37mm(8FT)	4*5W+24W	6160Lm	3960Lm

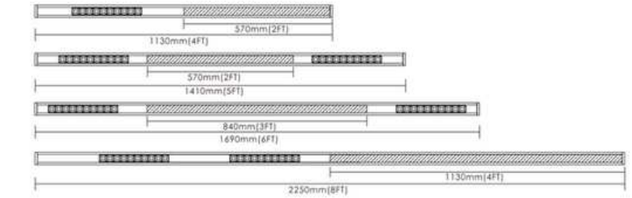


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor


DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

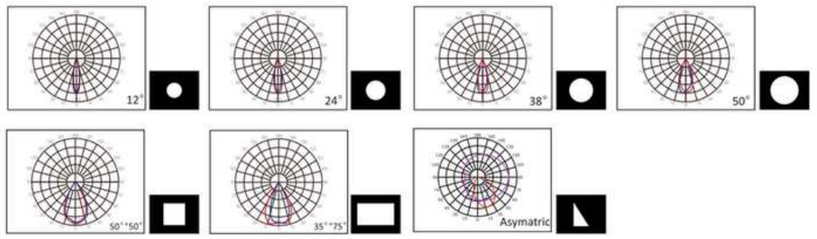

Accessories 配件




*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。


LR4737C

LR6537P

OPAL DIFFUSER

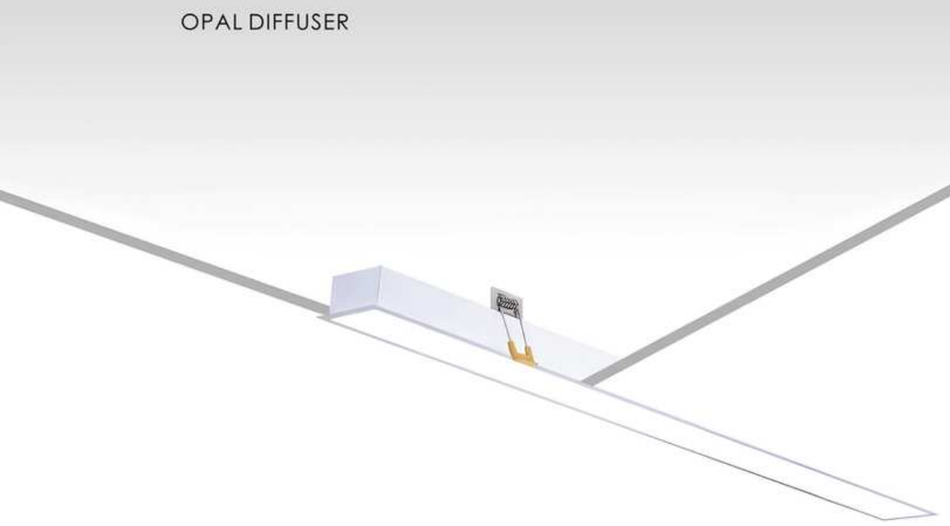



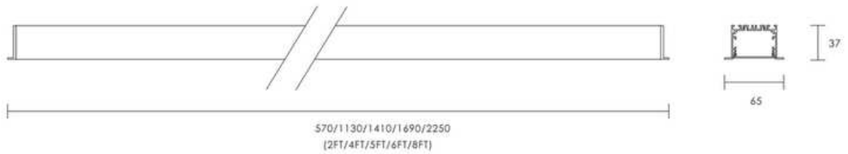

PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观，外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR6537P-600	570*65*37mm(2FT)	12W	2040Lm	1200Lm
LR6537P-1200	1130*65*37mm(4FT)	24W	4080Lm	2400Lm
LR6537P-1500	1410*65*37mm(5FT)	36W	6120Lm	3600Lm
LR6537P-1800	1690*65*37mm(6FT)	42W	7140Lm	4200Lm
LR6537P-2400	2250*65*37mm(8FT)	48W	8160Lm	4800Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线







CONTINUOUS 连接件



180° Extender
直连接件



L Shape Corner
L字形连接件




T Shape Corner
T字形连接件




X Shape Corner
十字形连接件

DETAIL 细节



Accessories 配件




*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LR6537P


LR6537PM

PRISMATIC DIFFUSER
UGE<19

核晶防胶罩
胶光值<19

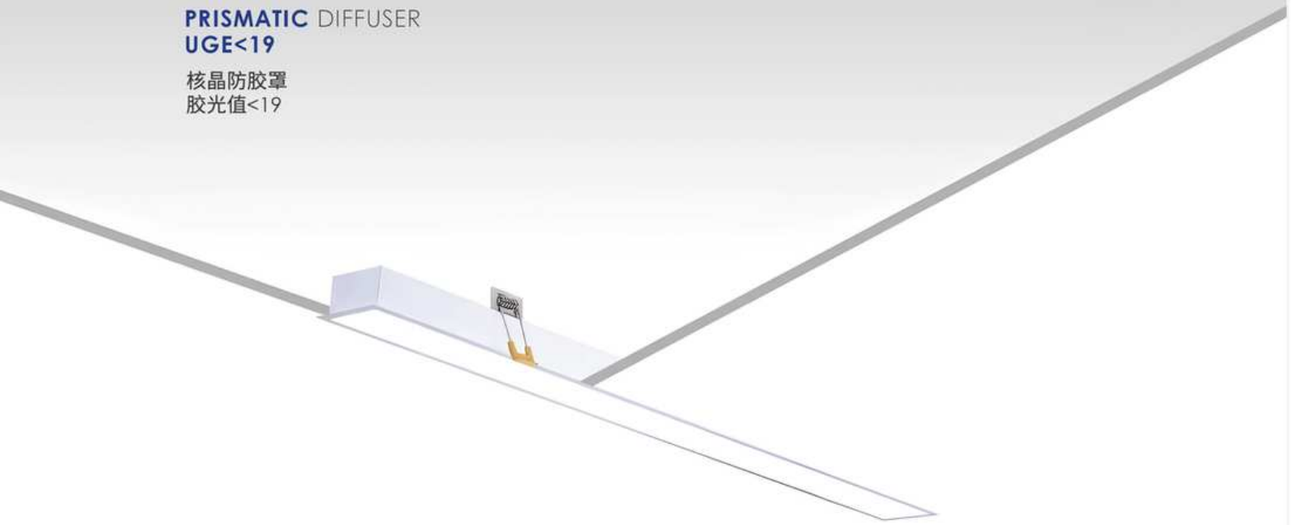



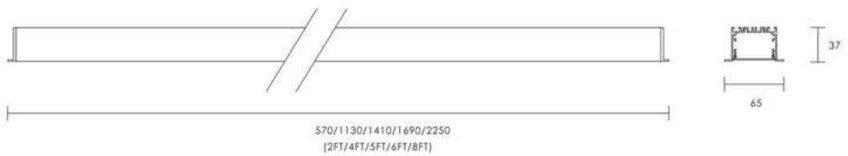

PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip,
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观。外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR6537PM-600	570*65*37mm(2FT)	18W	2040Lm	1260Lm
LR6537PM-1200	1130*65*37mm(4FT)	36W	4080Lm	2520Lm
LR6537PM-1500	1410*65*37mm(5FT)	45W	6120Lm	3150Lm
LR6537PM-1800	1690*65*37mm(6FT)	54W	7140Lm	3780Lm
LR6537PM-2400	2250*65*37mm(8FT)	72W	8160Lm	5040Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

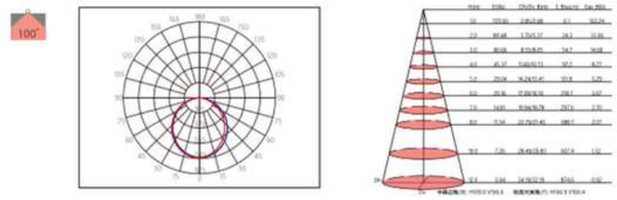

CONTINUOUS 连接件



180° Extender
直连接件


L Shape Corner
L字形连接件


T Shape Corner
T字形连接件



X Shape Corner
十字形连接件

DETAIL 细节



Accessories 配件


Mounting Spring 弹簧


End-cap 堵盖


Protection Kit 防光片


*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LR6537PM

LR9037P

OPAL DIFFUSER



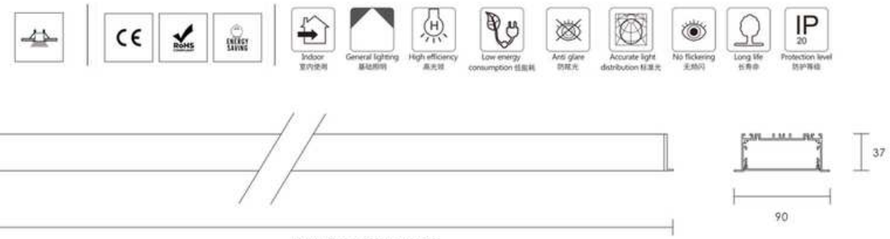

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip.
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条棱朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR9037P-600	570*90*37mm(2FT)	18W	3060Lm	1800Lm
LR9037P-1200	1130*90*37mm(4FT)	36W	6120Lm	3600Lm
LR9037P-1500	1410*90*37mm(5FT)	45W	7650Lm	4500Lm
LR9037P-1800	1690*90*37mm(6FT)	54W	9180Lm	5400Lm
LR9037P-2400	2250*90*37mm(8FT)	72W	12240Lm	7200Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

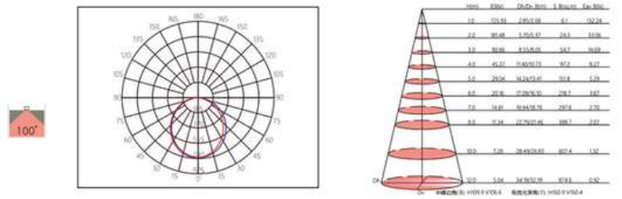


CONTINUOUS 连接件



180° Extender
直连接件


L Shape Corner
L字形连接件


T Shape Corner
T字形连接件


X Shape Corner
十字形连接件

DETAIL 细节



Accessories 配件


Mounting Spring 弹簧


End-cap 端盖


Protection Kit 遮光片


*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LR9037P


LR9037PM

PRISMATIC DIFFUSER
UGE<19

核晶防胶罩
胶光值<19

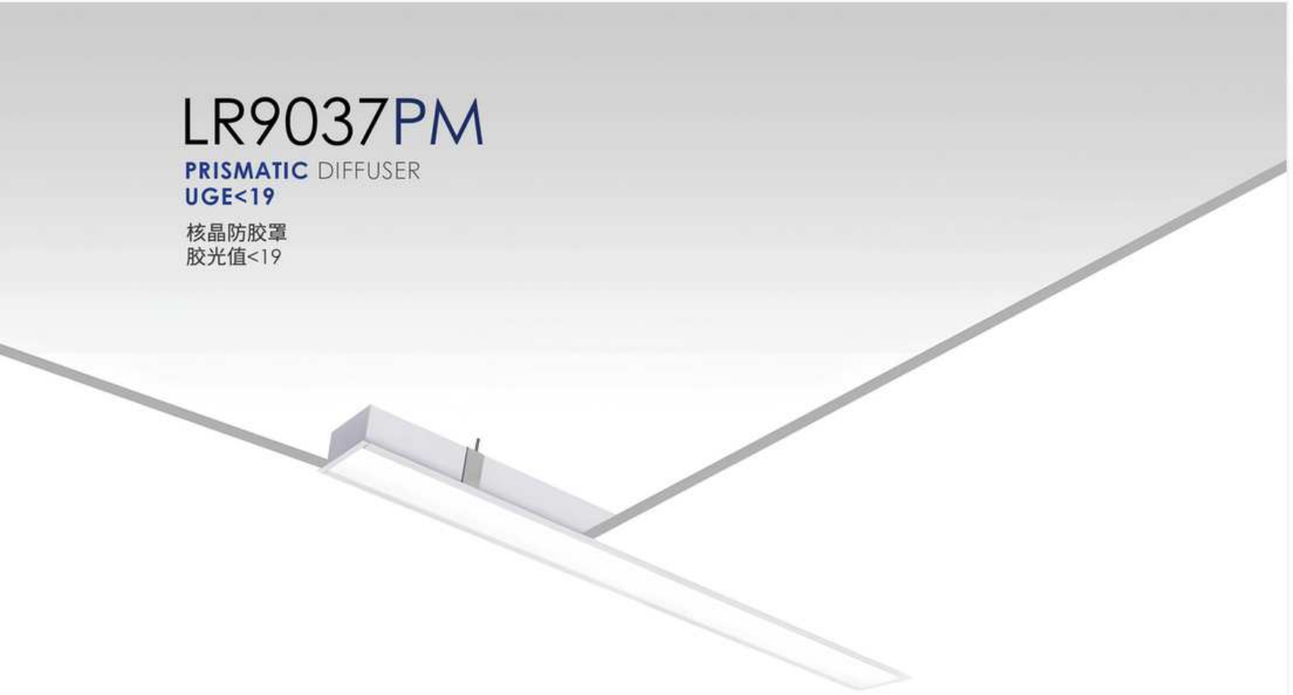





570/1130/1410/1690/2250
(2FT/4FT/5FT/6FT/8FT)

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip.
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条棱朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR9037PM-600	570*90*37mm(2FT)	18W	3060Lm	1800Lm
LR9037PM-1200	1130*90*37mm(4FT)	36W	6120Lm	3600Lm
LR9037PM-1500	1410*90*37mm(5FT)	45W	7650Lm	4500Lm
LR9037PM-1800	1690*90*37mm(6FT)	54W	9180Lm	5400Lm
LR9037PM-2400	2250*90*37mm(8FT)	72W	12240Lm	7200Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

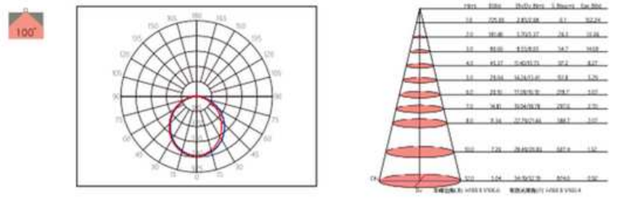

CONTINUOUS 连接件



180° Extender
直连接件


L Shape Corner
L字形连接件



T Shape Corner
T字形连接件


X Shape Corner
十字形连接件

DETAIL 细节



Accessories 配件


Mounting Spring 弹簧


End-cap 端盖


Protection Kit 保护片

*For retail or wholesale,you can buy accessories seprately.零售或批发，配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目，请告知你的需求，我们会推荐合适配件。

LR9037PM






1. RedBull Offices | Architecture: Mussa Arquitectos.





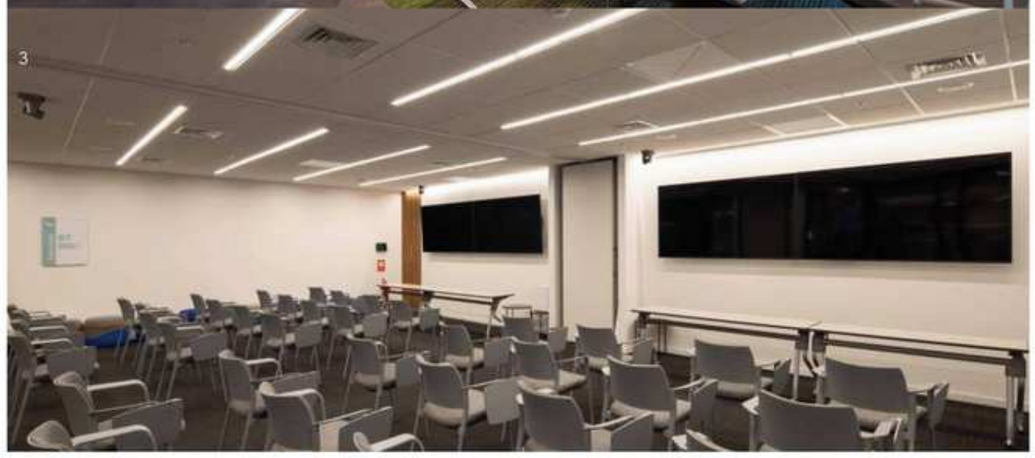

1. BCI Pagos Offices | Architecture and Lighting Design: Collective Architecture. | 2. Indura Offices | Architecture: Armas Elton Arquitectos. | Lighting Design : Diseño de Luz. 3. Novo Nordisk | Architecture: FMZ Arquitectura | Lighting Design: Docevolts-Francisca Nicoletti








1. Forus Offices | Architecture: Armas Elton Arquitectos | Lighting Design: Diseño de Luz.
2. Novo Nordisk | Architecture: FMZ Arquitectura. | Lighting Design: Docevolts-Francisca Nicoletti.
3. Indura Offices | Architecture: Armas Elton Arquitectos | Lighting Design: Diseño de Luz.





1. Murex Offices | Architecture and Lighting Design: Collective Architecture. | 2. IGS Group Offices | Architecture: Elton y Leniz Arquitectos | Lighting Design: LEVO Studio.

XTUBE

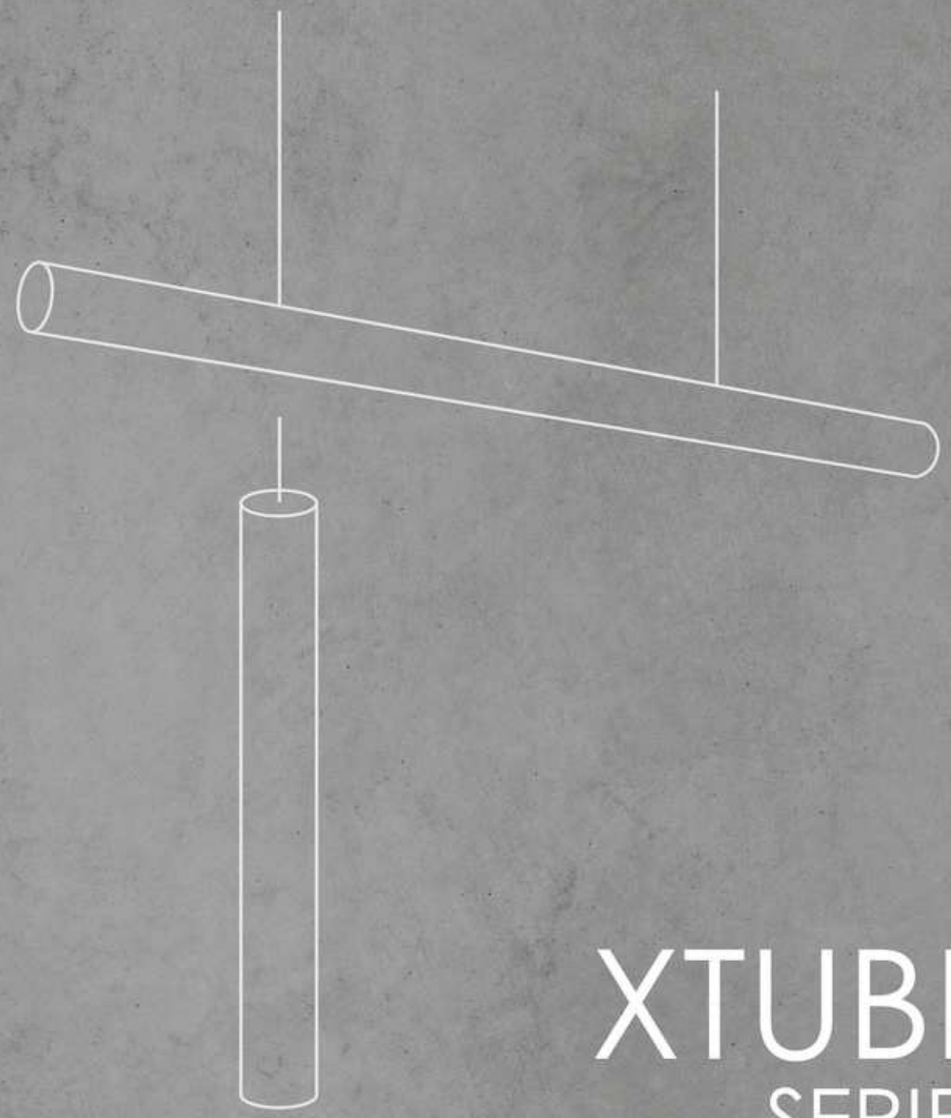

XTUBE
SERIES

HORIZONTAL SUSPENSION
VERTICAL SUSPENSION

XTUBE SERIES

HORIZONTAL SUSPENSION | VERTICAL SUSPENSION

Designed as a tubular LED profile, XTUBE creates an impressive 360° or 270° lighting effect, delivering both functionality and unique visual impact.


Its versatile design allows horizontal or vertical suspension, adapting seamlessly to different architectural concepts.

Available in various sizes, it offers flexible solutions for any type of project, from technical applications to bold and out-of-the-box designs.






MUREX Offices | Architecture and Lighting Design: Collective Architecture.

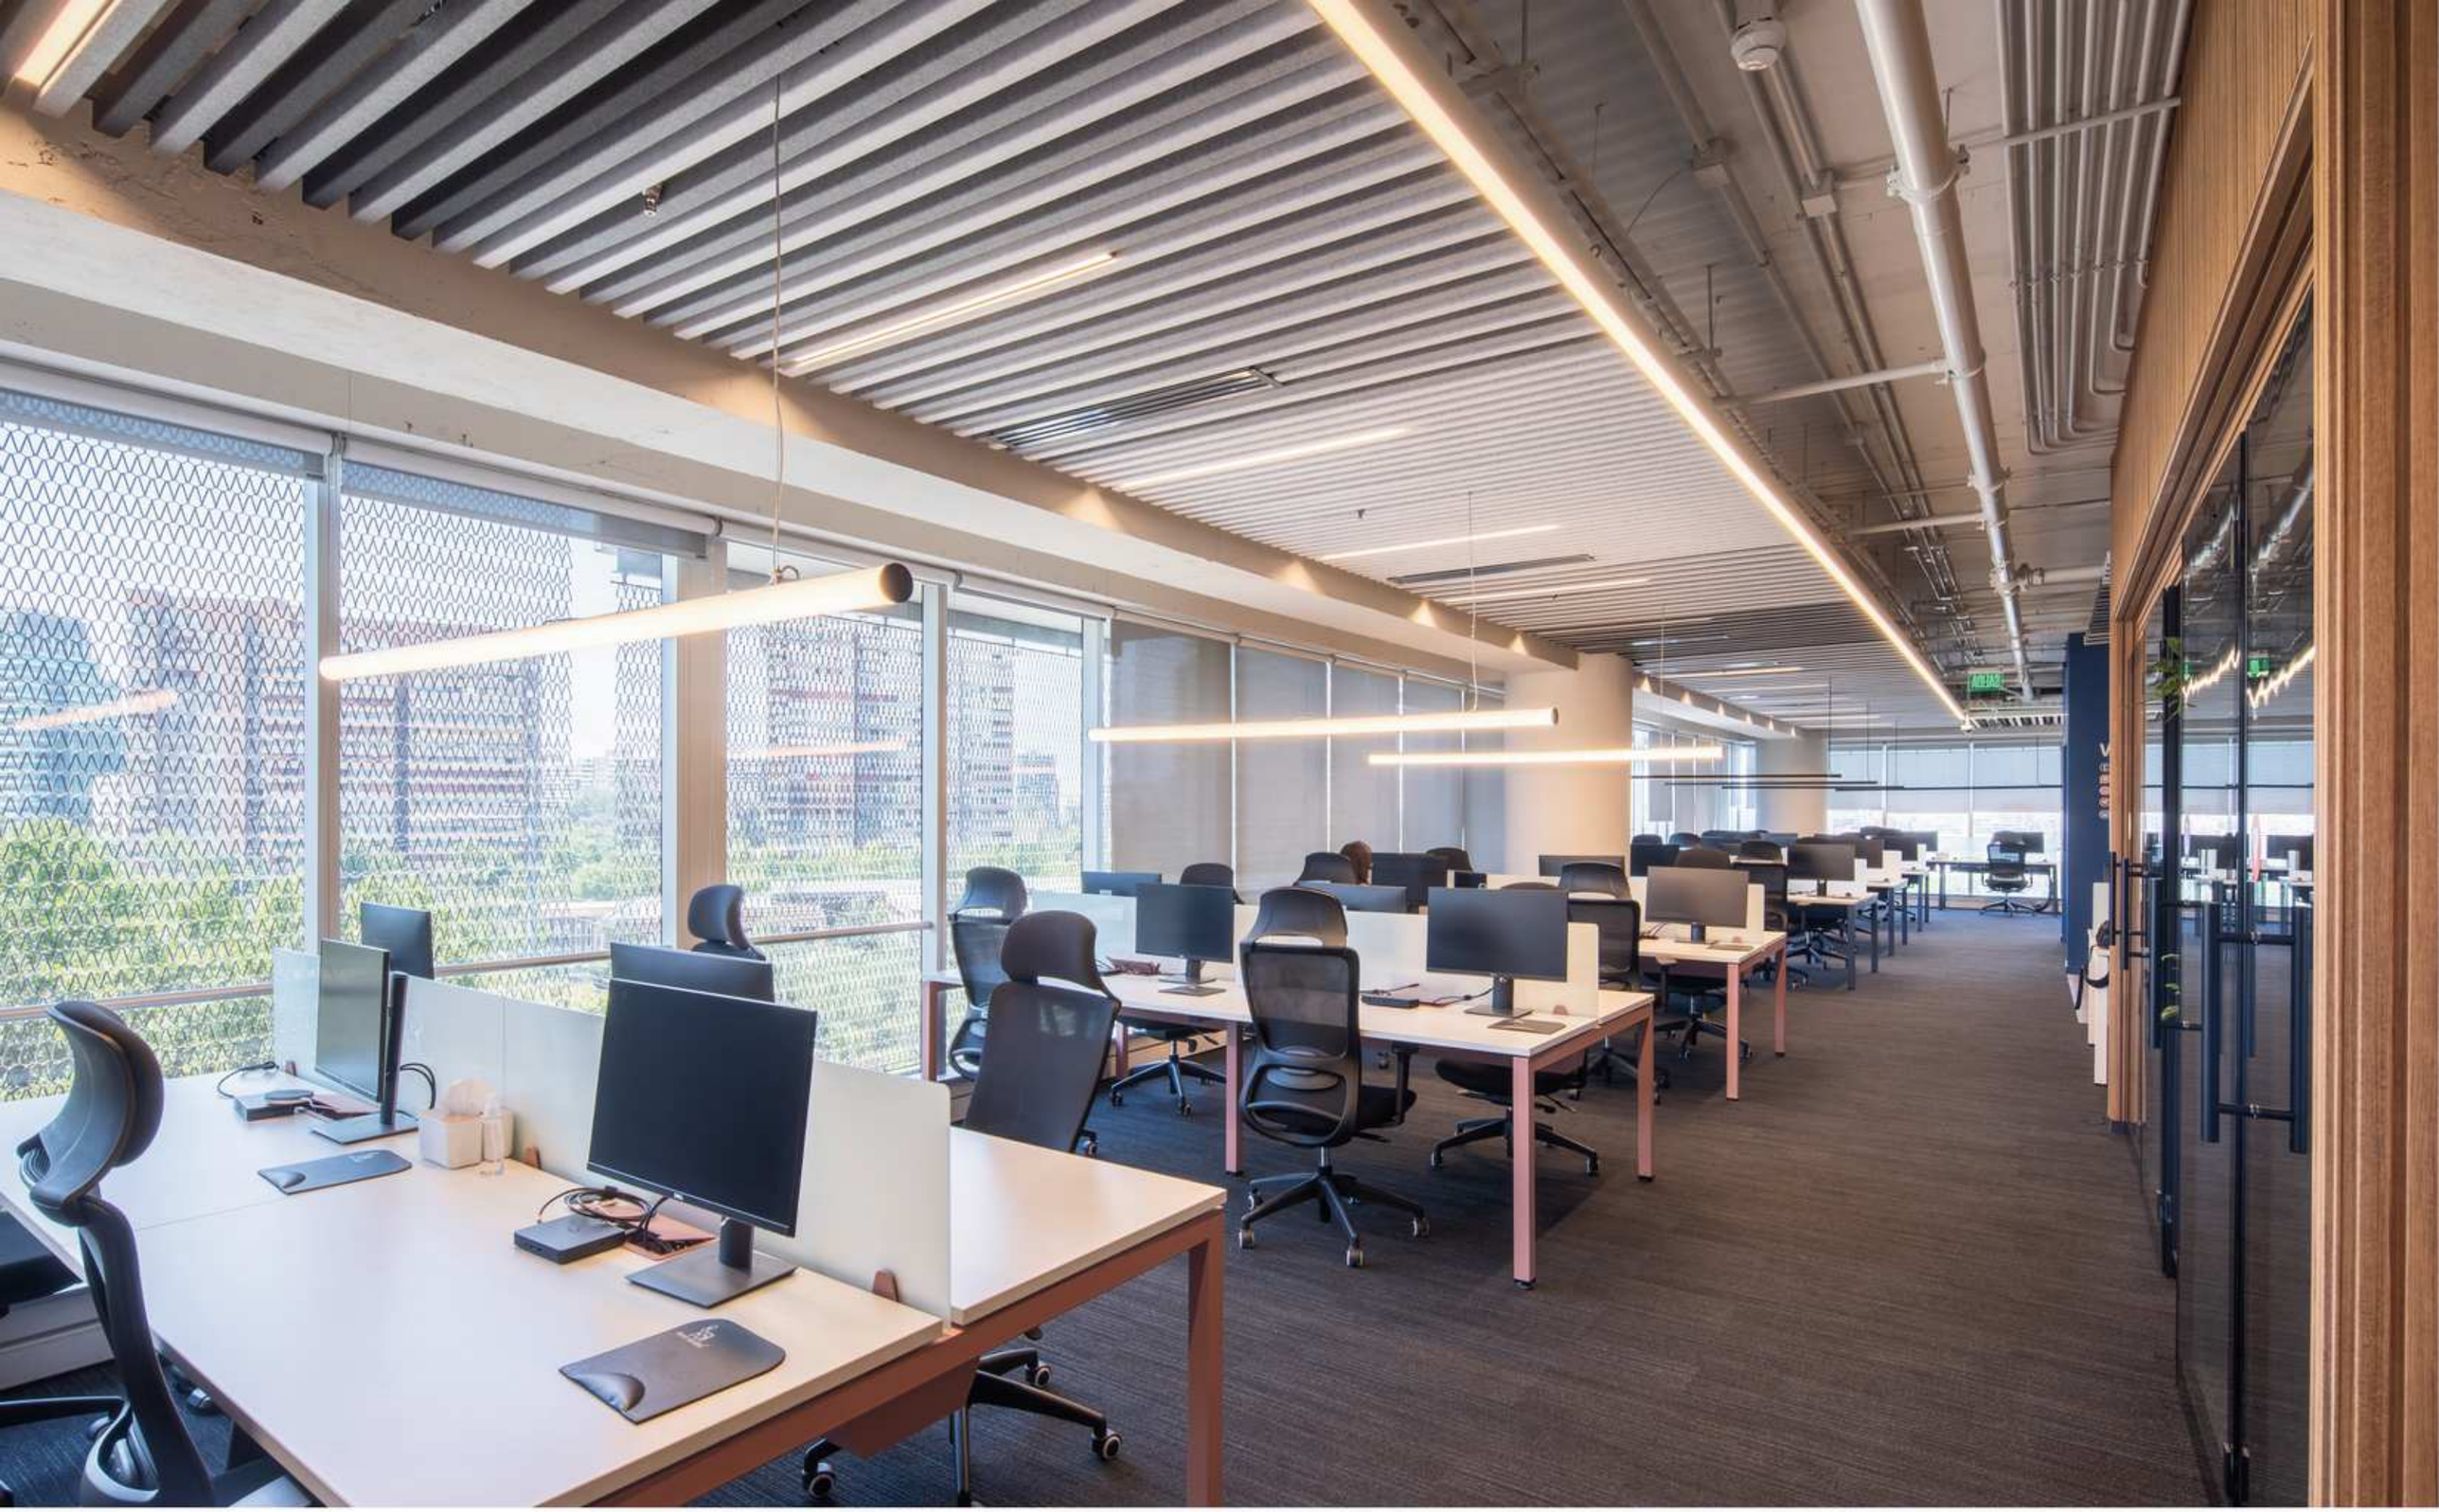

Novo Nordisk | Architecture: FMZ Arquitectura. | Lighting Design: Docevolts-Francisca Nicoletti.

LT60

270DEGREE-ILLUMINATING
TUBULAR

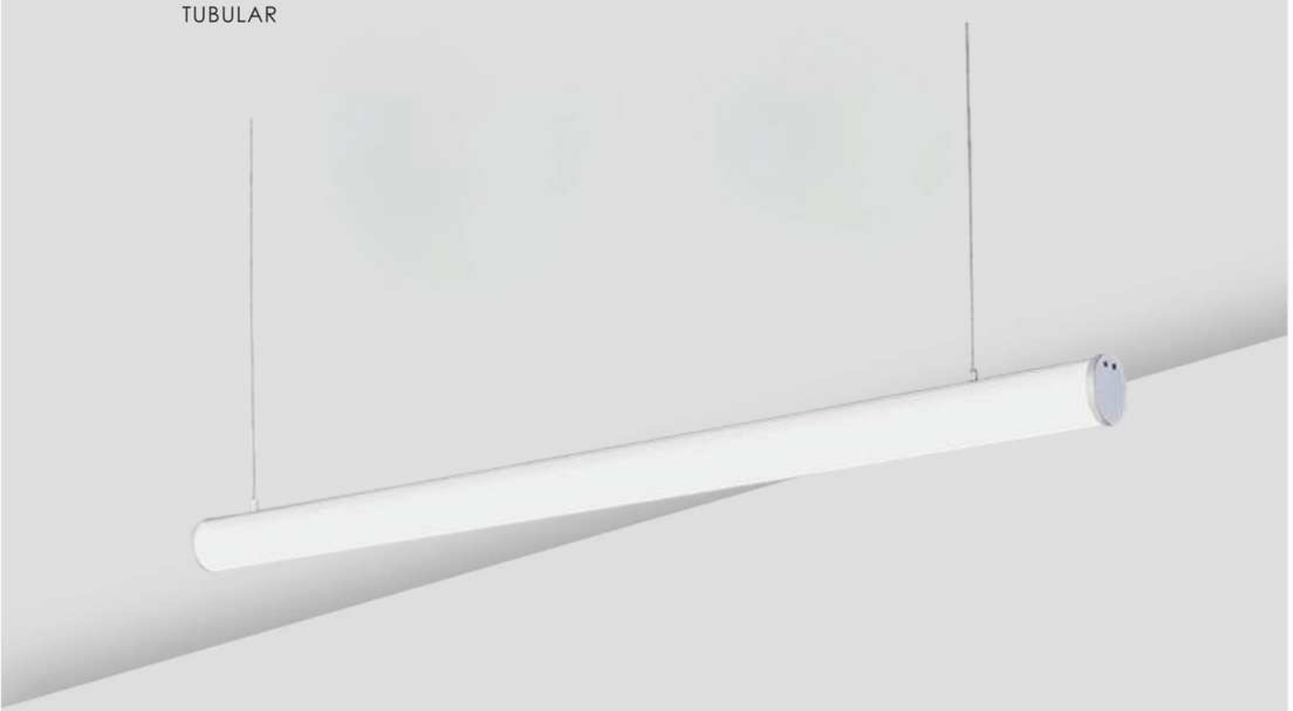


TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LT60-600	570*D60mm(2FT)	18W	3060Lm	1800Lm
LT60-1200	1130*D60mm(4FT)	36W	6120Lm	3600Lm
LT60-1500	1410*D60mm(5FT)	45W	7650Lm	4500Lm
LT60-1800	1690*D60mm(6FT)	54W	9180Lm	5400Lm
LT60-2400	2250*D60mm(8FT)	72W	12240Lm	7200Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

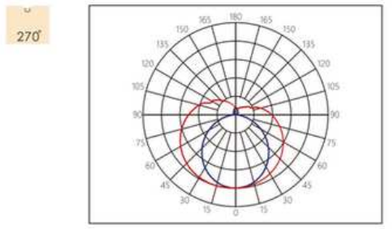







PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Plastic end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
塑料端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。



TECH K Offices | Architecture and Lighting Design: Central Corp.

LT60

LT80

360DEGREE-ILLUMINATING
TUBULAR




TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LT80-600	570*D80mm(2FT)	18W	3060Lm	1800Lm
LT80-1200	1130*D80mm(4FT)	36W	6120Lm	3600Lm
LT80-1500	1410*D80mm(5FT)	45W	7650Lm	4500Lm
LT80-1800	1690*D80mm(6FT)	54W	9180Lm	5400Lm
LT80-2400	2250*D80mm(8FT)	72W	12240Lm	7200Lm


PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

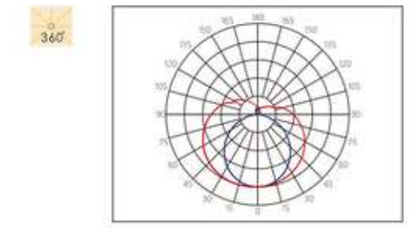



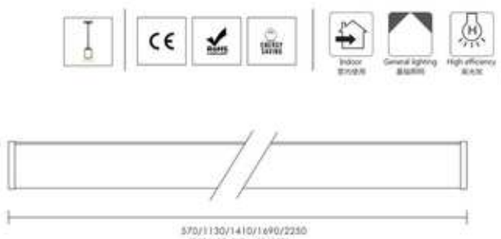



PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip.
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Plastic end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电源选用无频闪，质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小，减少后期维护费用。
塑料端盖，灯具线条棱角柔和，外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和剥花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。



Launch Coworking Vespucio | Architecture: Launch Coworking.

LT80

LT120

270DEGREE-ILLUMINATING
TUBULAR




TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LT120-600	570*D120mm(2FT)	18W	3060Lm	1800Lm
LT120-1200	1130*D120mm(4FT)	36W	6120Lm	3600Lm
LT120-1500	1410*D120mm(5FT)	45W	7650Lm	4500Lm
LT120-1800	1690*D120mm(6FT)	54W	9180Lm	5400Lm
LT120-2400	2250*D120mm(8FT)	72W	12240Lm	7200Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

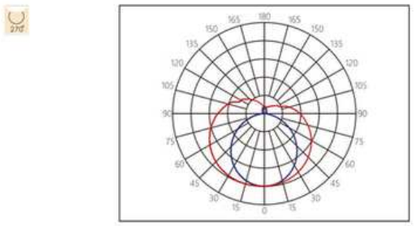



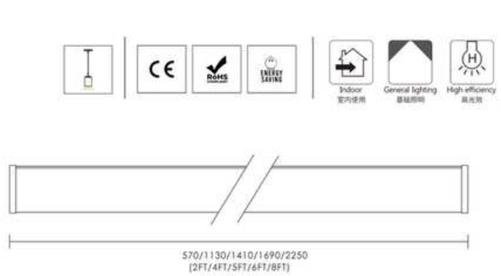




PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip,
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Plastic end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
塑料端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

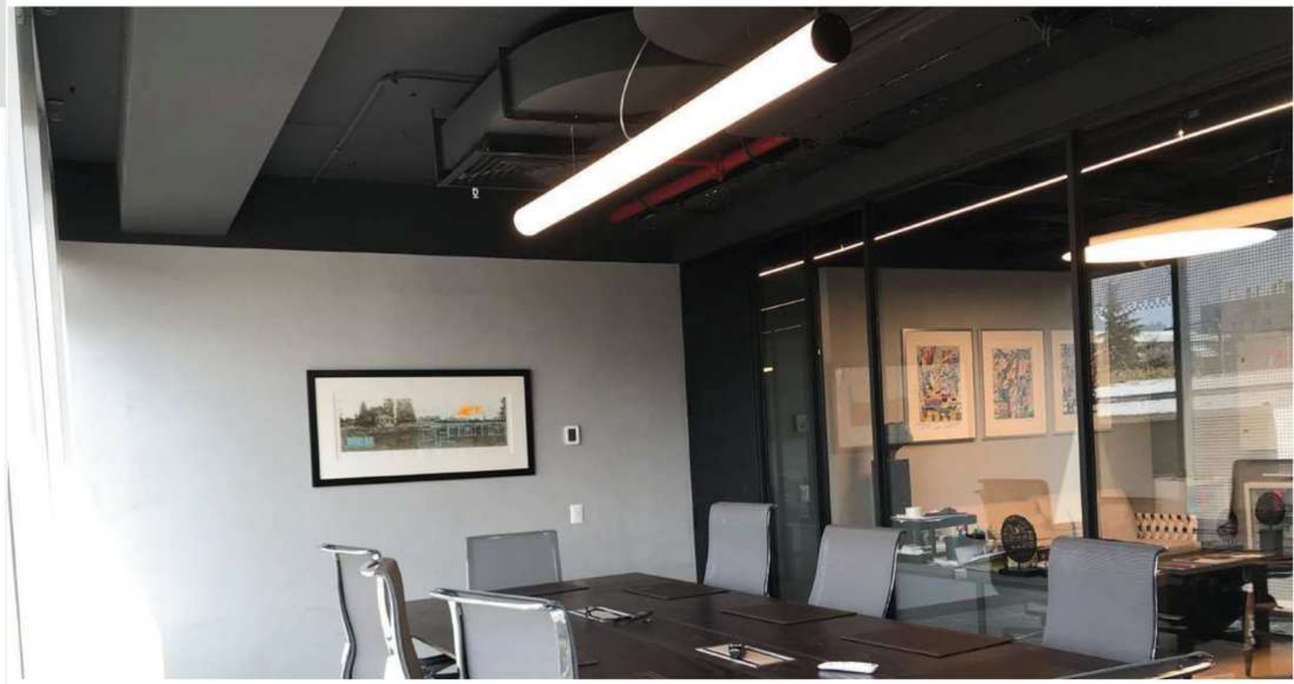


IGS GROUP Offices | Architecture: Elton y Leniz Arquitectos | Lighting Design: LEVO Studio.

LT120





1.Showroom Sien Kitchen | Architecture: Sien Kitchen. 2. Launch Coworking Vespucio | Architecture: Launch Coworking.

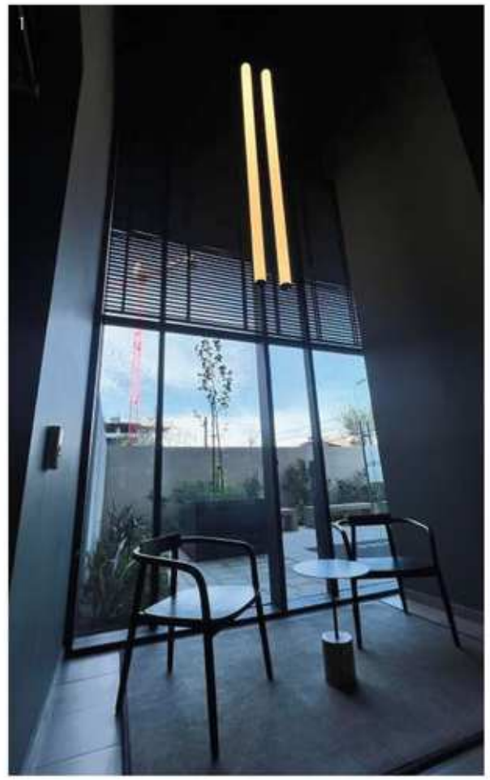








1. Building Hall | Architecture and Design: Orlando Gatica Studio | 2. MUREX Offices | Architecture and Lighting Design: Collective Architecture. 3. JRI Investigation Center | Architecture: Toro & Sitja . 4. GLOBANT Offices | Architecture and Lighting Design: Ael Spaces.

OPTICS

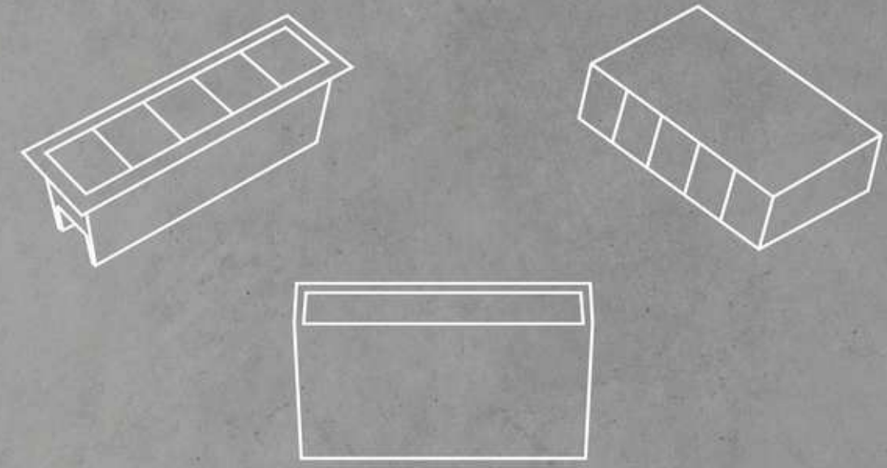

OPTICS
SERIES

SURFACE | RECESSED | WALL WASHER


OPTICS SERIES

SURFACE | RECESSED | WALL WASHER

With its minimal design and advanced optics technology, OPTICS is a versatile solution for both surface and recessed mounting, integrating seamlessly with architecture.

Thanks to its high-performance lenses, this series is ideal for high-ceiling spaces as well as residential or institutional projects, offering adaptability to diverse requirements. It is available with asymmetric optics for striking wall washer effects or symmetric optics for uniform general lighting, making it suitable for a wide range of applications.

Available in three different lengths, OPTICS combines anti-glare comfort, elegance, and technical precision, turning light into a tool to elevate every project.

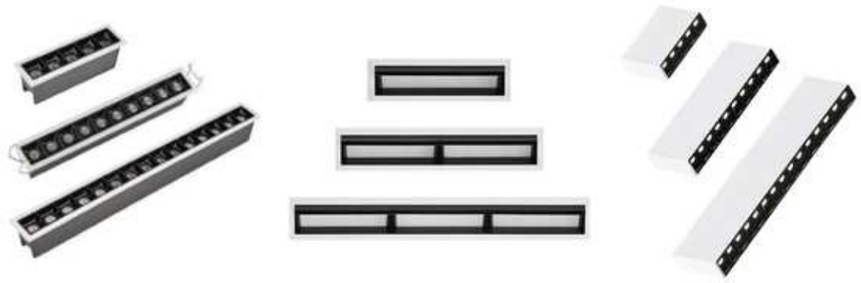



Almasur Providencia Hotel | Architecture: Del Campo-Labbé Arquitectos.



TURBUS Bus Station | Architecture: Estudio FES. | Lighting Design: Diseño de Luz.

3580H1
ONE OPTIC MODULE




TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LC3580H1	138*35*80mm(5.4")	5W	700Lm	450Lm


PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节

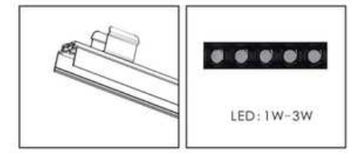

LIGHT DISTRIBUTION CURVE 光强分布曲线

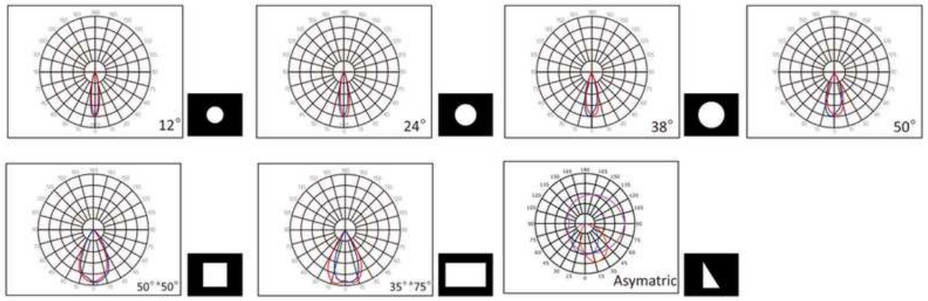

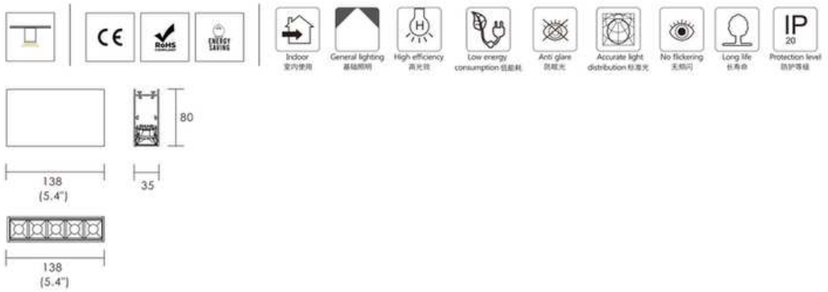

PRODUCT FEATURE 产品特点


· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency optic lens,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

3580H1

3580H2
TWO OPTIC MODULE



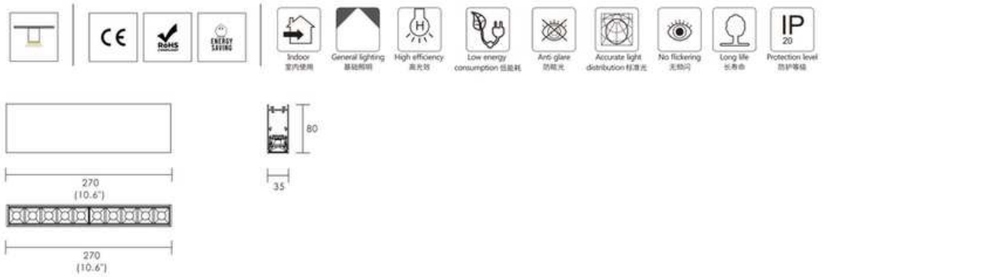

PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps.No screw to be appeared.No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency optic lens,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LC3580H2	270*35*80mm(10.6")	10W	1400Lm	900Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

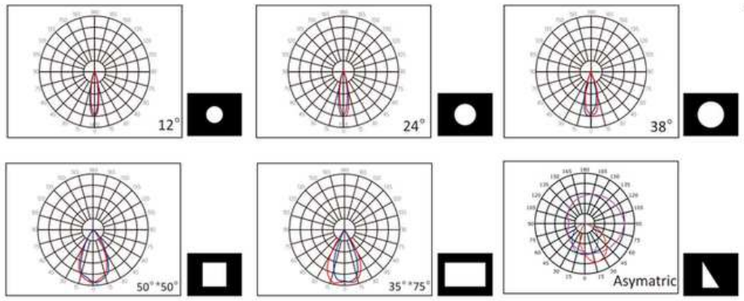

3580H2

3580H3

THREE OPTIC MODULE




TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LC3580H3	408*35*80mm(10.3")	15W	2100Lm	1260Lm


PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

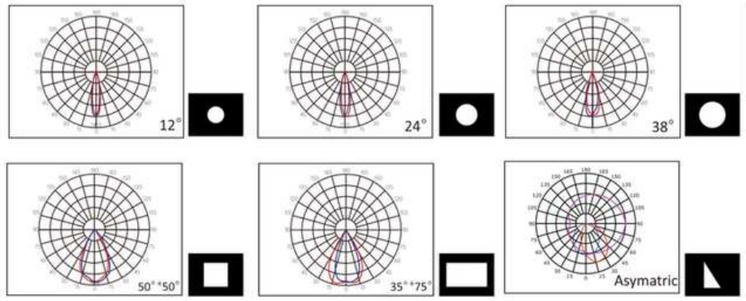

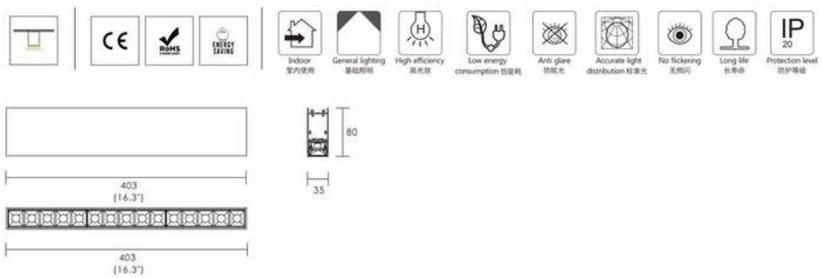

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip.
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条棱朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

3580H3







Magasich Offices | Architecture: Francisco Vivanco. | Lighting Design: Diseño de Luz.






TURBUS Bus Station | Architecture: Estudio FES. | Lighting Design: Diseño de Luz.




BNP Paribas Cardif | Architecture and Lighting Design: Grupo E.

3580W1
ASYMMETRIC MODULE

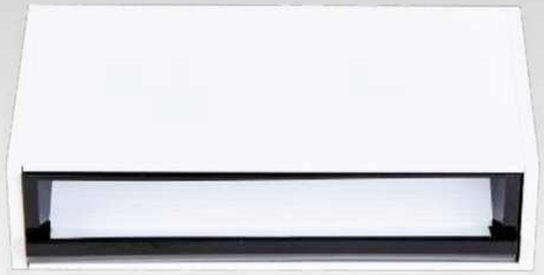





PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip,
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency optic lens,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条棱朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LC3580W1	138*35*80mm(5.4")	5W	700Lm	450Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节

LIGHT DISTRIBUTION CURVE 光强分布曲线






3580W1

3580W2

TWO ASYMMETRIC MODULE



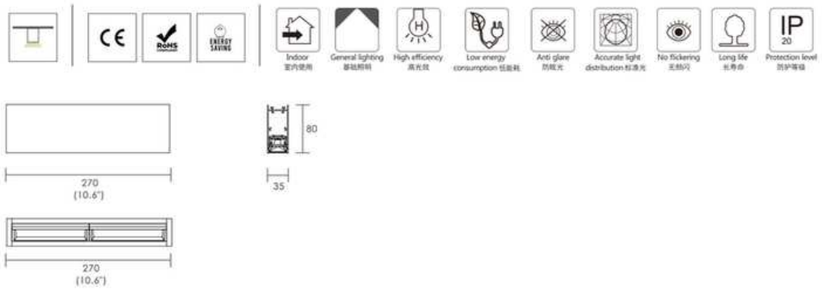

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip.
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LC3580W2	270*35*80mm(10.6")	10W	1400Lm	900Lm

PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线






3580W2

3580W3

THREE ASYMMETRIC MODULE



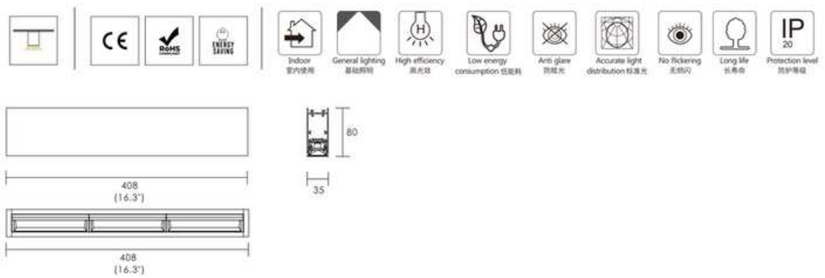

PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency optic lens,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条棱朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LC3580W3	408*35*80mm(10.3")	15W	2100Lm	1260Lm

PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线







3580W3





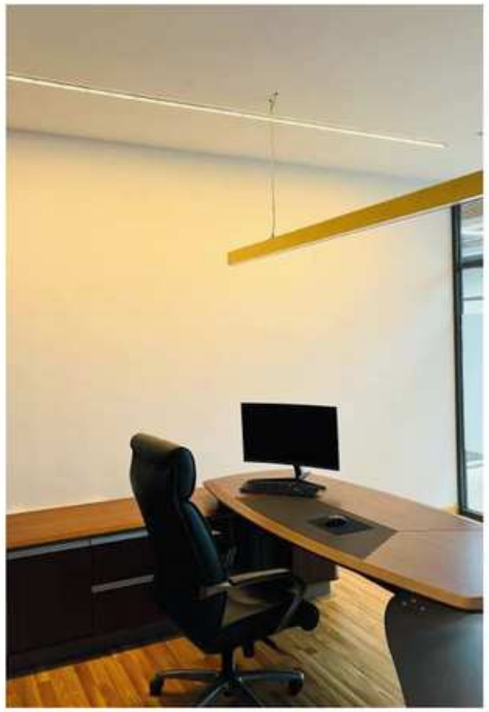

1.Artesania de Chile Store| Lighting Design: Antonia Peon| 2. Vista Libre Offices| Architecture: PUA Diseño. | Lighting Design: MA Studio.
3. CROMATIX Factory Offices| Lighting Design: CROMATIX.

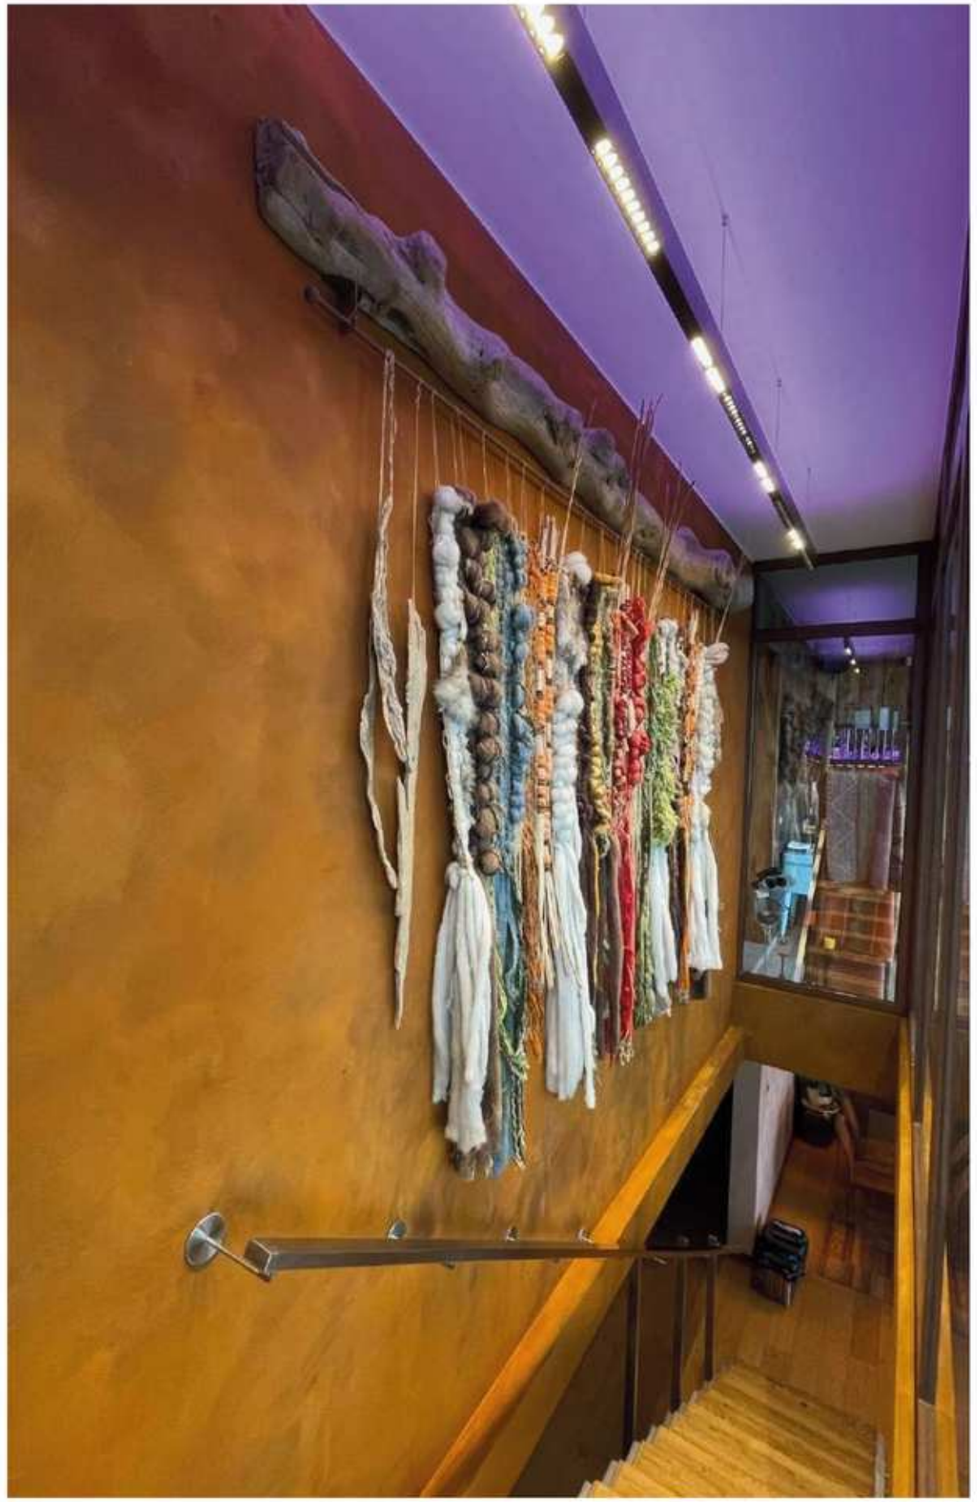

Residential Project| Lighting Design: Luminova team.

4737H1


ONE OPTIC MODULE











PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency optic lens,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观，外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737H1	150*47*37mm(5.9")	5W	700Lm	450Lm

PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节






LIGHT DISTRIBUTION CURVE 光强分布曲线

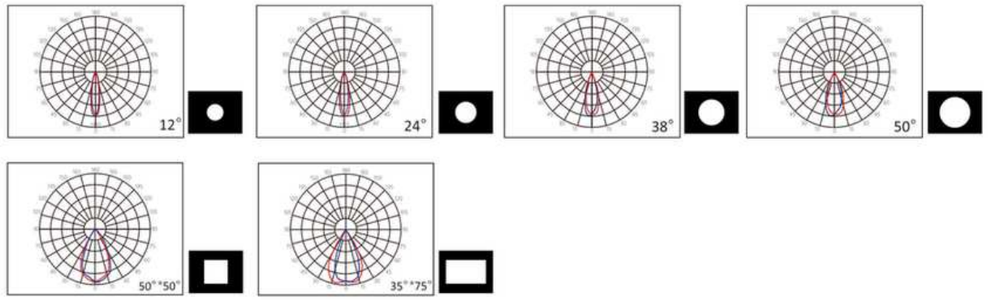

4737H1


4737H2


TWO OPTICS MODULE

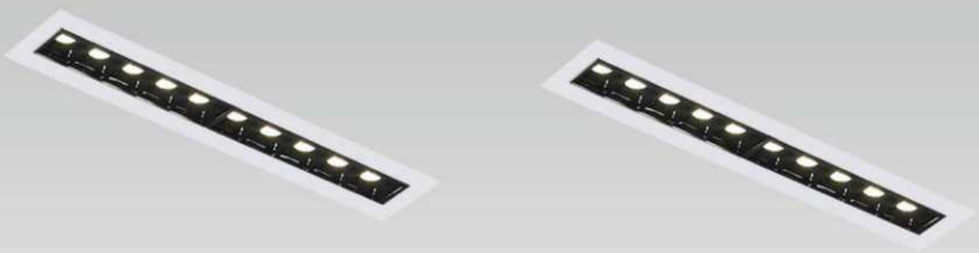









PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency optic lens,no shawdon,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737H2	283*47*37mm(11.1")	10W	1400Lm	900Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节

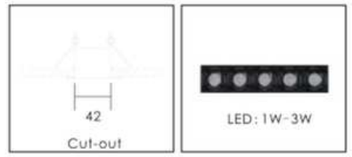

LIGHT DISTRIBUTION CURVE 光强分布曲线

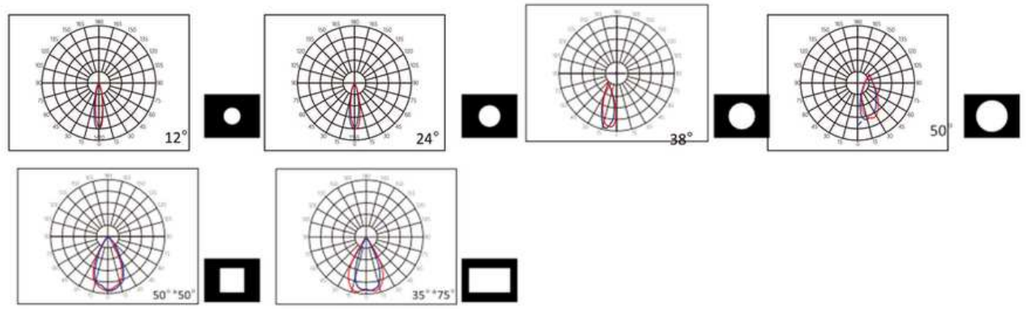


4737H2

4737H3

THREE OPTICS MODULE



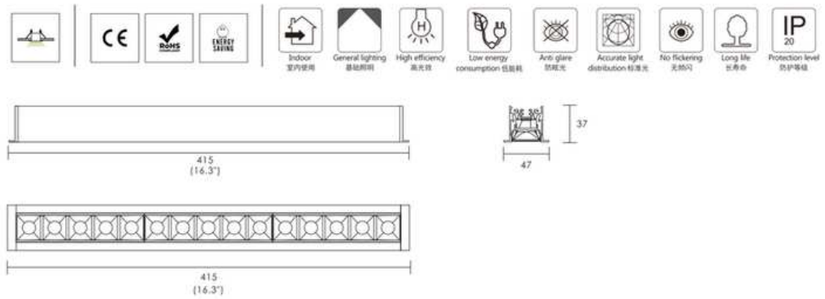

PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency optic lens,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条棱角美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737H3	415*47*37mm(16.3")	15W	2100Lm	1350Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

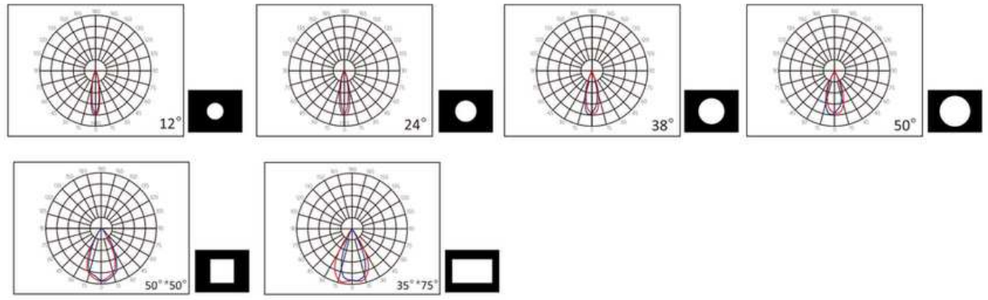

4737H3

4737W1

Asymmetric






TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737W1	150*47*37mm(5.9")	5W	700Lm	450Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



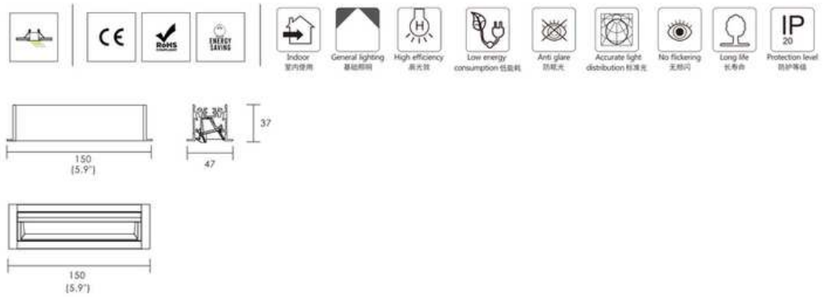


PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency optic lens,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条棱角美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

LIGHT DISTRIBUTION CURVE 光强分布曲线






4737W1

4737H2

TWO OPTICS MODULE



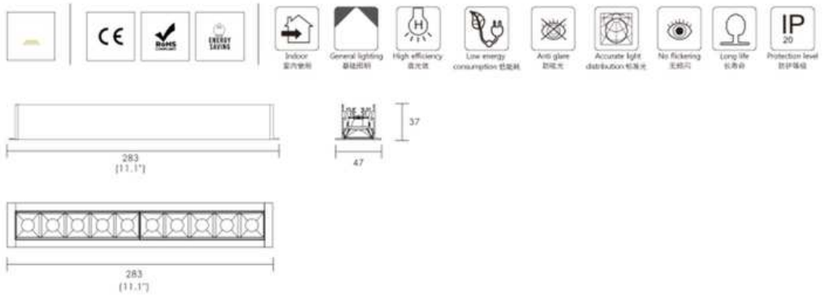

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip.
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小，减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737H2	283*47*37mm(11.1")	10W	1400Lm	900Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节




LIGHT DISTRIBUTION CURVE 光强分布曲线

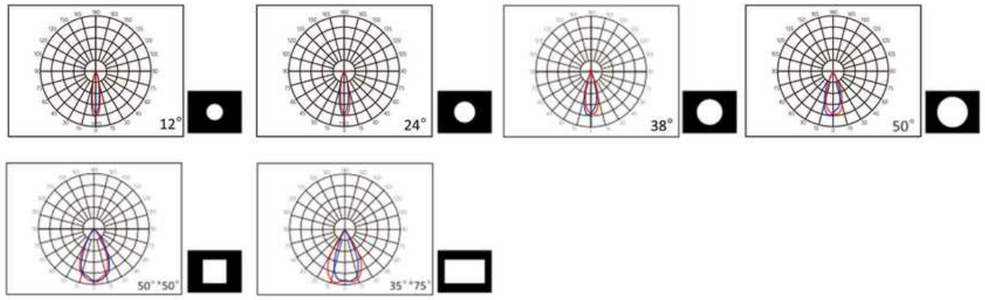

4737H2

4737W3

Asymmetric




TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737W3	413*47*37mm(16.3")	5W	700Lm	450Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



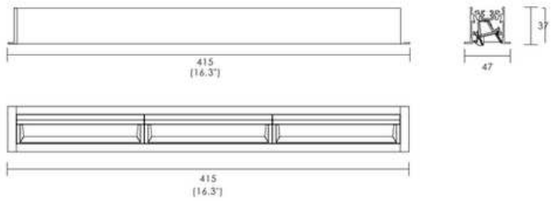


PRODUCT FEATURE 产品特点

· Equipped with non-flicking driver and high lumen SMD led chip.
· Options for 1-10V dimming,dali dimming and color changing driver.
· Long lifespan up to 50000hours,low decay and low maintanence cost.
· Distinguished end-caps,No screw to be appeared,No light leak.
· High grade aluminum,high quality surface painting.
· Fast and easy connection with no shadow.
· High efficiency optic lens,anti-glare feature,easy installation to any shape.
· Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条棱角美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

LIGHT DISTRIBUTION CURVE 光强分布曲线





4737W3









1,2. TURBUS Bus Station | Architecture: Estudio FES. | Lighting Design: Diseño de Luz. | 3. BNP Paribas Cardif | Architecture and Lighting Design: Grupo E.
4. Architecture: Larroulet Corbera Arquitectos | Lighting Design: Luz + Diseño - Gaspar Arenas.






1,2: BNP Paribas Cardif | Architecture and Lighting Design: Grupo E.





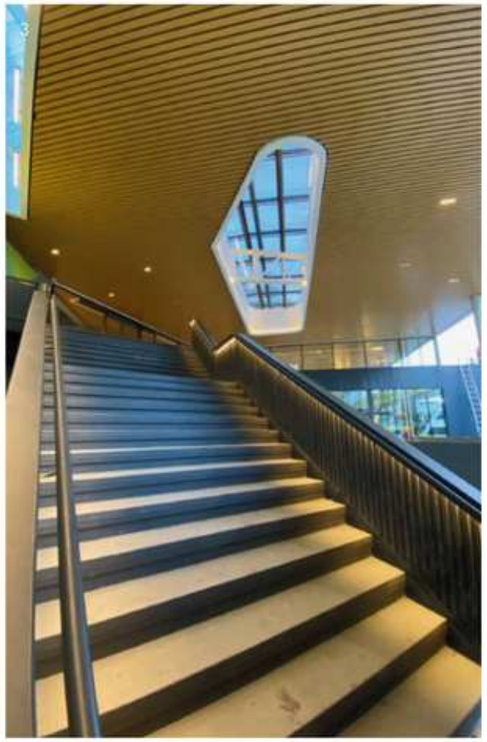



1. BUPA Las Condes | Architecture: Luis Villanueva | Lighting Design: Diseño de Luz | 2. Almasur Providencia Hotel | Architecture: Del Campo-Labbé Arquitectos.
3. TURBUS Bus Station | Architecture: Estudio FES. | Lighting Design: Diseño de Luz. | 4. BNP Paribas Cardif | Architecture and Lighting Design: Grupo E.







1. BNP Paribas Cardif | Architecture and Lighting Design: Grupo E. | 2,3. Magasich Offices | Architecture: Francisco Vivanco. | Lighting Design: Diseño de Luz.