

# CATALOG Architectural Lighting Series

- ♥ CROMATIX CHILE | Showroom Las Condes Design, Av. Las Condes 9765, Local N°220, Las Condes. Santiago, Chile.
- CROMATIX CHILE | Office Warehoure. Avenida Americo Vespucio 896, Peñalolen. Santiago, Chile.
- CROMATIX CHINA | Factory Showroom No.36, Donghailiu Road, Dongfeng Town, Zhongshan city Guangdong, China.

#### 中山市科麦思照明电器有限公司

- ♥ 地址:广东省中山市东凤镇东海六路36号
- ℃ 电话:86-(0)760-22632656
- ➡ 邮箱:sales@cromatix-lighting.com
- 网站:www.cromatix-lighting.com
- © cromatix\_lighting

## LIGHTING INTELLIGENCE

Lighting is more than a technical requirement — it is the invisible language that transforms architecture. A thoughtful lighting design highlights shapes, brings materials to life, and creates emotions that remain in memory.

At CROMATIX®, we believe light is intelligence applied to design — lighting intelligence — because it reveals details, enhances aesthetics, and creates unique experiences within every space.



Partner







































### **ABOUT US**

#### 企业简介

At CROMATIX®, we design, develop, and manufacture professional architectural lighting systems built on innovation, quality, and trusted expertise. From the beginning, our philosophy has been clear: to deliver lighting solutions that ensure comfort, highlight design, and exceed expectations.

Our portfolio includes linear, curved, circular, panel, spotlight, and tubular systems, with versatile mounting options such as suspended, surface-mounted, recessed, and wall-mounted. Every unit is produced under strict quality management, backed by international certifications (CE, RoHS, ETL/c-ETL, FCC) and a 5-year warranty.

We manufacture with reliable electronic components from leading brands such as Osram, Tridonic, CREE, Lifud, Everlight, among others, ensuring performance, durability, and safety in every product. Together with a strong in-house R&D team, continuous laboratory testing, and a production capacity of over 10,000 units per month, we guarantee consistency, innovation, and long-term value.

Today, with our headquarters in Chile and our factory in Zhongshan, we operate as a global brand, supporting projects and partners across diverse markets. More than a manufacturer, we are a partner for ambitious projects, offering tailored solutions, technical expertise, and long-term reliability.

在 CROMATIX®, 我们基于创新、品质和值得信赖的专业知识,设计、开发和制造专业的建筑照明系统。从一开始,我们的理念就很明确:提供确保舒适、突出设计并超越期望的照明解决方案。

我们的产品组合包括线性、弧形、圆形、面板、聚光灯和管状系统,提供灵活的安装选项,例如悬挂式、表面安装式、嵌入式和壁挂式。每台设备均在严格的质量管理下生产,并获得国际认证(CE、RoHS、ETL/c-ETL、FCC)和5年保修的支持。

我们采用欧司朗(Osram)、特瑞德(Tridonic)、科锐(CREE)、莱福德(Lifud)、亿光(Everlight)等领先品牌的可靠电子元件进行制造,确保每款产品的性能、耐用性和安全性。我们强大的内部研发团队、持续的实验室测试以及每月超过10,000台的生产能力,共同保证了产品的一致性、创新性和长期价值。

如今,我们的总部设在智利,工厂位于中山,我们作为一个全球品牌运营,为不同市场的项目和合作伙伴提供支持。我们不仅仅是一家制造商,更是雄心勃勃的项目的合作伙伴,提供定制化解决方案、技术专长和长期可靠性。











# DESIGNING ENGINEERING MANUFACTURING





Lighting Solutions for Every Project 项目照明全方案

At CROMATIX®, we have the capacity to meet the needs of diverse projects and clients. From supplying products for specific architectural requirements to providing large-scale volumes for distributors and wholesalers, we adapt to different markets with efficiency and reliability.

Our strength lies in combining flexibility, innovation, and quality, ensuring that every project — whether unique or large-scale — receives the right lighting solution.







#### Global Presence, International Exhibitions 全球布局,国际展会

We believe in connecting with the industry worldwide. That is why CROMATIX® actively participates in the most prestigious lighting fairs, such as Light + Building (Frankfurt) and the Hong Kong International Lighting Fair, as well as exhibitions across Latin America.

These platforms allow us to showcase our latest innovations, build strong partnerships, and bring our products closer to new clients in different markets.

## WORLDWIDE SHIPPING

& PARTENERSHIPS

#### Areas of expertise



















#### Become a CROMATIX Partner

成为 CROMATIX 合作伙伴

Join our network and bring our lighting products to your market.

We offer international shipping by air and sea to the agreed destination, with customs clearance, import processes, and goods collection managed according to local regulations (customer responsibility). With our strong production capacity, reliable lead times, and dedicated support, we make sure our products reach you efficiently and safely.

More than shipping, we provide the confidence of a global brand, ensuring that your business can count on consistent quality and supply.

CROMATIX CHILE | Showroom

Las Condes Design, Av. Las Condes 9765, Local N°220, Las Condes. Santiago, Chile. CROMATIX CHILE | Office - Warehoure

Avenida Americo Vespucio 896, Peñalolen, Santiago, Chile. CROMATIX CHINA | Factory - Showroom No.36, Donghailiu Road, Dongfeng Town, Zhongshan city Guangdong, China.

## **INDEX**





#### **XPANEL SLIM SERIES**

14 - 33

90 - 129

SUSPENDED | SURFACE










SUSPENDED | SURFACE




**XCURVE & XRING SERIES** 

**XPANEL FLAT SERIES** 

SUSPENDED | SURFACE






34 - 57

SUSPENDED | SURFACE



**XLINE SERIES** 










130 - 197

**XPANEL SERIES** 

SUSPENDED | SURFACE








58 - 89

RECESSED








198 - 223


## **INDEX**


#### **XTUBE SERIES**

224 - 237

HORIZONTAL SUSPENSION | VERTICAL SUSPENSION








#### **OPTICS SERIES**

238 - 277

SURFACE | RECESSED | WALL WASHER















Transtel Nayax Offices | Architecture: Espiral Architecture | 2. Kia Showroom | Architecture: Indigo Arquitectos | Concept Design: KIA Corea.
 CEN Offices | Architecture: Jorge Iglesis | Interior Design: OArquitectos. 1 Lighting Design: Diseño de Luz.









Lonco House | Lighting Design: Soledad Newman | 2. BASH Vespucio Showroom | Architecture: WORKPLACES.
 Transtel Nayax Offices | Architecture: Espiral Architecture | 4. Medical Center Bradfor Hill. | Architecture: Cristian Maze.










1. Globant Offices | Architecture and Lighting Design: Ael Spaces | 2. Turbus Bus Station | Architecture: Estudio FES | Lighting Design: Diseño de Luz. 3. MK Studio | Lighting Design: Luz + Diseño - Gaspar Arenas.



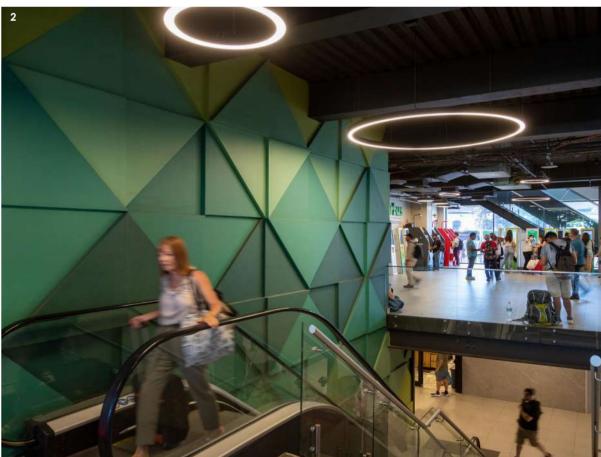

1. Bubble Gummers | Lighting Design: Matte Iluminacion. | 2. Turbus Bus Station | Architecture: Estudio FES | Lighting Design: Diseño de Luz.

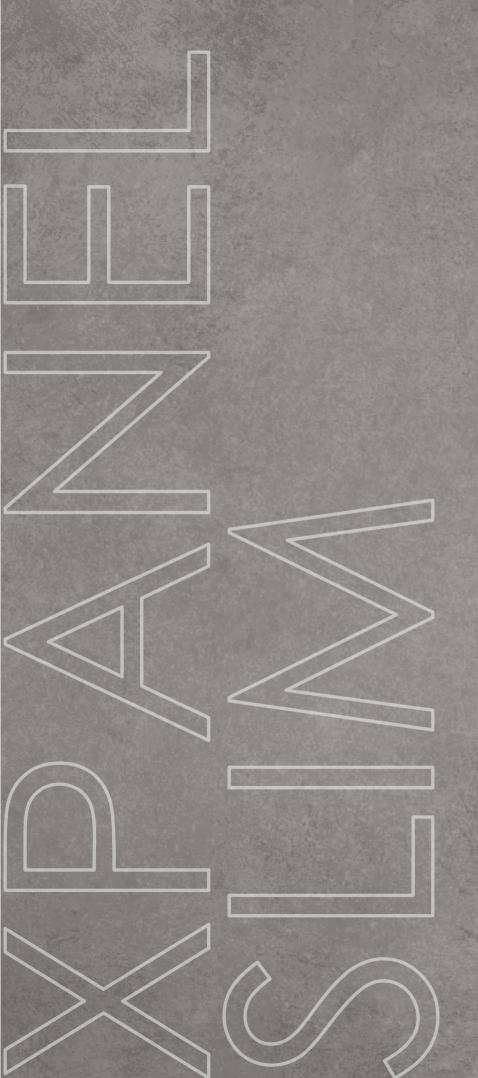

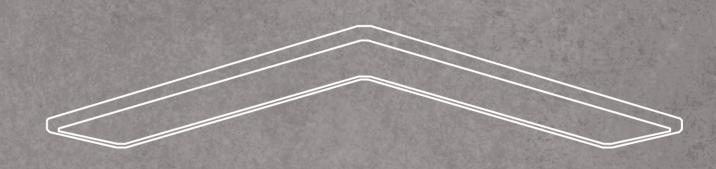

## XPANEL SLIM SERIES

SUSPENDED | SURFACE

## NEW SERIES XPANEL SLIM

IT ALL BEGINS WITH A SIMPLE IDEA:

MAKE THE TRADITIONAL PANEL MORE FLEXIBLE!









## **CONTINOUS**

Luminaires can be connected seamlessly and without limits, solving the traditional problem of LED panels that cannot be linked.

Perfect for both residential and commercial spaces.

## **ADAPTABLE SYSTEM**

The lighting configuration can be modified at any time, ensuring flexibility for evolving project needs.

## QUICK CONNECTION

Special straight connectors provide maximum design freedom.

Luminaires can be reinstalled, combined, or extended with a single click — no tools required.

20

#### LP2017

#### PRISMATIC DIFFUSER

棱晶防眩罩

































#### PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in diff erent versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。

寿命长达5万小时,光衰小、减少后期维护费用。

灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。

高透光扩散型控光罩,出光均匀,防炫效果好

应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数 Light Distribution Curve



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LP2017P-1170	L1170*H17mm	30W	7200Lm	3300Lm
LP2017P-1450	L1450*H17mm	45W	10800Lm	4950Lm



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LP2017PU-1170	L1170*H17mm	42W	10080Lm	4620Lm
LP2017PU-1450	L1450*H17mm	52W	12480Lm	5720Lm

#### PRODUCT OPTION 可选产品配置 Light Distribution Curve


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI • Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None





## **CURVED PANEL**

- Aluminium curved profile housing with ultra-slim design.
- Can be configured as a whole circle or continuous segments.
- Tool-less connection system allows quick linking of multiple panels.
- Fast installation with a tool-free mounting system.
- Available in direct or direct/indirect light distribution using LGP technology.

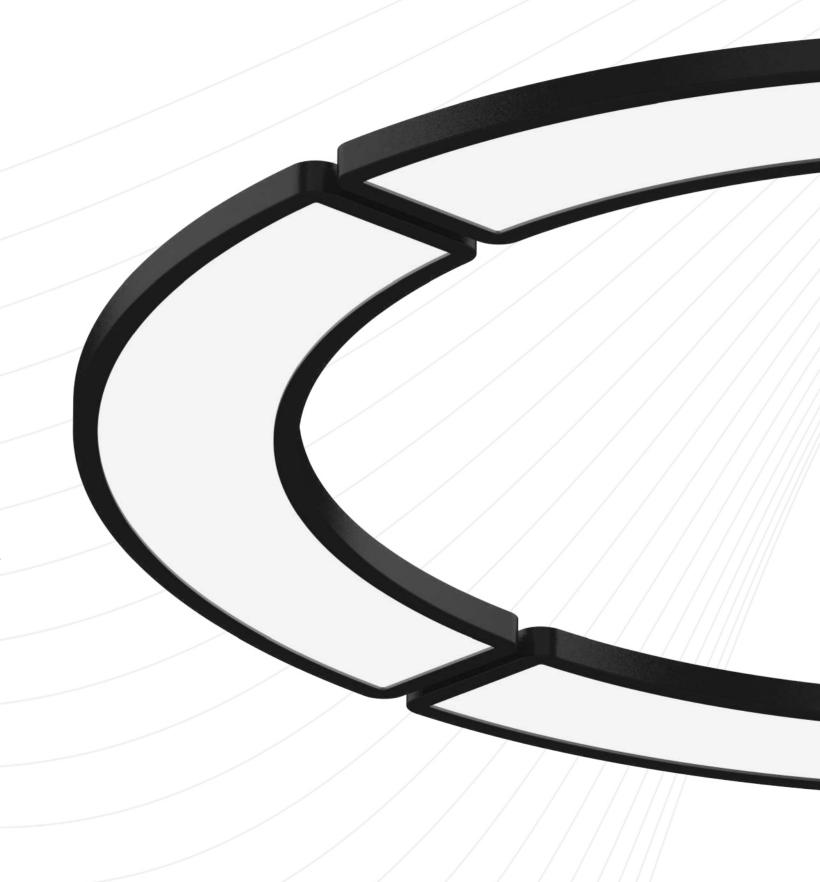

#### RP2017

#### PRISMATIC DIFFUSER

棱晶防眩罩

































#### PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in diff erent versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。 寿命长达5万小时,光衰小、减少后期维护费用。

灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 高透光扩散型控光罩,出光均匀,防炫效果好

应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
RP2017P-1500 1/4	D1538*H17mm 1/4	30W	7200Lm	3300Lm
Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
RP2017PII-1500 1/4	D1538*H17mm 1/4	42W	100801 m	46201 m

#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None





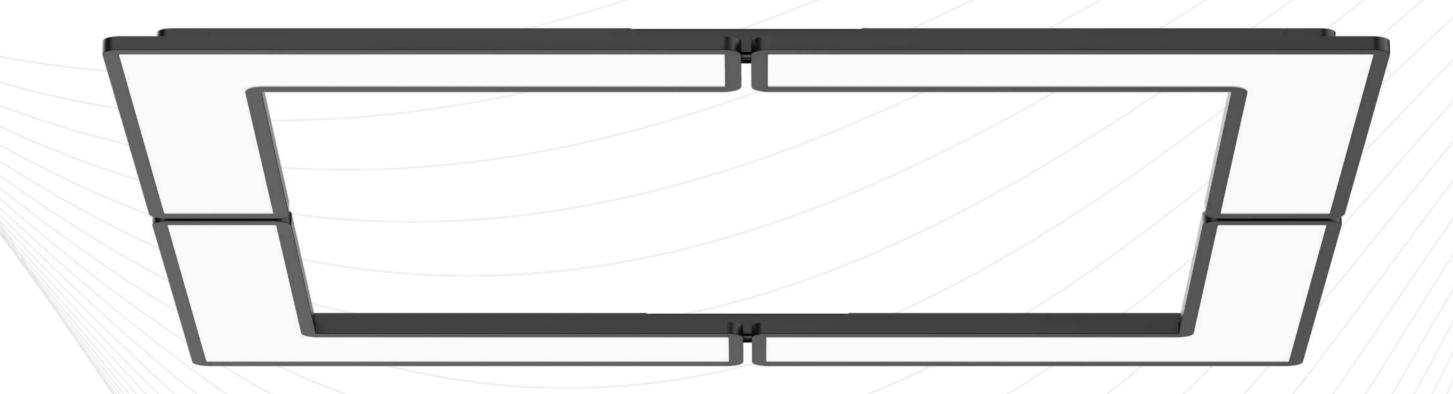

## **SQUARE PANEL**

- Formed by combining four L-shapes with equal side lengths.
- Can be configured as a square or extended into a rectangle by adding straight lines.
- Available in direct or direct/indirect light distribution versions.

28

#### SP2017

#### PRISMATIC DIFFUSER

棱晶防眩罩





30



























Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost effectively and energy efficiently, while maintaining  $\boldsymbol{\alpha}$ clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。 寿命长达5万小时,光衰小、减少后期维护费用。 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 高透光扩散型控光罩,出光均匀,防炫效果好 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数

Item No. 产品型	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
SP2017P-L	763*763*H17mm	38W	9120Lm	4180Lm
Item No. 产品型	型号 Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
SP2017PU-L	763*763*H17mm	52W	12480Lm	5720Lm

#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI • Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□None


31


## DESIGN POSSIBILITIES


Free your creativity


The entire XPANEL Slim series can be connected seamlessly.

Designers and architects gain the freedom to create **limitless shapes**.










From squares and rectangles to S-shapes or complex geometries.

The system adapts easily to any concept or space.

Lighting becomes a tool for creativity, transforming spaces with endless possibilities.



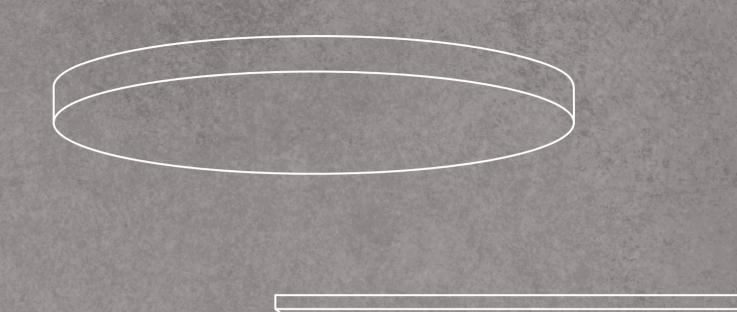

# XPANEL FLAT SERIES

SUSPENDED / SURFACE

## XPANEL FLAT SERIES

## LED PANEL SURFACE | SUSPENDED

The beauty of simplicity comes to life with XPANEL FLAT. Ultra-thin circular and square panels, suspended or surface-mounted, bring harmony and elegance to any environment. Thanks to their super-thin profile, they blend discreetly into architecture, almost invisible yet always delivering refined and functional light.

Combine different sizes to create unique compositions full of personality, or let a single panel become the subtle centerpiece that transforms the atmosphere.

Versatile and timeless, XPANEL FLAT adapts to both grand open spaces and intimate rooms, in residential or institutional settings. And when paired with round acoustic panels, light and comfort merge into a perfect balance.







## **DIRECT**

As a traditional panel, direct lighting is the basic version. It requires several strategically placed fixtures to achieve an even distribution of light across the space



## DIRECT / INDIRECT

This option combines sidelighting with an additional indirect component, creating a more relaxing and ambient atmosphere. Ideal for making spaces feel comfortable, balanced, and inviting.

38

#### CABLE SUSPENDED/PRISMATIC DIFFUSER

吊线安装/棱晶防眩罩





























#### PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in diff erent versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。

寿命长达5万小时,光衰小、减少后期维护费用。

灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。

灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 高透光扩散型控光罩,出光均匀,防炫效果好

应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP2017-450PM-S	D450*H17mm	30W	7200Lm	3300Lm
XP2017-600PM-S	D600*H17mm	40W	9600Lm	4400Lm
XP2017-900PM-S	D900*H17mm	60W	14400Lm	6600Lm



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP2017-450PMU-S	D450*H17mm	45W	10600Lm	4950Lm
XP2017-600PMU-S	D600*H17mm	60W	14400Lm	6600Lm
XP2017-900PMU-S	D900*H17mm	90W	21600Lm	9900Lm

#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None



#### ROD SUSPENDED / PRISMATIC DIFFUSER

吊杆安装/棱晶防眩罩

































#### PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in diff erent versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。

寿命长达5万小时,光衰小、减少后期维护费用。

灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。

灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 高透光扩散型控光罩,出光均匀,防炫效果好

应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数



60W

14400I m

21600Lm

6600Lm

9900Lm

D600\*H17mm

#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI S Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□None

XP2017-600PMU-R

XP2017-900PMU-R



SURFACED / PRISMATIC DIFFUSER

吸顶/棱晶防眩罩































#### PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in diff erent versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。

寿命长达5万小时,光衰小、减少后期维护费用。

灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 高透光扩散型控光罩,出光均匀,防炫效果好应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数





#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□None







## FLUSH CEILING

Flush-mounted ceiling luminaires provide a clean, modern appearance, sitting just 1 mm from the ceiling.

They offer uniform illumination while maintaining a minimalist, seamless integration with the architecture — ideal for spaces that demand both functionality and design elegance.

GAP: 1MM



PRISMATIC DIFFUSER

棱晶防眩罩





























#### PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。

寿命长达5万小时,光衰小、减少后期维护费用。 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。

灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 高透光扩散型控光罩,出光均匀,防炫效果好

应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP1826-450	D450*H26mm	30W	5100Lm	3000Lm
XP1826-600	D600*H26mm	40W	6800Lm	4000Lm
XP1826-900	D900*H26mm	60W	10200Lm	6000Lm

#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI S Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□None



Novo Nordisk Offices | Architecture: FMZ Arquitectura | Lighting Design: Docevolts Francisca Nicoletti.




## **ULTRA THIN**

极致超薄





#### **DIMENSION OPTIONS**

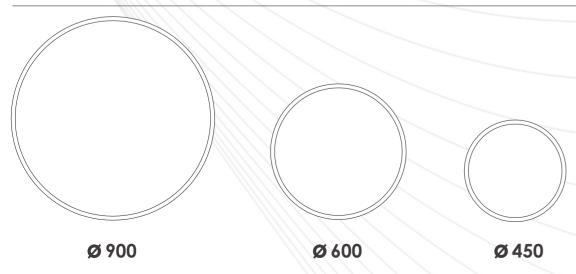

### MOUNTING OPTIONS





#### **SP27**

Square Frameless 无边框



























#### PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in diff erent versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。

寿命长达5万小时,光衰小、减少后期维护费用。


灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。

灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。

高透光扩散型控光罩, 出光均匀, 防炫效果好

应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


#### TECHNICAL DATA 技术参数



#### PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□None


#### **DIMENSION OPTIONS**

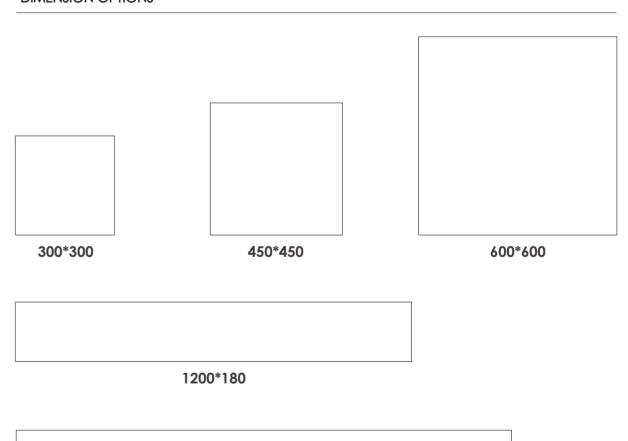

1500\*180



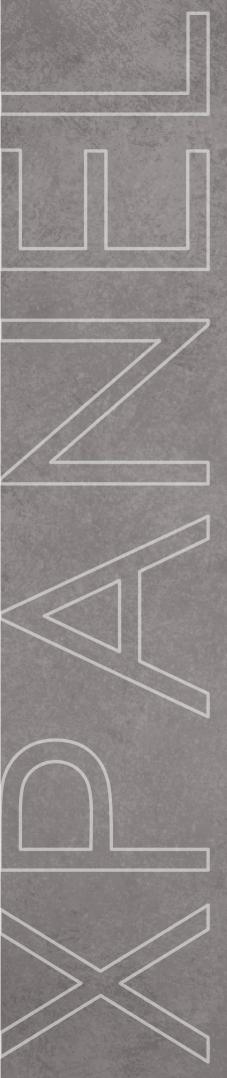

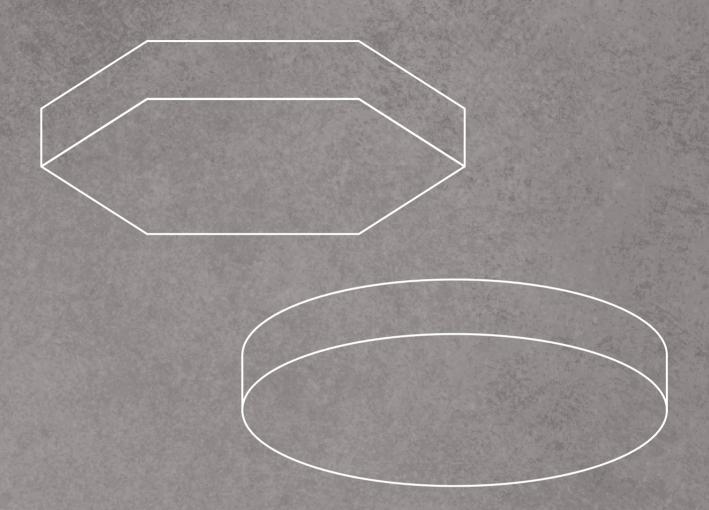

## XPANEL SERIES

SUSPENDED / SURFACE

## **XPANEL SERIES**

#### LED PANEL SURFACE | SUSPENDED

The XPANEL series offers circular and hexagonal LED panels in different sizes, designed with a thicker profile that delivers a higher luminous output.

Suitable for suspended or surface mounting, they are the perfect choice for projects with technical requirements and for large or high-ceiling spaces where powerful and efficient lighting is essential. Beyond functionality, XPANEL luminaires also become architectural features, adding character and presence to every environment — a fusion of light and design that elevates spaces with elegance and strength.





MK Oulet Showroom. Lighting Design: Luz + Diseño - Gaspar Arenas.



## **TRIMLESS**

This frameless panel differs from traditional LED panels with wide frame edges. When illuminated, the frame becomes invisible, achieving a seamless integration with the ceiling.

Equipped with a high-efficiency LGP (Light Guide Plate) and a PMMA (Polymethyl Methacrylate) diffuser, it delivers a luminous output that is even and uniform, bringing comfort and elegance to every project.



62

Round Frameless 无边框





























#### PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in diff erent versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy effi ciently, while maintaining  $\boldsymbol{\alpha}$ clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。

寿命长达5万小时,光衰小、减少后期维护费用。 好即於公切小时,允易小、佩罗伯斯维斯·安阳。 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 高透光扩散型控光罩,出光均匀,防炫效果好 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP27-300	D300*H27mm	24W	4590Lm	2400Lm
XP27-450	D450*H27mm	36W	6840Lm	3600Lm
XP27-600	D600*H27mm	48W	9180Lm	4800Lm

#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None

#### **DIMENSION OPTIONS**

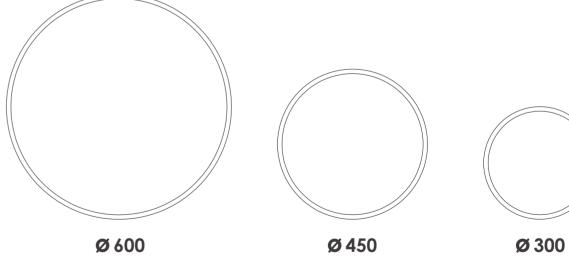





OPAL DIFFUSER 120LM/W

> 乳白亚克力罩 120流明/瓦

## **FLEXIBILITY**

#### IN APPLICATION

- Available in different versions and LED performance classes.
- Choose the translucent cover for uniform illumination.
- Select the microprismatic variant for glare-free office lighting with an optimum UGR <19.</li>
- Particularly in large-scale projects, this wide range of options provides significant advantages: different room concepts can be implemented cost-effectively and energy-efficiently, while maintaining a clean and consistent design style.

MICROPRISMATIC COVER 棱晶防眩罩

Also available with Microprismarit cover

#### GLARE FREE

UGR < 19 无眩光 眩光值小于19

MOUNTING OPTIONS 安装方式

WALL CEILING CABLE SUSPENDED CABLE SUSPENDED ROD SUSPENDED

56



## **SURFACED**

- Round luminaire with a seamless, powder-coated aluminum housing.
- Quick, tool-free mounting system.
- Equipped with energy-efficient LEDs and excellent color rendering.
- Provides uniform, homogeneous illumination.
- Available with direct or direct/indirect light distribution, using satinized or microprismatic PMMA covers.



CEN Offices | Lighting Design: Diseño de Luz. | Architecture: Jorge Iglesis. | Interior Design:OArquitectos.

# XP62P

OPAL DIFFUSER

亚克力罩

























# PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in diff erent versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。 寿命长达5万小时,光衰小、减少后期维护费用。 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 高透光扩散型控光罩,出光均匀,防炫效果好 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP62P-450	D450*H62mm	30W	5400Lm	3300Lm
XP62P-600	D600*H62mm	40W	6800Lm	4800Lm
XP62P-900	D900*H62mm	60W	10200Lm	7200Lm
XP62P-1200	D1200*H62mm	80W	13600Lm	9600Lm



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP62PU-450	D600*H62mm	45W	7690Lm	5000Lm
XP62PU-600	D600*H62mm	60W	10200Lm	7200Lm
XP62PU-900	D900*H62mm	90W	15300Lm	10800Lm
XP62PU-1200	D1200*H62mm	120W	20400Lm	14400Lm



# XP62PM

# PRISMATIC DIFFUSER **UGR<19**



























# PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。

寿命长达5万小时,光衰小、减少后期维护费用。

灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。

高透光扩散型控光罩,出光均匀,防炫效果好

应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP62PM-450	D450*H62mm	30W	5400Lm	3300Lm
XP62PM-600	D600*H62mm	40W	6800Lm	4800Lm
XP62PM-900	D900*H62mm	60W	10200Lm	7200Lm
XP62PM-1200	D1200*H62mm	80W	13600Lm	9600Lm



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP62PMU-450	D600*H62mm	45W	7690Lm	5000Lm
XP62PMU-600	D600*H62mm	60W	10200Lm	7200Lm
XP62PMU-900	D900*H62mm	90W	15300Lm	10800Lm
XP62PMU-1200	D1200*H62mm	120W	20400Lm	14400Lm



IGS Group Offices | Architecture: Elton y Leniz Arquitectos. | Lighting Design: LEVO Studio.



# XP105P

OPAL DIFFUSER



























# PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。

寿命长达5万小时,光衰小、减少后期维护费用。

灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。

灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 高透光扩散型控光罩,出光均匀,防炫效果好

应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP105P-450	D450*H62mm	30W	5400Lm	3300Lm
XP105P-600	D600*H62mm	40W	6800Lm	4800Lm
XP105P-900	D900*H62mm	60W	10200Lm	7200Lm
XP105P-1200	D1200*H62mm	80W	13600Lm	9600Lm



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP105PU-450	D600*H62mm	45W	7690Lm	5000Lm
XP105PU-600	D600*H62mm	60W	10200Lm	7200Lm
XP105PU-900	D900*H62mm	90W	15300Lm	10800Lm
XP105PU-1200	D1200*H62mm	120W	20400Lm	14400Lm



Rosen Showroom | Lighting Design: Luxia.



# XP105PM

# PRISMATIC DIFFUSER UGR<19

棱晶防眩罩 眩光值<19





























# PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in diff erent versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。

寿命长达5万小时,光衰小、减少后期维护费用。


发时式25万小时,尤较小、减少后期推扩资用。 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 高透光扩散型控光罩,出光均匀,防炫效果好 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP105PM-450	D450*H62mm	30W	5400Lm	3300Lm
XP105PM-600	D600*H62mm	40W	6800Lm	4800Lm
XP105PM-900	D900*H62mm	60W	10200Lm	7200Lm
XP105PM-1200	D1200*H62mm	80W	13600Lm	9600Lm



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP105PMU-450	D600*H62mm	45W	7690Lm	5000Lm
XP105PMU-600	D600*H62mm	60W	10200Lm	7200Lm
XP105PMU-900	D900*H62mm	90W	15300Lm	10800Lm
XP105PMU-1200	D1200*H62mm	120W	20400Lm	14400Lm

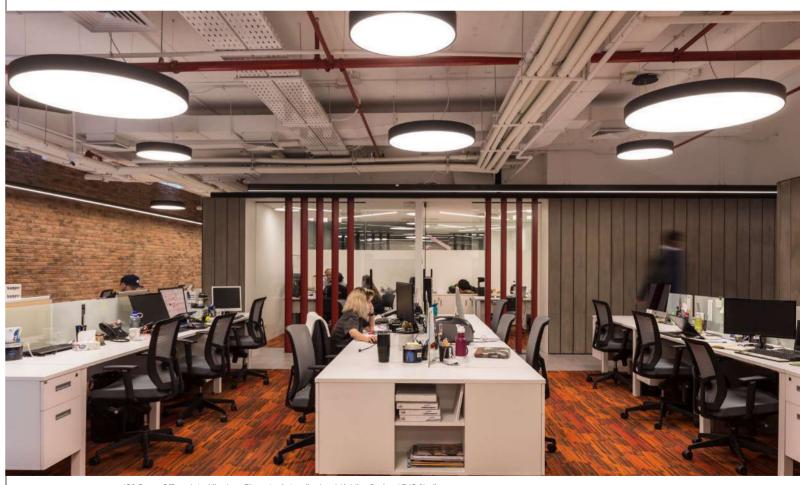

IGS Group Offices | Architecture: Elton y Leniz Arquitectos. | Lighting Design: LEVO Studio.



# XP65P

OPAL DIFFUSER 亚克力罩

























# PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in diff erent versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。

寿命长达5万小时,光衰小、减少后期维护费用。

好即吃20万小时,无家小、碗少后期往开发用。 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 高透光扩散型控光罩,出光均匀,防炫效果好 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。



Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
D450*H65mm	30W	5400Lm	3300Lm
D600*H65mm	40W	6800Lm	4800Lm
D900*H65mm	60W	10200Lm	7200Lm
D1200*H65mm	80W	13600Lm	9600Lm
	D450*H65mm D600*H65mm D900*H65mm	D450*H65mm         30W           D600*H65mm         40W           D900*H65mm         60W	D450*H65mm         30W         5400Lm           D600*H65mm         40W         6800Lm           D900*H65mm         60W         10200Lm



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP65PU-450	D600*H65mm	45W	7690Lm	5000Lm
XP65PU-600	D600*H65mm	60W	10200Lm	7200Lm
XP65PU-900	D900*H65mm	90W	15300Lm	10800Lm
XP65PU-1200	D1200*H65mm	120W	20400Lm	14400Lm



# XP65PM

# PRISMATIC DIFFUSER **UGR<19**

棱晶防眩罩



























# PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in diff erent versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。 寿命长达5万小时,光衰小、减少后期维护费用。 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。

灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 高透光扩散型控光罩,出光均匀,防炫效果好

应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP65PM-450	D450*H65mm	30W	5400Lm	3300Lm
XP65PM-600	D600*H65mm	40W	6800Lm	4800Lm
XP65PM-900	D900*H65mm	60W	10200Lm	7200Lm
XP65PM-1200	D1200*H65mm	80W	13600Lm	9600Lm



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP65PMU-450	D600*H65mm	45W	7690Lm	5000Lm
XP65PMU-600	D600*H65mm	60W	10200Lm	7200Lm
XP65PMU-900	D900*H65mm	90W	15300Lm	10800Lm
XP65PMU-1200	D1200*H65mm	120W	20400Lm	14400Lm







# HEXAGON 六边形

**OPAL DIFFUSER** 

亚克力罩



**PRISMATIC DIFFUSER** 

防眩光棱晶罩



吸音板



# XH105P

OPAL DIFFUSER 亚克力罩

























# PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in diff erent versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。

有命长达5万小时,光衰小、减少后期维护费用。 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 高透光扩散型控光罩,出光均匀,防炫效果好

应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

# TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XH105PM-600	W600*H105mm	40W	6800Lm	4800Lm
XH105PM-900	W900*H105mm	60W	10200Lm	7200Lm
XH105PM-1200	W1200*H105mm	80W	13600Lm	9600Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XH105PMU-600	W600*H105mm	60W	10200Lm	7200Lm
XH105PMU-900	W900*H105mm	90W	15300Lm	10800Lm
XH105PMU-1200	W1200*H105mm	120W	20400Lm	14400Lm

# PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor



# XH105PM

# PRISMATIC DIFFUSER

防眩棱晶罩

























# PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment;

Available in diff erent versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保S年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。

寿命长达5万小时,光衰小、减少后期维护费用。 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。

灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 高透光扩散型控光罩,出光均匀,防炫效果好

应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

# TECHNICAL DATA 技术参数



	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
7	XH105PM-600	W600*H105mm	40W	6800Lm	4800Lm
	XH105PM-900	W900*H105mm	60W	10200Lm	7200Lm
7	XH105PM-1200	W1200*H105mm	80W	13600Lm	9600Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XH105PMU-600	W600*H105mm	60W	10200Lm	7200Lm
XH105PMU-900	W900*H105mm	90W	15300Lm	10800Lm
XH105PMU-1200	W1200*H105mm	120W	20400Lm	14400Lm


#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor



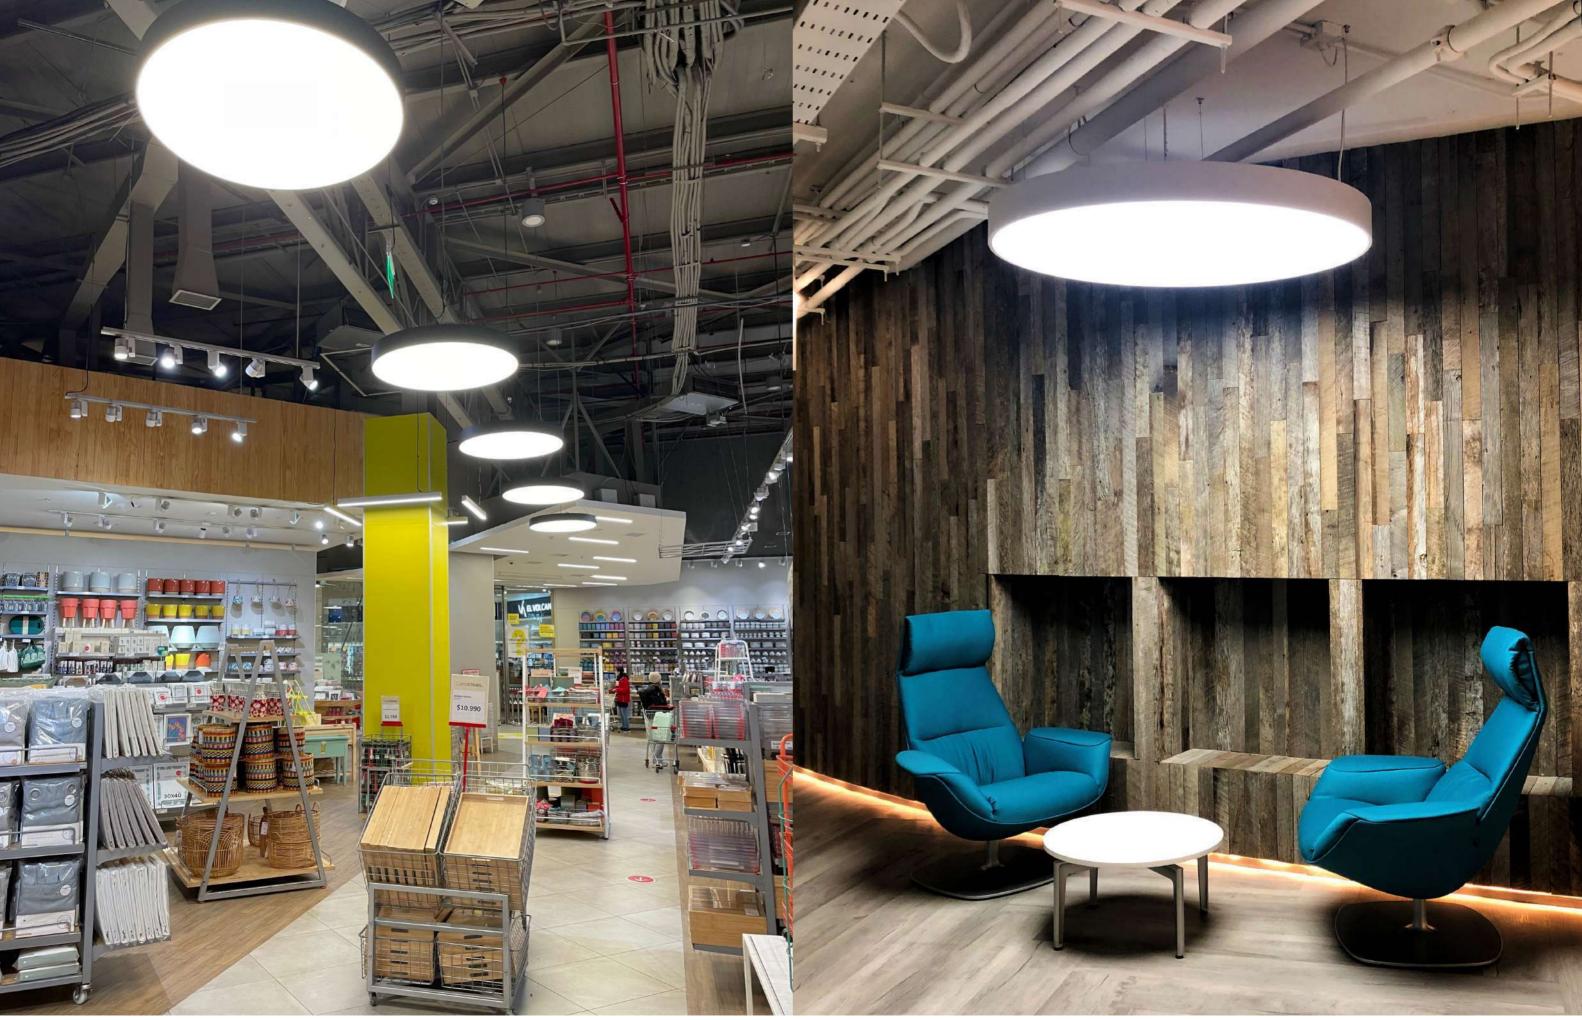



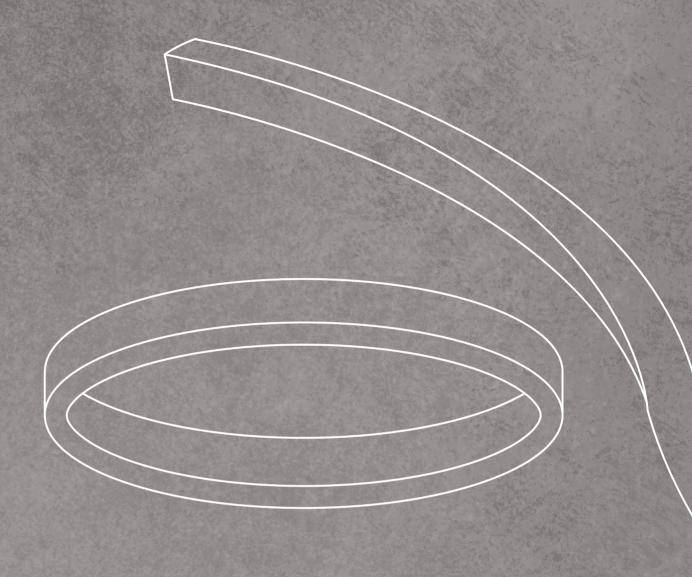

# XCURVE XRING SERIES

SUSPENDED | SURFACE | RECESSED


# XCURVE & XRING SERIES

LED RING & CURVE SURFACE | SUSPENDED | RECESSED

Inspired by nature and its organic forms, XCURVE & XRING offer designers a versatile tool to create freely, combining straight lines, curves, and circular shapes that integrate seamlessly with architecture and interior design.

With refined finishes and a perfect balance between technical performance and decorative appeal, this series opens the door to endless design possibilities. Available with direct or indirect lighting, and ranging from compact sizes to impressive diameters of up to 5 meters, these luminaires can be used individually or combined to achieve unique compositions.


The result is lighting that brings sophistication, functionality, and character to any space, transforming projects into experiences where architecture and light converge in harmony.

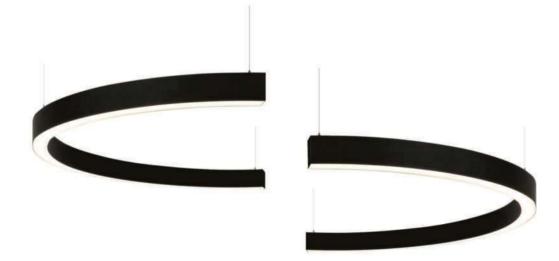



92

# DESIGN POSSIBILITIES Free your creativity

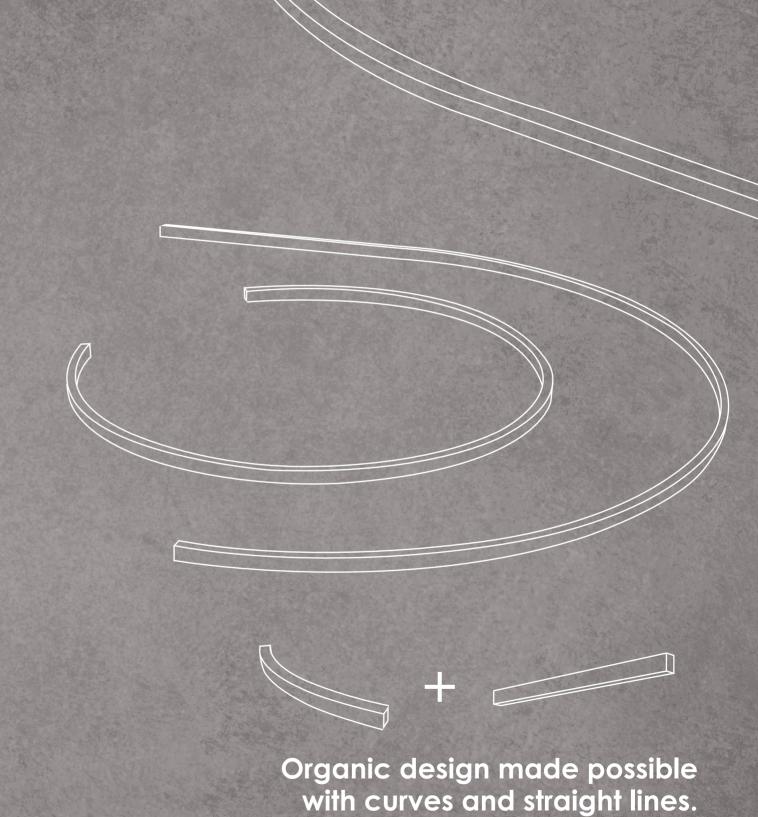





WHITE FRAME + BLACK TRIM



WHITE FRAME + ORANGE TRIM




GREY FRAME + ORANGE TRIM



BLACK FRAME + BLACK TRIM



CIRCULAR RING 圆环

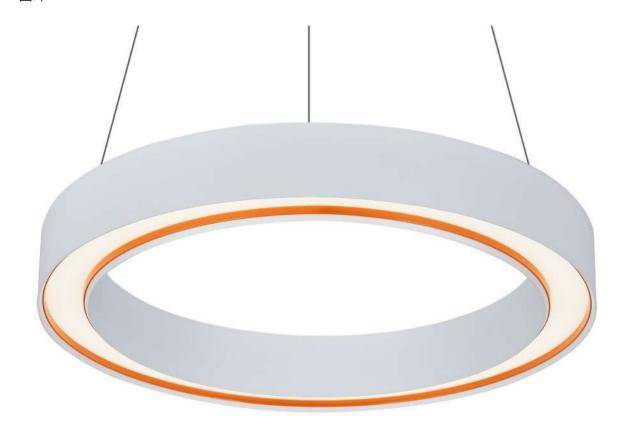























# PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.  $\cdot$  Long lifespan up to 50000hours, low decay and low maintanence cost.
- · High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- $\cdot \ \mathsf{High\ efficiency\ PC\ and\ even\ light\ .} distribution, no\ shawdon, anti-glare$ feature, easy installation to any shape.
- · Application: Office, School, Hospital, Supermarket, Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR5580-605	605*55*80mm(2FT)	30W	5100Lm	3000Lm
XR5580-905	905*55*80mm(3FT)	40W	6800Lm	4000Lm
XR5580-1205	1205*55*80mm(4FT)	60W	10200Lm	6000Lm
XR5580-1505	1505*55*80mm(5FT)	95W	16150Lm	9500Lm
XR5580-2005	2005*55*80mm(7FT)	125W	21250Lm	12500Lm
XR5580-2405	2405*55*80mm(8FT)	150W	25500Lm	15000Lm
XR5580-3005	3005*55*80mm(10FT)	190W	32300Lm	19000Lm
XR5580-4005	4005*55*80mm(10FT)	252W	42700Lm	25200Lm
XR5580-5005	5005*55*80mm(16FT)	315W	53550Lm	31500Lm
XR5580-10005	10000*55*80mm(32FT)	620W	10540Lm	62000Lm
Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR5580-605	605*55*80mm(2FT)	30W	5100Lm	3000Lm
XR5580-905	905*55*80mm(3FT)	40W	6800Lm	4000Lm
XR5580-1205	1205*55*80mm(4FT)	60W	10200Lm	6000Lm

9.5W

125W

190W

315W

1505\*55\*80mm(5FT)

2005\*55\*80mm(7FT)

2405\*55\*80mm(8FT)

3005\*55\*80mm(10FT)

5005\*55\*80mm(16FT)

4005\*55\*80mm(10FT) 252W

10000\*55\*80mm(32FT) 620W

16150Lm

21250Lm

25500Lm

32300Lm

42700Lm

53550Lm

10540Lm

9500Lm

12500Lm

15000Lm

19000Lm

25200Lm

31500Lm

62000Lm

# PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

XR5580-1505

XR5580-2005


XR5580-2405

XR5580-3005

XR5580-4005

XR5580-5005

XR5580-10005

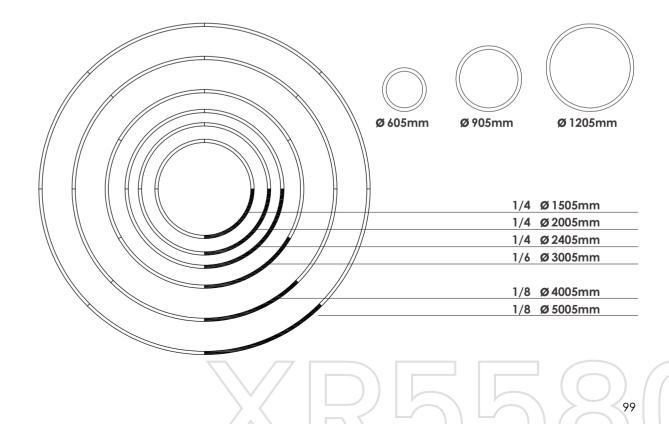



CIRCULAR RING

























# PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- $\cdot$  Long lifespan up to 50000hours, low decay and low maintanence cost.
- · High grade aluminum, high quality surface painting. Fast and easy connection with no shadow.
- $\cdot \ \mbox{High efficiency PC and even light . distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application: Office, School, Hospital, Supermarket, Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数

Г	٦	
П	1	
L	┙	
		k


Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR5070-600	600*50*70mm(2FT)	30W	5100Lm	3000Lm
XR5070-900	900*50*70mm(3FT)	40W	6800Lm	4000Lm
XR5070-1200	1200*50*70mm(4FT)	60W	10200Lm	6000Lm
XR5070-1500	1500*50*70mm(5FT)	95W	16150Lm	9500Lm
XR5070-2000	2000*50*70mm(7FT)	125W	21250Lm	12500Lm
XR5070-2400	2400*50*70mm(8FT)	150W	25500Lm	15000Lm
XR5070-3000	3000*50*70mm(10FT)	190W	32300Lm	19000Lm
XR5070-4000	4000*50*70mm(10FT)	190W	42700Lm	25200Lm
XR5070-5000	5000*50*70mm(16FT)	315W	53550Lm	31500Lm
XR5070-10000	10000*50*70mm(32FT)	620W	10540Lm	62000Lm



ltem No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR5070-600	600*50*70mm(2FT)	30W	5100Lm	3000Lm
XR5070-900	900*50*70mm(3FT)	40W	6800Lm	4000Lm
XR5070-1200	1200*50*70mm(4FT)	60W	10200Lm	6000Lm
XR5070-1500	1500*50*70mm(5FT)	95W	16150Lm	9500Lm
XR5070-2000	2000*50*70mm(7FT)	125W	21250Lm	12500Lm
XR5070-2400	2400*50*70mm(8FT)	150W	25500Lm	15000Lm
XR5070-3000	3000*50*70mm(10FT)	190W	32300Lm	19000Lm
XR5070-4000	4000*50*70mm(10FT)	190W	42700Lm	25200Lm
XR5070-5000	5000*50*70mm(16FT)	315W	53550Lm	31500Lm
XR5070-10000	10000*50*70mm(32FT)	620W	10540Lm	62000Lm

# PRODUCT OPTION 可选产品配置

	CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
	CRI	□ 82+ □ 90+ □ 95+
	Finish	□ White ■ Black ■ Silver ■ Custom Color
	Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
	Emergency	□ None □ 1.5 hours, half power
Π	Sensor	□ None □ Motion and daylight sensor

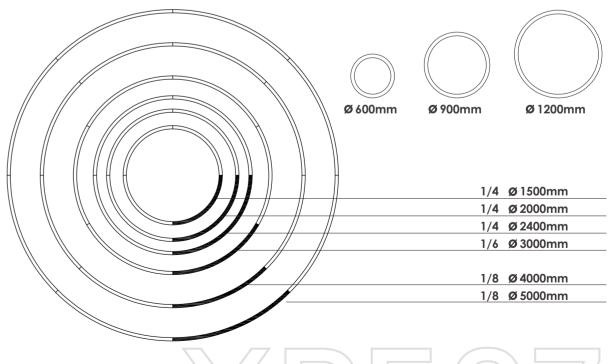



CIRCULAR RING 圆环



























- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · High grade aluminum, high quality surface painting.
- Fast and easy connection with no shadow.

PRODUCT FEATURE 产品特点

- $\cdot \ \mbox{High efficiency PC and even light . distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application: Office, School, Hospital, Supermarket, Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配
- 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


#### TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR3535-600	600*35*35mm(2FT)	30W	5100Lm	1500Lm
XR3535-900	900*35*35mm(3FT)	40W	6800Lm	2000Lm
XR3535-1200	1200*35*35mm(4FT)	60W	10200Lm	3000Lm
XR3535-1500	1485*35*35mm(5FT)	95W	16150Lm	4750Lm
XR3535-2000	1985*35*35mm(7FT)	125W	21250Lm	6250Lm
XR3535-2400	2385*35*35mm(8FT)	150W	25500Lm	7500Lm
XR3535-3000	2985*35*35mm(10FT)	190W	32300Lm	9500Lm
XR3535-5000	4985*35*35mm(16FT)	315W	53550Lm	15750Lm
XR3535-10000	9985*35*35mm(32FT)	620W	10540Lm	31000Lm


# PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

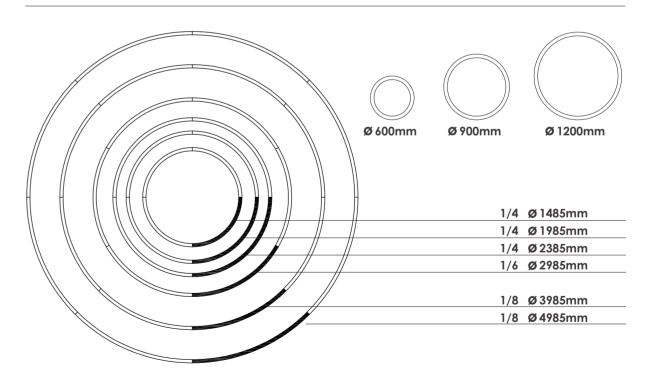



CIRCULAR RING 圆环

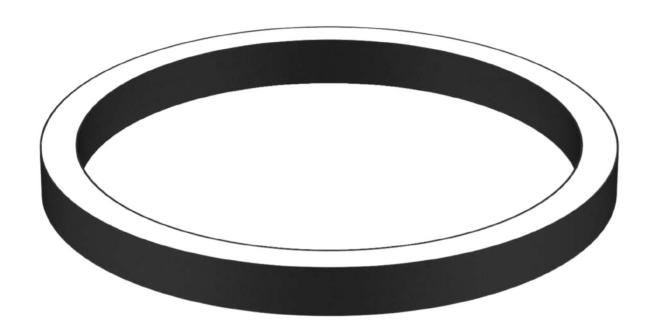























# PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost. · High grade aluminum, high quality surface painting.
- Fast and easy connection with no shadow.
- $\cdot \ \mbox{High efficiency PC and even light . distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application: Office, School, Hospital, Supermarket, Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


#### TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR6080-610	610*60*80mm(2FT)	30W	5100Lm	3000Lm
XR6080-910	910*60*80mm(3FT)	40W	6800Lm	4000Lm
XR6080-1210	1210*60*80mm(4FT)	60W	10200Lm	6000Lm
XR6080-1510	1510*60*80mm(5FT)	95W	16150Lm	9500Lm
XR6080-2010	2010*60*80mm(7FT)	125W	21250Lm	12500Lm
XR6080-2410	2410*60*80mm(8FT)	150W	25500Lm	15000Lm
XR6080-3010	3010*60*80mm(10FT)	190W	32300Lm	19000Lm
XR6080-4010	4010*60*80mm(10FT)	252W	42700Lm	25200Lm
XR6080-5010	5010*60*80mm(16FT)	315W	53550Lm	31500Lm
XR6080-10010	10010*60*80mm(32FT)	620W	10540Lm	62000Lm

# PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

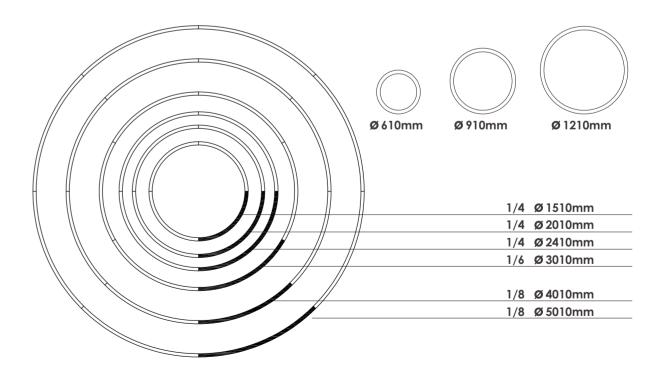




# XR6080IN

INSIDE LITE/CIRCULAR RING

内发光/圆环

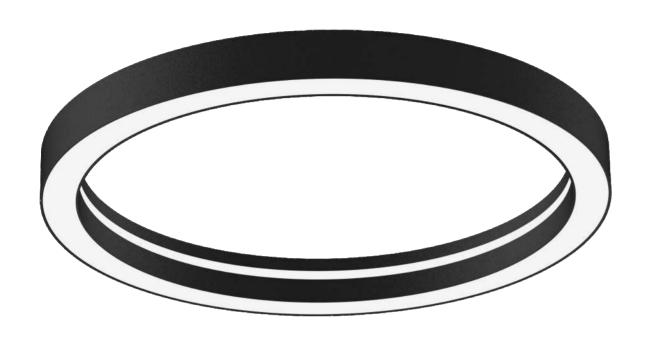

























# PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- $\cdot$  Long lifespan up to 50000hours, low decay and low maintanence cost. · High grade aluminum, high quality surface painting.
- Fast and easy connection with no shadow.
- $\cdot \ \mbox{High efficiency PC and even light . distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application: Office, School, Hospital, Supermarket, Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


#### TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR6080IN-610	610*60*80mm(2FT)	30W	5100Lm	3000Lm
XR6080IN-910	910*60*80mm(3FT)	40W	6800Lm	4000Lm
XR6080IN-1210	1210*60*80mm(4FT)	60W	10200Lm	6000Lm
XR6080IN-1510	1510*60*80mm(5FT)	95W	16150Lm	9500Lm
XR6080IN-2010	2010*60*80mm(7FT)	125W	21250Lm	12500Lm
XR6080IN-2410	2410*60*80mm(8FT)	150W	25500Lm	15000Lm
XR6080IN-3010	3010*60*80mm(10FT)	190W	32300Lm	19000Lm
XR6080IN-4010	4010*60*80mm(10FT)	252W	42700Lm	25200Lm
XR6080IN-5010	5010*60*80mm(16FT)	315W	53550Lm	31500Lm
XR6080IN-10010	10010*60*80mm(32FT)	620W	10540Lm	62000Lm

# PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI • Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

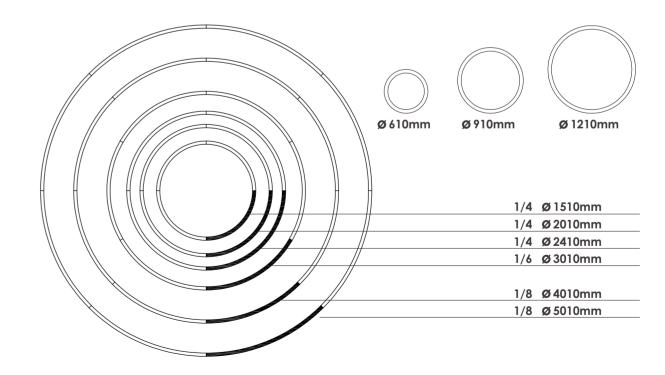







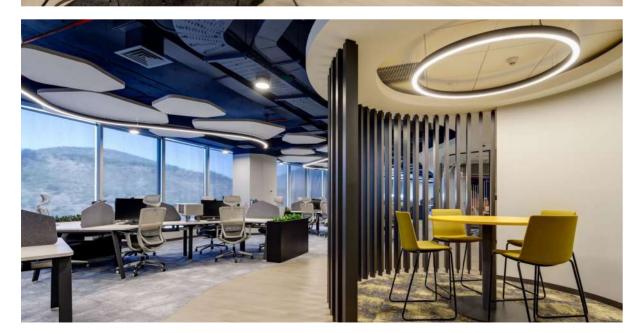






Murex Offices | Architecture and Lighting Design: Collective Architecture.

# RECESSED CIRCULAR RING

嵌入式圆环

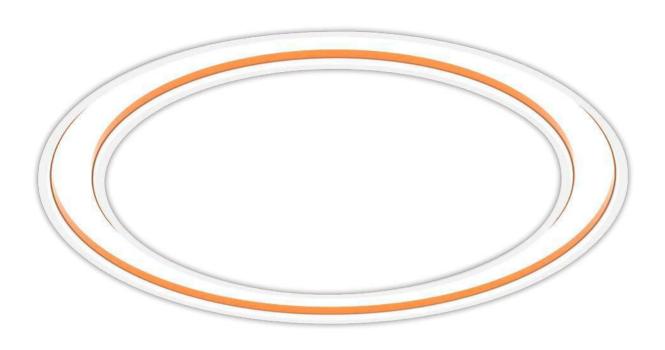

























- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · High grade aluminum, high quality surface painting. Fast and easy connection with no shadow.
- $\cdot \ \mbox{High efficiency PC and even light . distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application: Office, School, Hospital, Supermarket, Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


#### TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR7042-620	620*70*42mm	30W	5100Lm	1500Lm
XR7042-920	920*70*42mm	40W	6800Lm	2000Lm
XR7042-1220	1220*70*42mm	60W	10200Lm	3000Lm
XR7042-1520	1520*70*42mm	95W	16150Lm	4750Lm
XR7042-2020	2020*70*42mm	125W	21250Lm	6250Lm
XR7042-2420	2420*70*42mm	150W	25500Lm	7500Lm
XR7042-3000	3020*70*42mm	190W	32300Lm	9500Lm
XR7042-4000	4020*70*42mm	252W	42700Lm	12600Lm
XR7042-5000	5020*70*42mm	315W	53550Lm	15750Lm
XR7042-10000	10020*70*42m	620W	10540Lm	31000Lm

#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI S Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

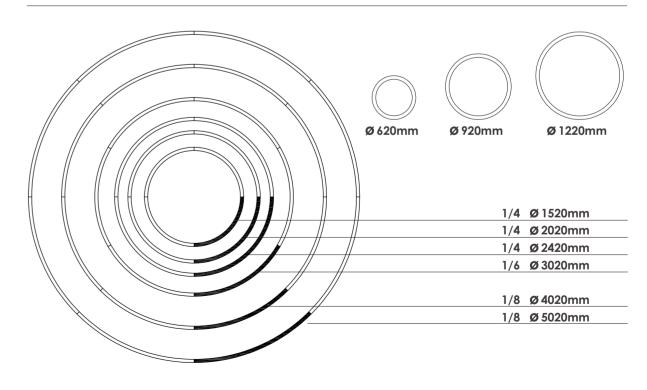





# OPTICS CURVE

- Patented oval lens reflector design for superior light control.
- Multiple solutions available to meet different project requirements.
- DIY flexibility allows clients to customize and choose according to their needs.
- High-efficiency light distribution with no shadows and anti-glare performance.
- Can be configured as curves, circles, or straight lines.
- Easily connected to form custom shapes as requested.

**08**Color Options

Color Opilors

**05** Size Options 03

**Dimming Options** 

02


Mounting Options

116



# 3870L2

LENS 透镜

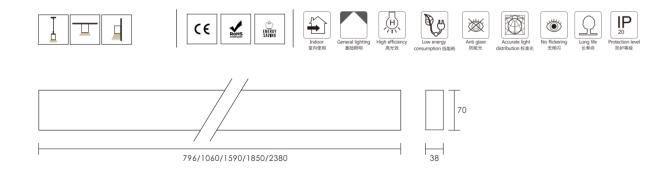

# PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
  Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- Fast and easy connection with no shadow.
- $\cdot \mbox{ High efficiency PC and even light distribution,} no shawdon, anti-glare feature, easy installation to any shape.}$
- $\cdot \mbox{ Application:} Office, School, Hospital, Supermartket, Shopping Mall, Hotel, Public Area$
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DALI调光、调色温驱动电源。
- T-TOV順光、DALI順光、順巴温驱动电源。 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

# TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
L\$3870L2-1060	1060*38*70mm	24W	4080Lm	2160Lm
LS3870L2-1590	1590*38*70mm	36W	6120Lm	3240Lm
LS3870L2-1850	1850*38*70mm	40W	6800Lm	3600Lm
LS3870L2-2380	2112*38*70mm	48W	8160Lm	4320Lm


#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor


#### LIGHT DISTRIBUTION CURVE 光强分布曲线




#### Accessories 配件

















# **UGR < 19**

- Patented oval lens reflector design for precise light control.
- Multiple solutions available to meet diverse project requirements.
- DIY flexibility allows clients to customize and select according to their needs.
- High-efficiency light distribution with no shadows and anti-glare performance (UGR <19).
- Configurable as curves, circles, or straight lines.
- Easily connected to form custom shapes as requested.

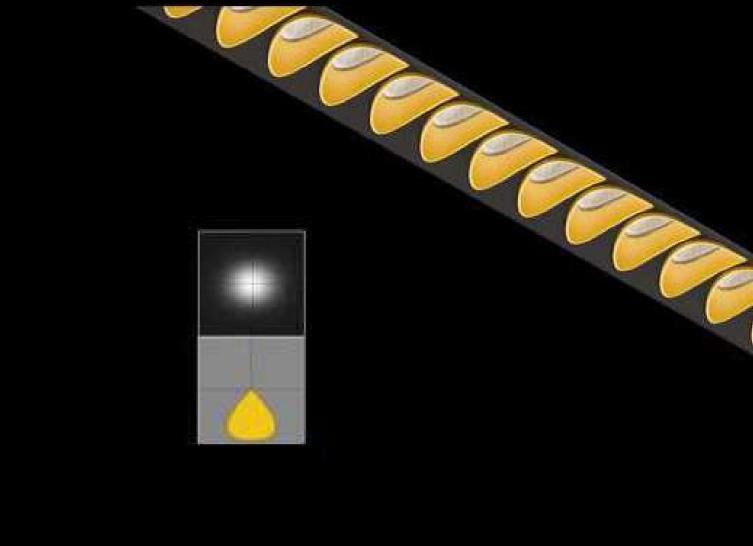

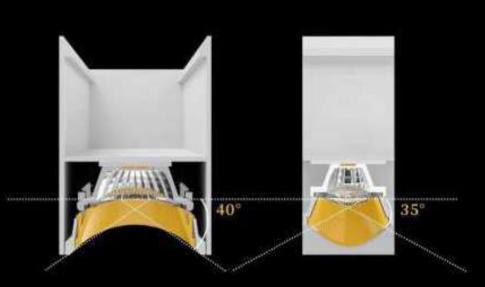

CIRCULAR RING





























# PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- $\cdot$  Long lifespan up to 50000hours, low decay and low maintanence cost.
- · High grade aluminum, high quality surface painting.
- Fast and easy connection with no shadow.
- $\cdot \ \mathsf{High\ efficiency\ PC\ and\ even\ light\ .} distribution, no\ shawdon, anti-glare$ feature, easy installation to any shape.
- · Application: Office, School, Hospital, Supermarket, Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

# TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR3870-300	300*38*70mm	18W	3060Lm	1500Lm
XR3870-450	450*38*70mm	24W	4080Lm	2160Lm
XR3870-650	650*38*70mm	40W	5400Lm	3600Lm
XR3870-900	900*38*70mm	60W	10200Lm	5400Lm
XR3870-1200	1200*38*70mm	72W	12240Lm	6480Lm
Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR3870U-300	300*38*70mm	27W	4590Lm	2430Lm
XR3870U-450	450*38*70mm	36W	6120Lm	3240Lm
XR3870U-650	650*38*70mm	60W	10200Lm	5400Lm
XR3870U-900	900*38*70mm	90W	15300Lm	8100Lm



CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI • Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

XR3870U-1200

1200\*38\*70mm

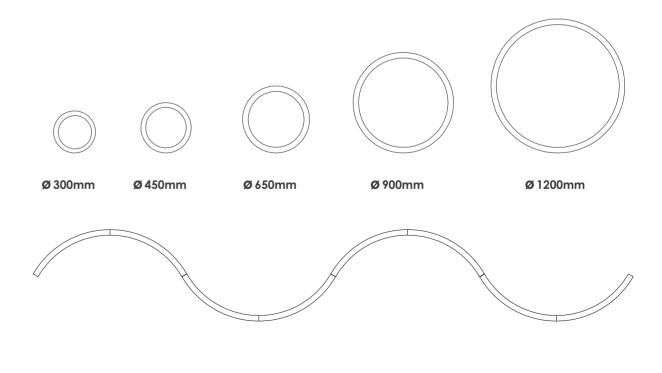











1. Pastelería JO | Interiors and Lighting Design: Bassi Design | 2. BNP Paribas Cardif | Architecture and Lighting Design: Grupo E.
3. BLCK COFFE AND BAR: Architecture and Interiors: Dual Arquitectas. | 4. BCI PAGOS Office. Architecture and Lighting Design: Collective Architecture.







Indura Offices | Architecture: Armas Elton Arquitectos. | Lighting Design: Diseño de Luz.
















ISA ENERGIA Offices. Architecture and Construction: CASBRO.

<sup>1 - 2.</sup> Golden Oak Offices | Architecture and Lighting Design: Espiral Arquitectos. | 3. MK Offices | Architecture and Lighting Design: OArquitectos. 4 - 5. ISA ENERGIA Offices | Architecture and Construction: CASBRO.

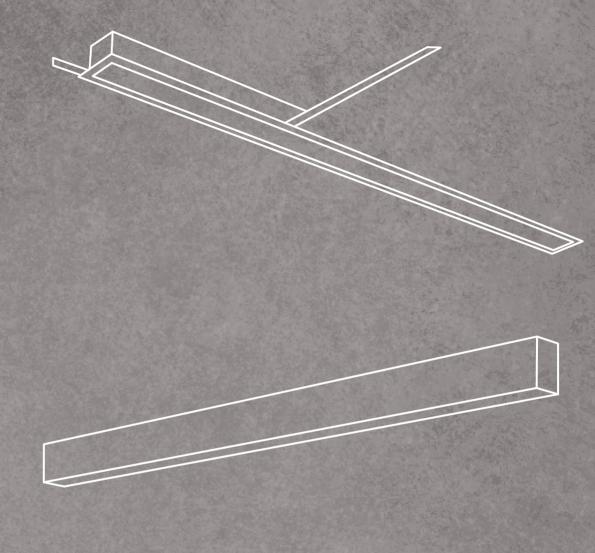

# XLINE SERIES

SUSPENDED | SURFACE | RECESSED

# **XLINE SERIES**

SURFACE | SUSPENDED

Elegant and versatile, XLINE in its surface and suspended version redefines architectural lighting with clean lines and refined performance. Designed in aluminum profiles with an integrated electronic driver, it offers multiple possibilities: opal or microprismatic diffusers, Eurostandard three-phase track electrification, or optical modules for focal lighting. A system where technical precision meets contemporary aesthetics, delivering powerful light while offering creative freedom to enhance interior architecture.

Its strength lies in flexibility: it can be used as a stand-alone luminaire or as part of a continuous line system, achieving high luminous levels and varied lighting effects. Thanks to its different connectors, XLINE also enables the creation of geometric shapes and unique compositions, transforming light into a creative tool for design and architecture.

More than a lighting profile, XLINE is a professional solution that combines efficiency, performance, and design versatility for projects that demand the best.







# FAST CONNECTION

This system redefines simplicity with an effortless fast-connection technology. Its innovative slide-in and slide-out mechanism eliminates the need for screws and complex assembly, enabling a seamless plug-and-play installation that reduces setup time by up to 70% compared to traditional systems.

# TOOL FREE

Designed for true convenience, the intuitive, tool-free system allows fixtures to snap into place effortlessly—no tools, no wiring complexity, and no technical expertise required. It brings speed, flexibility, and precision to every lighting configuration.

# ONE CLICK


Engineered for secure and reliable performance, each module connects through an interlocking mechanism with a single click. This ensures perfect alignment, structural stability, and safe handling during installation.

# NO LIGHT LEAKAGE

A refined connection system prevents light from escaping sideways, creating a continuous and uniform line of illumination. It enhances visual comfort and preserves the elegance of every space.

All these features make this system ideal for rapid customization across residential, commercial, and event lighting environments. Perfect for projects that demand speed, precision, and sophistication, it is also a premium choice for high-end architectural applications.



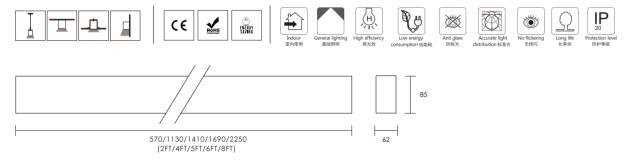

# PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

# TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6285P-600	570*62*85MM	18W	3060Lm	1800Lm
LS6285P-1200	1130*62*85MM	36W	6120Lm	3600Lm
LS6285P-1400	1400*62*85MM	45W	7650Lm	4500Lm
LS6285P-1800	1690*62*85MM	54W	9180Lm	5400Lm
LS6285P-2400	2250*62*85MM	72W	12240Lm	7200Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6285PU-600	570*62*85MM	27W	4590Lm	2700Lm
LS6285PU-1200	1130*62*85MM	54W	9180Lm	5400Lm
LS6285PU-1400	1400*62*85MM	63W	10710Lm	6300Lm
LS6285PU-1800	1690*62*85MM	81W	13770Lm	8100Lm
LS6285PU-2400	2250*62*85MM	108W	18360Lm	10800Lm


# PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

# LIGHT DISTRIBUTION CURVE 光强分布曲线







# CONTINUOUS 连接件

180° Extender 直连接件

T Shape Corner

T字形连接件




L Shape Corner L字形连接件



X Shape Corner 十字形连接件

# DETAIL 细节





#### Accessories 配件

















proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

<sup>\*</sup>For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively prope

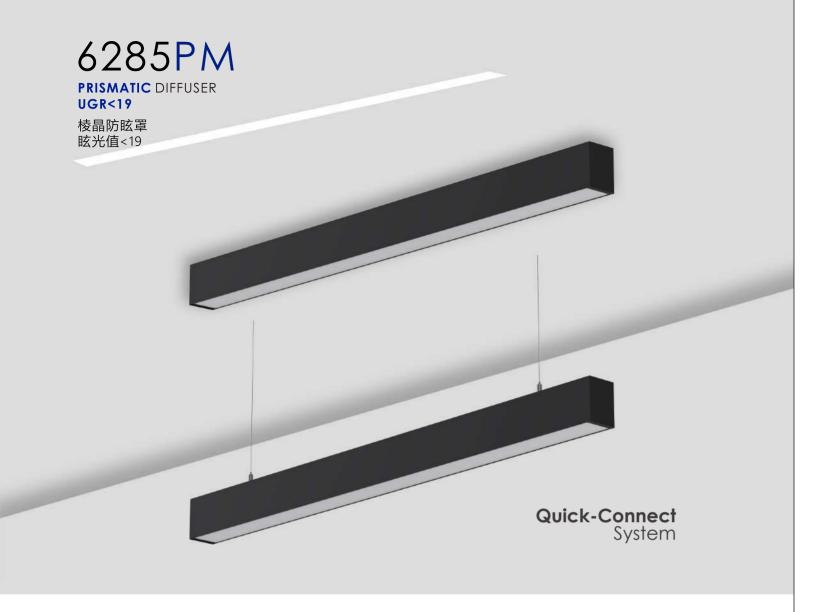

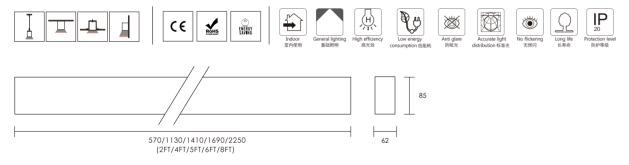

# PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

# TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6285PM-600	570*62*85MM	18W	3060Lm	1800Lm
LS6285PM-1200	1130*62*85MM	36W	6120Lm	3600Lm
LS6285PM-1400	1400*62*85MM	45W	7650Lm	4500Lm
LS6285PM-1800	1690*62*85MM	54W	9180Lm	5400Lm
LS6285PM-2400	2250*62*85MM	72W	12240Lm	7200Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6285PMU-600	570*62*85MM	27W	4590Lm	2700Lm
LS6285PMU-1200	1130*62*85MM	54W	9180Lm	5400Lm
LS6285PMU-1400	1400*62*85MM	63W	10710Lm	6300Lm
LS6285PMU-1800	1690*62*85MM	81W	13770Lm	8100Lm
LS6285PMU-2400	2250*62*85MM	108W	18360Lm	10800Lm


# PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

# LIGHT DISTRIBUTION CURVE 光强分布曲线







# CONTINUOUS 连接件

180° Extender 直连接件

T Shape Corner

T字形连接件



L Shape Corner L字形连接件


十字形连接件







DETAIL 细节



#### Accessories 配件

















<sup>\*</sup>For retail or wholesale.you can buy accessories seprately.零售或批发,配件可单独购买。
\*For project,you can tell us what exactly you want,we will recommend relatively prope カラス。 proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

# DESIGN POSSIBILITIES

Free your creativity

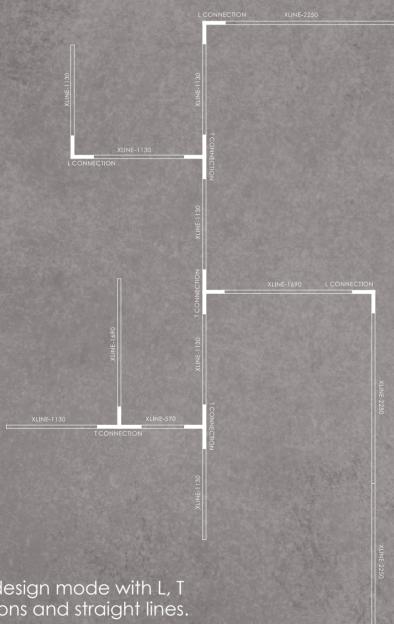











1. BCI Pagos Offices | Architecture and Lighting Design: Collective Architecture. | 2. BNP Paribas Cardif Offices | Architecture and Lighting Design: Grupo E.







1. BNP Paribas Cardif Offices | Architecture and Lighting Design: Grupo E. | 2. IGS Group Offices | Architecture: Elton y Leniz Arquitectos. | Lighting Design: LEVO Studio. 3. Turbus Bus Station | Architecture: Estudio FES | Lighting Design: Diseño de Luz.




# POWER SWITCHABLE


Traditionally, adjusting the power of a luminaire required the use of dimmable drivers and an external dimmer. With our new Power Switchable system, users can now switch power levels easily and cost-effectively, making lighting control more accessible and efficient.

# **CCT** CHANGEABLE

The CCT Changeable feature allows users to modify the color temperature according to their needs, preferences, or the specific task at hand. With a simple DIP switch, it is possible to transition from a warm, cozy atmosphere to a bright, energizing environment, providing flexibility and comfort in any space.



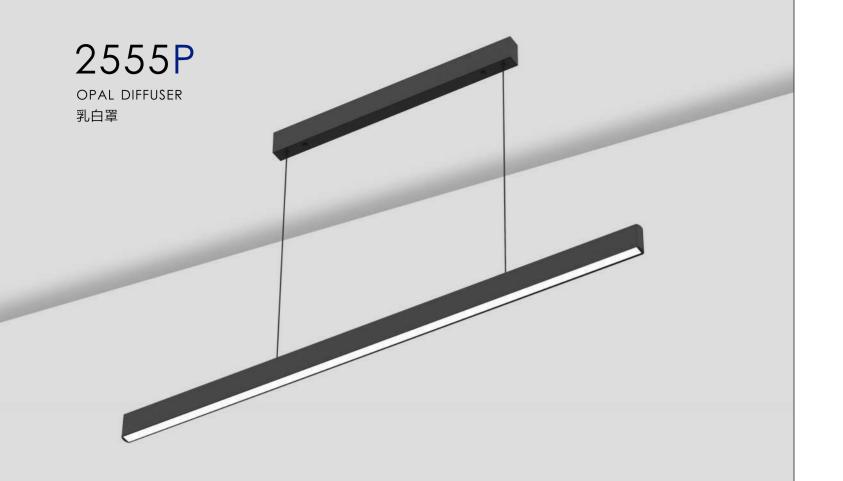

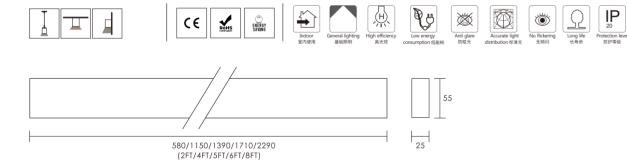

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
  Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- Fast and easy connection with no shadow.
- $\cdot$  High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS2555P-600	570*25*55mm(2FT)	12W	2040Lm	960Lm
LS2555P-1200	1130*25*55mm(4FT)	24W	4080Lm	19200Lm
LS2555P-1500	1410*25*55mm(5FT)	30W	5100Lm	2400Lm
LS2555P-1800	1690*25*55mm(6FT)	36W	6120Lm	2880Lm
LS2555P-2400	2250*25*55mm(8FT)	48W	8160Lm	3840Lm


#### PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor







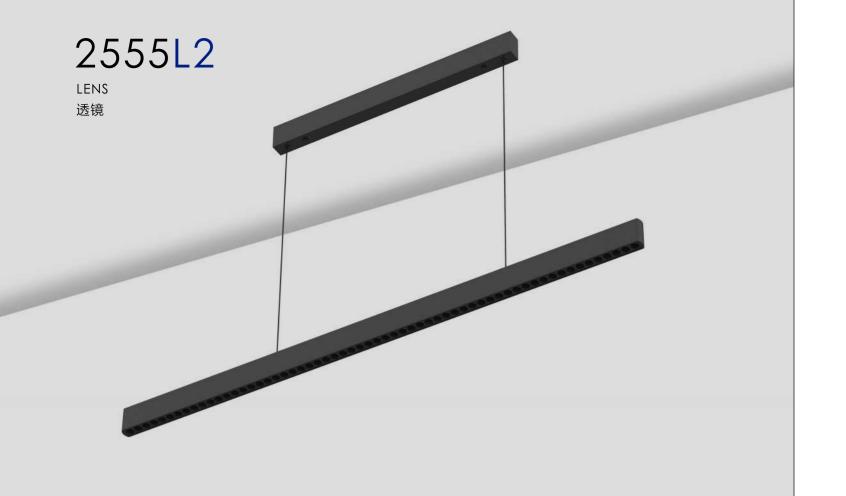

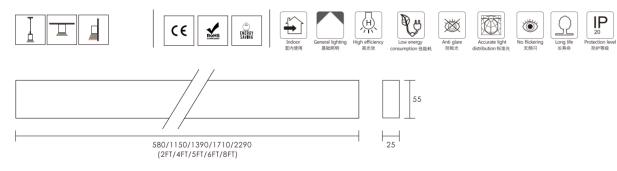

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- Long lifespan up to 50000hours, low decay and low maintanence cost.
  Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- Fast and easy connection with no shadow.
- $\cdot$  High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DAL调光、调色温驱动电源。
- F-TUV调光、DALI调光、调色温驱动电源。 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
L\$2555L2-600	580*25*55mm(2FT)	15W	2550Lm	1200Lm
L\$2555L2-1200	1150*25*55mm(4FT)	30W	5100Lm	2400Lm
L\$2555L2-1500	1390*25*55mm(5FT)	38W	6460Lm	3040Lm
LS2555L2-1800	1720*25*55mm(6FT)	45W	7650Lm	3600Lm
LS2555L2-2400	2290*25*55mm(8FT)	60W	10200Lm	4800Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
L\$2555L2-600	580*25*55mm(2FT)	15W	2550Lm	1200Lm
LS2555L2-1200	1150*25*55mm(4FT)	30W	5100Lm	2400Lm
LS2555L2-1500	1390*25*55mm(5FT)	38W	6460Lm	3040Lm
LS2555L2-1800	1720*25*55mm(6FT)	45W	7650Lm	3600Lm
LS2555L2-2400	2290*25*55mm(8FT)	60W	10200Lm	4800Lm


#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI SColor Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor


#### DETAIL 细节




#### LIGHT DISTRIBUTION CURVE 光强分布曲线




#### Accessories 配件











# 3535P

OPAL DIFFUSER

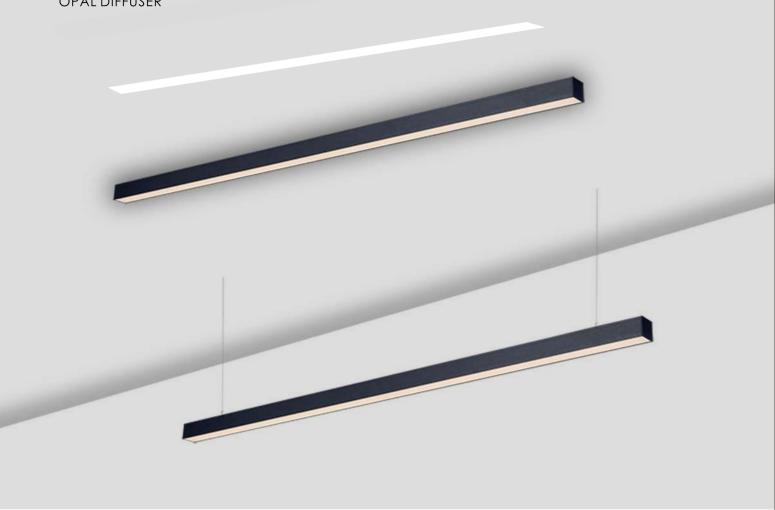



























#### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3535P-600	570*35*35mm(2FT)	9W	1530Lm	900Lm
LS3535P-1200	1130*35*35mm(4FT)	18W	3060Lm	1800Lm
LS3535P-1500	1410*35*35mm(5FT)	22W	3740Lm	2200Lm
LS3535P-1800	1690*35*35mm(6FT)	27W	4590Lm	2700Lm
LS3535P-2400	2250*35*35mm(8FT)	36W	6120Lm	3600Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3535PU-600	570*35*35mm(2FT)	18W	3060Lm	1800Lm
LS3535PU-1200	1130*35*35mm(4FT)	36W	6120Lm	3600Lm
LS3535PU-1500	1410*35*35mm(5FT)	44W	7480Lm	4400Lm
LS3535PU-1800	1690*35*35mm(6FT)	54W	9180Lm	5400Lm
LS3535PU-2400	2250*35*35mm(8FT)	72W	12240Lm	7200Lm


#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### LIGHT DISTRIBUTION CURVE 光强分布曲线







#### CONTINUOUS 连接件



180° Extender 直连接件



L Shape Corner L字形连接件



T Shape Corner T字形连接件



X Shape Corner 十字形连接件













<sup>\*</sup>For retail or wholesale, you can buy accessories seprately,零售或批发,配件可单独购买。 \*For project, you can tell us what exactly you want, we will recommend relatively prope ・エススス。 vely proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。








- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.

570/1130/1410/1690/2250

(2FT/4FT/5FT/6FT/8FT)

- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- · High efficiency PC and even light distribution, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数







#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### LIGHT DISTRIBUTION CURVE 光强分布曲线







#### CONTINUOUS 连接件

#### 180° Extender L Shape Corner 直连接件 L字形连接件 T Shape Corner X Shape Corner T字形连接件 十字形连接件

#### DETAIL 细节



#### Accessories 配件













<sup>\*</sup>For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively proper

vely proper accessories.工程项目, 请告知你的需求,我们会推荐合适配件。

# 3580PM PRISMATIC DIFFUSER UGR<19 棱晶防眩罩 眩光值<19



#### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.  $\cdot$  Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数





Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3580PMU-600	570*35*80mm(2FT)	27W	4590Lm	2430Lm
LS3580PMU-1200	1130*35*80mm(4FT)	54W	9180Lm	4860Lm
LS3580PMU-1500	1410*35*80mm(5FT)	63W	10710Lm	5670Lm
LS3580PMU-1800	1690*35*80mm(6FT)	81W	13770Lm	7290Lm
LS3580PMU-2400	2250*35*80mm(8FT)	108W	18360Lm	9720Lm

#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI S Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### LIGHT DISTRIBUTION CURVE 光强分布曲线







#### CONTINUOUS 连接件

#### 180° Extender L Shape Corner 直连接件 L字形连接件 T Shape Corner X Shape Corner T字形连接件 十字形连接件

#### DETAIL 细节






<sup>\*</sup>For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively proper

vely proper accessories.工程项目, 请告知你的需求,我们会推荐合适配件。



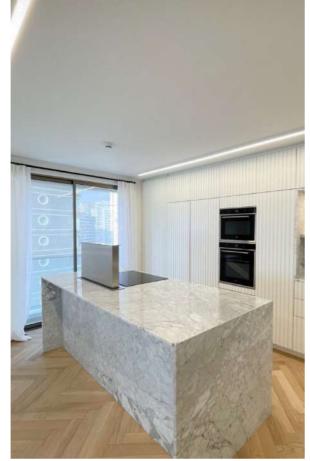













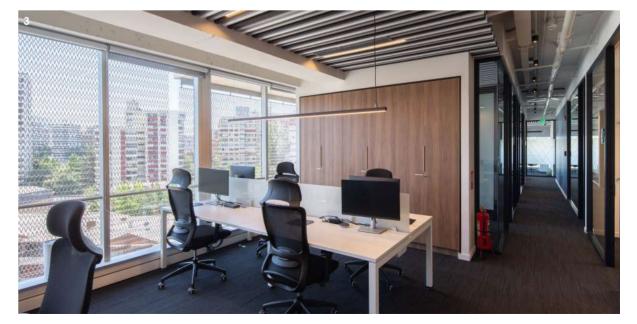

 $1.\,Show room\,BASH\,\,Vespucio\,\,|\,\,Architecture;\,WORKPLACES.\,\,|\,\,2.\,Transtel\,\,Offices\,\,|\,\,Architecture;\,Espiral\,\,Architecture.$ 

3. Novo Nordisk Offices | Architecture: FMZ Arquitectura | Lighting Design: Docevolts-Francisca Nicoletti.

# 3580L1 **OPTIC LENS**

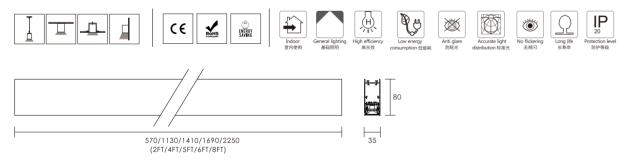


#### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency optic lens ,} \\ \text{anti-glare feature, easy installation to any}$
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3580L1-600	570*35*80mm(2FT)	2*5W	1400Lm	900Lm
L\$3580L1-1200	1130*35*80mm(4FT)	4*5W	2800Lm	1800Lm
L\$3580L1-1500	1410*35*80mm(5FT)	6*5W	4200Lm	2700Lm
LS3580L1-1800	1690*35*80mm(6FT)	6*5W	4200Lm	2700Lm
LS3580L1-2400	2250*35*80mm(8FT)	8*5W	56001 m	36001 m

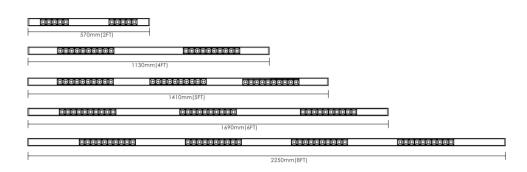


#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### DETAIL 细节



#### LIGHT DISTRIBUTION CURVE 光强分布曲线

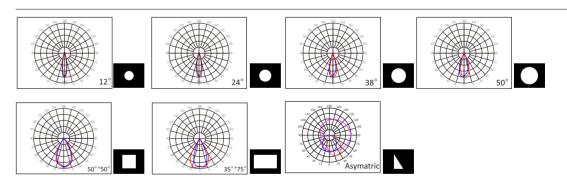




<sup>\*</sup>For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。 \*For project, you can tell us what exactly you want, we will recommend relatively proper

vely proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。



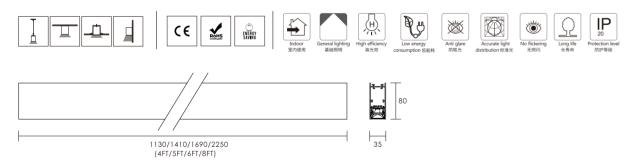

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- · High efficiency PC and optic lens, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩与光学透镜组合,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3580C-1200	1130*35*80mm(4FT)	2*5W+18W	3300Lm	1980Lm
LS3580C-1500	1410*35*80mm(6FT)	4*5W+18W	4800Lm	2880Lm
LS3580C-1800	1690*35*80mm(8FT)	4*5W+27W	5250Lm	3150Lm
L\$3580C-2400	2250*35*80mm(8FT)	4*5W+36W	6600Lm	3960Lm

	<i>\(\(\tau_i\)\)</i>	(1/1/1/1			
I	570mm(2FT)				
	1130mm(4FT)				
			図		
	570mm(2FT)				
	1410mm(5FT)				
	840mm(3FT)			_	
	1690mm(6FT)				
		VIIIIIIIII			
		-	113	0mm(4FT)	
	2250mr	n(8FT)			


#### PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### DETAIL 细节



#### LIGHT DISTRIBUTION CURVE 光强分布曲线

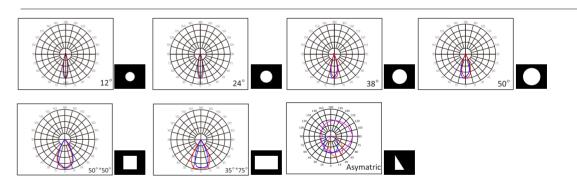














<sup>\*</sup>For retail or wholesale, you can buy accessories seprately. 零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目, 请告知你的需求,我们会推荐合适配件。



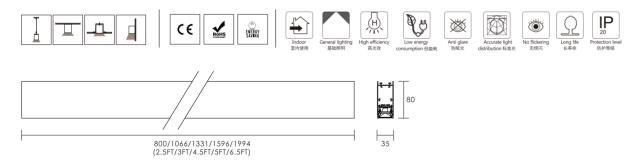


- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost.
- Distinguished end-caps,No screw to be appeared,No light leak.
- · High grade aluminum, high quality surface painting.
- Fast and easy connection with no shadow.
- $\cdot \mbox{ High efficiency optic lens,} \mbox{no shawdon,} \mbox{anti-glare feature,} \mbox{easy installation to any shape.}$
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DALI调光、调色温驱动电源。
- 7-10V调光、DALI调光、调巴温驱动电源。 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
L\$3580L2-800	800*35*80mm(2.5FT)	6*5W	4200Lm	2700Lm
LS3580L2-1000	1066*35*80mm(3.5FT)	8*5W	5600Lm	3600Lm
LS3580L2-1400	1331*35*80mm(4.5FT)	10*5W	7000Lm	4500Lm
LS3580L2-1600	1596*35*80mm(5FT)	12*5W	8400Lm	5400Lm
LS3580L2-2000	1994*35*80mm(6.5FT)	15*5W	10500Lm	6750Lm

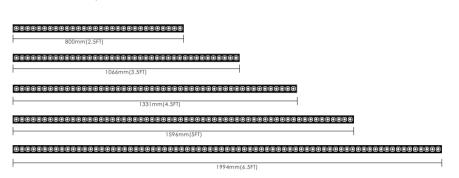


#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor


#### DETAIL 细节



#### LIGHT DISTRIBUTION CURVE 光强分布曲线

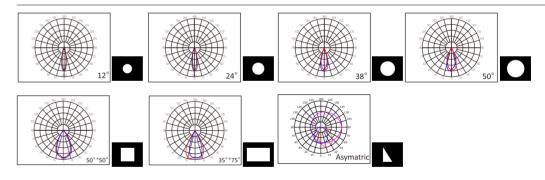


#### Accessories 配件




<sup>\*</sup>For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

3580165

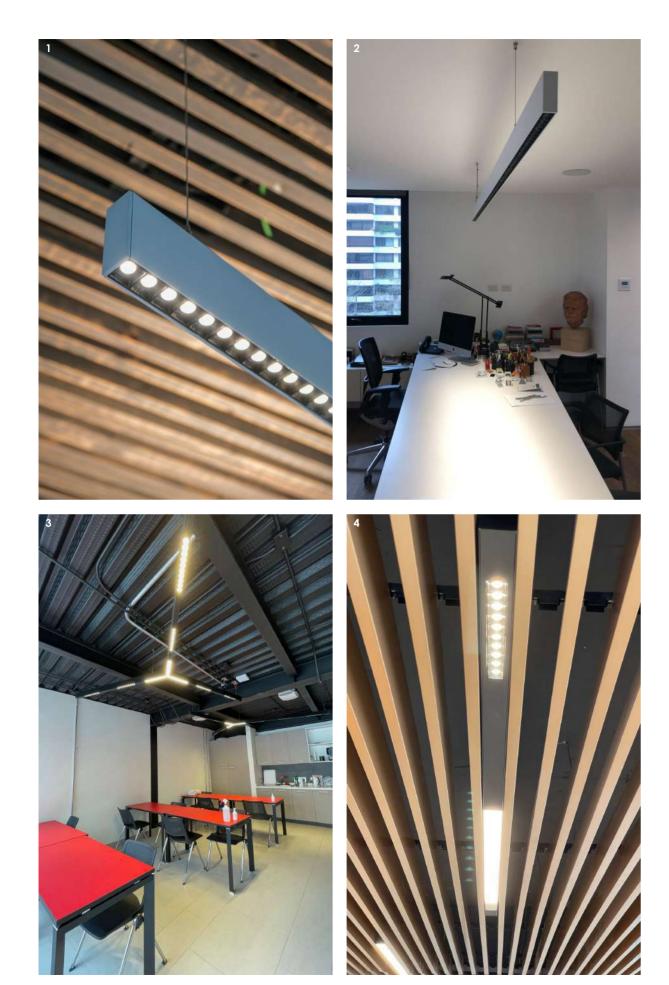



1,4: Scanavini Showroom | Architecture: AJS Arquitectos | Lighting Design: Campino Iluminación - Victoria Campino.
2. Gonzalo Mardones Offices | Lighting Design: Diseño de Luz. | 3. Research Center JRI | Architecture: De Toro & Sitja.

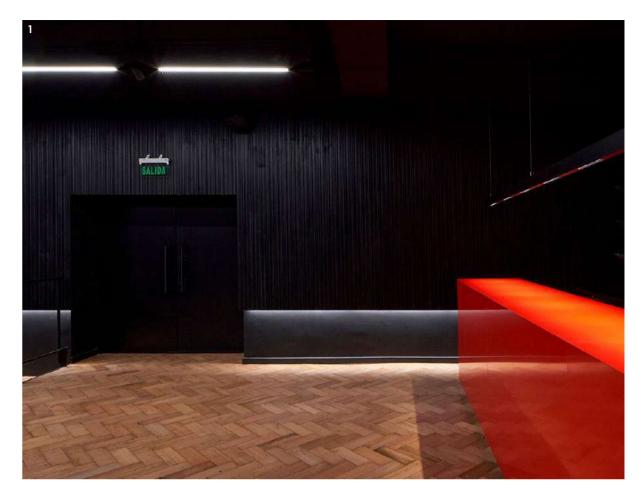



Teatro del Ángel | Architecture: Alberto Moletto | Lighting Design: Antonia Peón Vega / Matias López
 DITEC - Jaguar y Land Rover Showroom. | Architecture: Rodrigo Errázuriz. | Lighting Design: LEVO Studio.

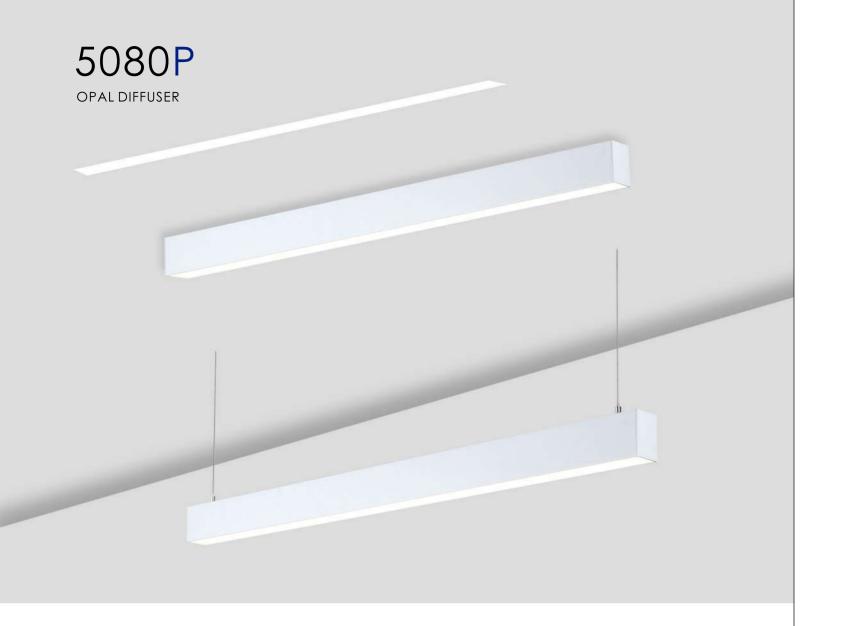

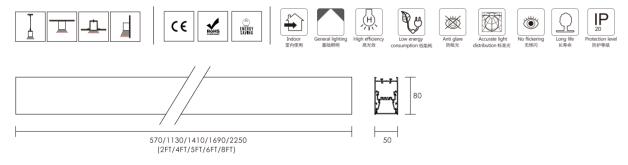

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080P-600	570*50*80mm(2FT)	18W	3060Lm	1800Lm
LS5080P-1200	1130*50*80mm(4FT)	36W	6120Lm	3600Lm
LS5080P-1500	1410*50*80mm(5FT)	45W	7650Lm	4500Lm
LS5080P-1800	1690*50*80mm(6FT)	54W	9180Lm	5400Lm
LS5080P-2400	2250*50*80mm(8FT)	72W	12240Lm	7200Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080PU-600	570*50*80mm(2FT)	27W	4590Lm	2700Lm
LS5080PU-1200	1130*50*80mm(4FT)	54W	9180Lm	5400Lm
LS5080PU-1500	1410*50*80mm(5FT)	63W	10710Lm	6300Lm
LS5080PU-1800	1690*50*80mm(6FT)	81W	13770Lm	8100Lm
LS5080PU-2400	2250*50*80mm(8FT)	108W	18360Lm	10800Lm


#### PRODUCT OPTION 可选产品配置

	CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
	CRI	□ 82+ □ 90+ □ 95+
	Finish	□ White ■ Black ■ Silver ■ Custom Color
	Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
	Emergency	□ None □ 1.5 hours, half power
-	Sensor	□ None □ Motion and daylight sensor

#### LIGHT DISTRIBUTION CURVE 光强分布曲线







#### CONTINUOUS 连接件

180° Extender 直连接件

T Shape Corner

T字形连接件




L Shape Corner L字形连接件



X Shape Corner 十字形连接件

DETAIL 细节





#### Accessories 配件

















nxyx。 y proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

<sup>\*</sup>For retail or wholesale.you can buy accessories seprately.零售或批发,配件可单独购买。
\*For project,you can tell us what exactly you want,we will recommend relatively prope




# UGR<19 眩光值小于19

## 5080PM

PRISMATIC DIFFUSER UGR<19

棱晶防眩罩



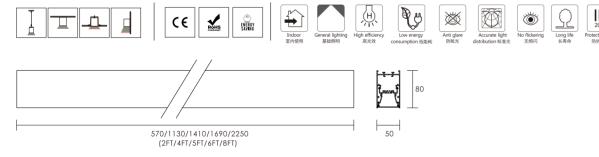

#### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.  $\cdot$  Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- $\cdot \, \text{High efficiency PC and even light distribution,} \\ \text{no shawdon,} \\ \text{anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080PM-600	570*50*80mm(2FT)	18W	3060Lm	1800Lm
LS5080PM-1200	1130*50*80mm(4FT)	36W	6120Lm	3600Lm
LS5080PM-1500	1410*50*80mm(5FT)	45W	7650Lm	4500Lm
LS5080PM-1800	1690*50*80mm(6FT)	54W	9180Lm	5400Lm
LS5080PM-2400	2250*50*80mm(8FT)	72W	12240Lm	7200Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080PMU-600	570*50*80mm(2FT)	27W	4590Lm	2700Lm
LS5080PMU-1200	1130*50*80mm(4FT)	54W	9180Lm	5400Lm
LS5080PMU-1500	1410*50*80mm(5FT)	63W	10710Lm	6300Lm
LS5080PMU-1800	1690*50*80mm(6FT)	81W	13770Lm	8100Lm
LS5080PMU-2400	2250*50*80mm(8FT)	108W	18360Lm	10800Lm


#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### LIGHT DISTRIBUTION CURVE 光强分布曲线







#### CONTINUOUS 连接件

180° Extender 直连接件

T Shape Corner T字形连接件




L Shape Corner L字形连接件



X Shape Corner 十字形连接件

#### DETAIL 细节





















<sup>\*</sup>For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

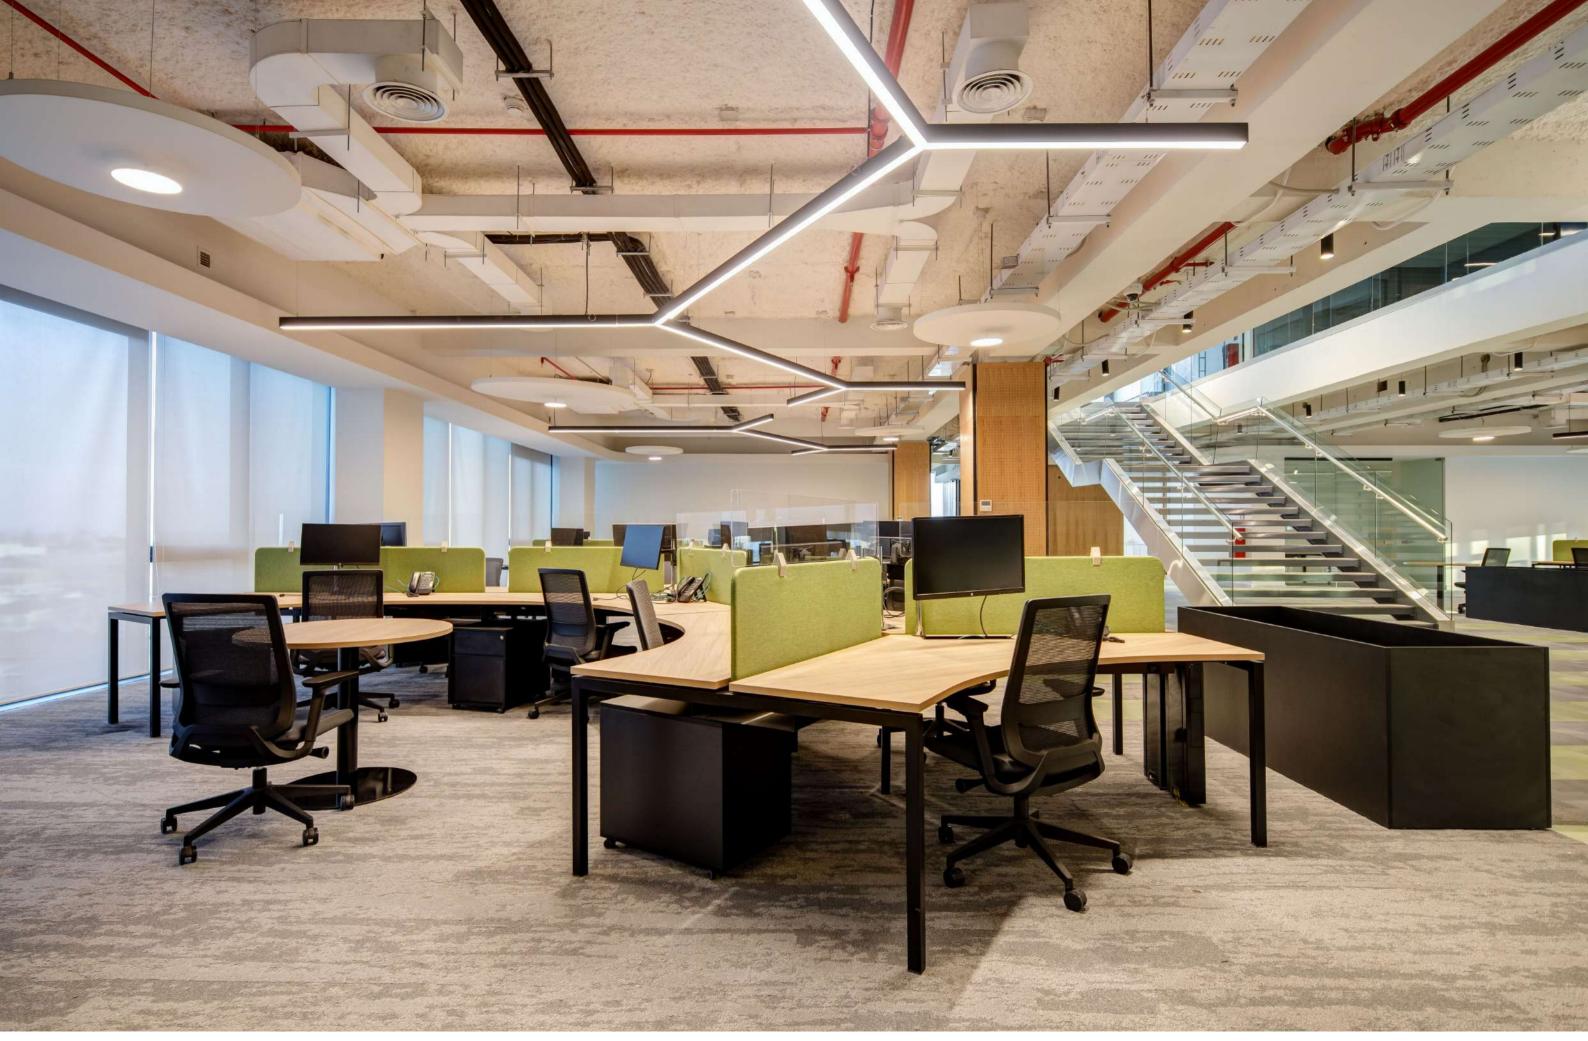



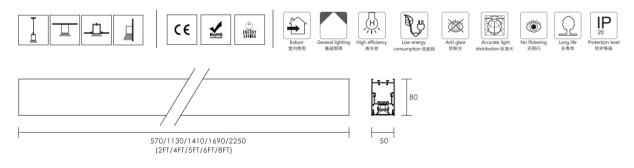

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- $\cdot \, \text{High efficiency PC and even light distribution,} \\ \text{no shawdon,} \\ \text{anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080L1-600	570*50*80mm(2FT)	2*5W	1400Lm	900Lm
LS5080L1-1200	1130*50*80mm(4FT)	4*5W	2800Lm	1800Lm
LS5080L1-1500	1410*50*80mm(5FT)	6*5W	4200Lm	2700Lm
LS5080L1-1800	1690*50*80mm(6FT)	6*5W	4200Lm	2700Lm
LS5080L1-2400	2250*50*80mm(8FT)	8*5W	5600Lm	3600Lm

570mm(2FT)	<b>□</b>				
	30mm(4FT)	00000	0000		
	1410mm(5FT)		——		
20000 20000 20	1690mm	(6FT)			
00000000	000000	000			
		2250mm(8FT)			


#### PRODUCT OPTION 可选产品配置


	CCT	■ 3000K	■ 4000K	■ 5000K	□ 6000K
	CRI	□ 82+	□ 90+	□ 95+	
	Finish	□ White	■ Black	Silver	■ Custom Color
Ξ	Dimming	□ On/off	□ 1-10V	□ DALI	■ Color Changing
	Emergency	□ None	□ 1.5 ho	urs,half p	ower
	Sensor	□None	□ Motio	n and day	light sensor

#### DETAIL 细节





#### LIGHT DISTRIBUTION CURVE 光强分布曲线

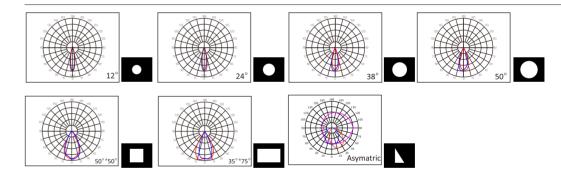



<sup>\*</sup>For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

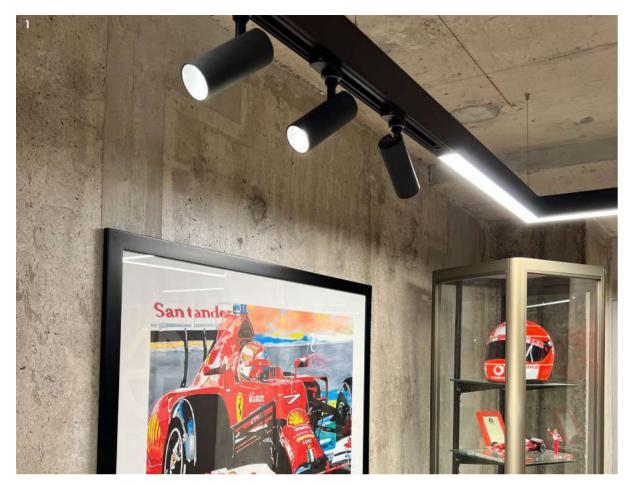

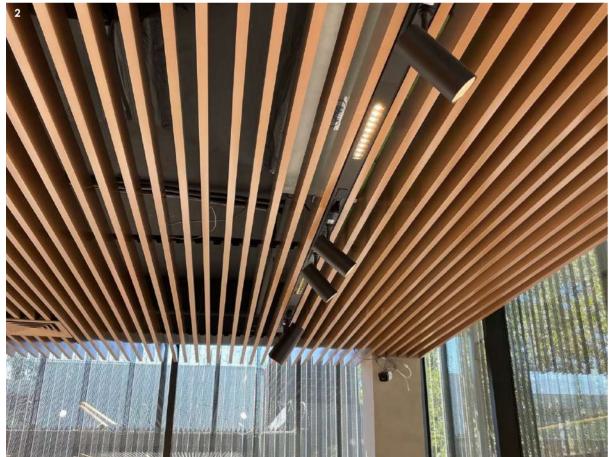












Scanavini Showroom | Architecture: AJS Arquitectos | Lighting Design: Campino lluminación - Victoria Campino
 Car Storage | Architecture and Lighting Design: Urban Chic-Marcelo Varetto



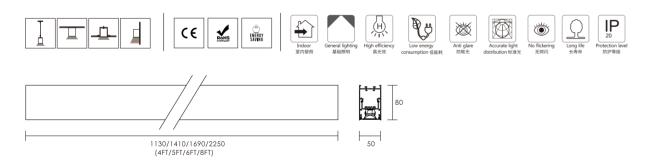

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
  Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps,No screw to be appeared,No light leak.
- · High grade aluminum, high quality surface painting.
- Fast and easy connection with no shadow.
- $\cdot$  High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DAL调光、调色温驱动电源。
- T-TUV順光、DALI順光、順巴温驱动电源。 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩与光学透镜组合,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080C-1200	1130*50*80mm(4FT)	2*5W+12W	3300Lm	1980Lm
LS5080C-1500	1410*50*80mm(5FT)	4*5W+12W	4800Lm	2880Lm
LS5080C-1800	1690*50*80mm(6FT)	4*5W+15W	5250Lm	3150Lm
LS5080C-2400	2250*50*80mm(8FT)	4*5W+24W	6600Lm	3960Lm

	570mm(2FT)				
1130mm	411)				
	1410mm(5FT)			_	
	840mm(3FT) 1690mm(6FT)			<b>_</b> 	
			113	30mm(4FT)	
	225	Omm(8FT)			$\neg$


#### PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### DETAIL 细节



#### LIGHT DISTRIBUTION CURVE 光强分布曲线

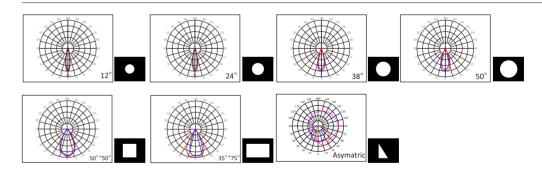














<sup>\*</sup>For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。


# 5080T OPAL DIFFUSER+OPTIC LENS+Track

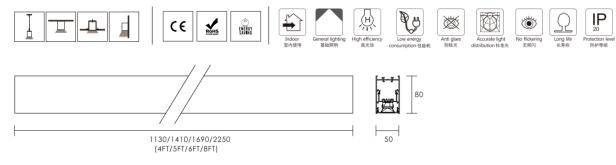


#### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.  $\cdot$  Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- $\cdot \, \text{High efficiency PC and even light distribution,} \\ \text{no shawdon,} \\ \text{anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩与光学透镜组合,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数

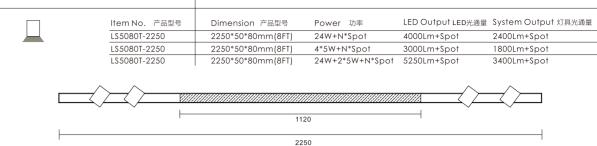


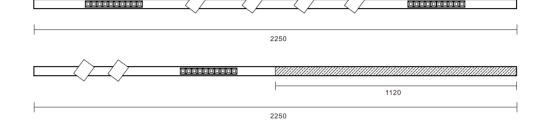


#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor


#### DETAIL 细节




#### LIGHT DISTRIBUTION CURVE 光强分布曲线

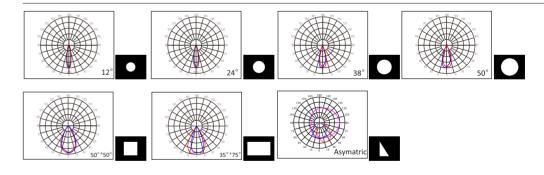


#### Accessories 配件



\*For retail or wholesale.you can buy accessories seprately.零售或批发,配件可单独购买。 \*For project,you can tell us what exactly you want,we will recommend relatively prope ·班网头。 ly proper accessories.工程项目, 请告知你的需求,我们会推荐合适配件。

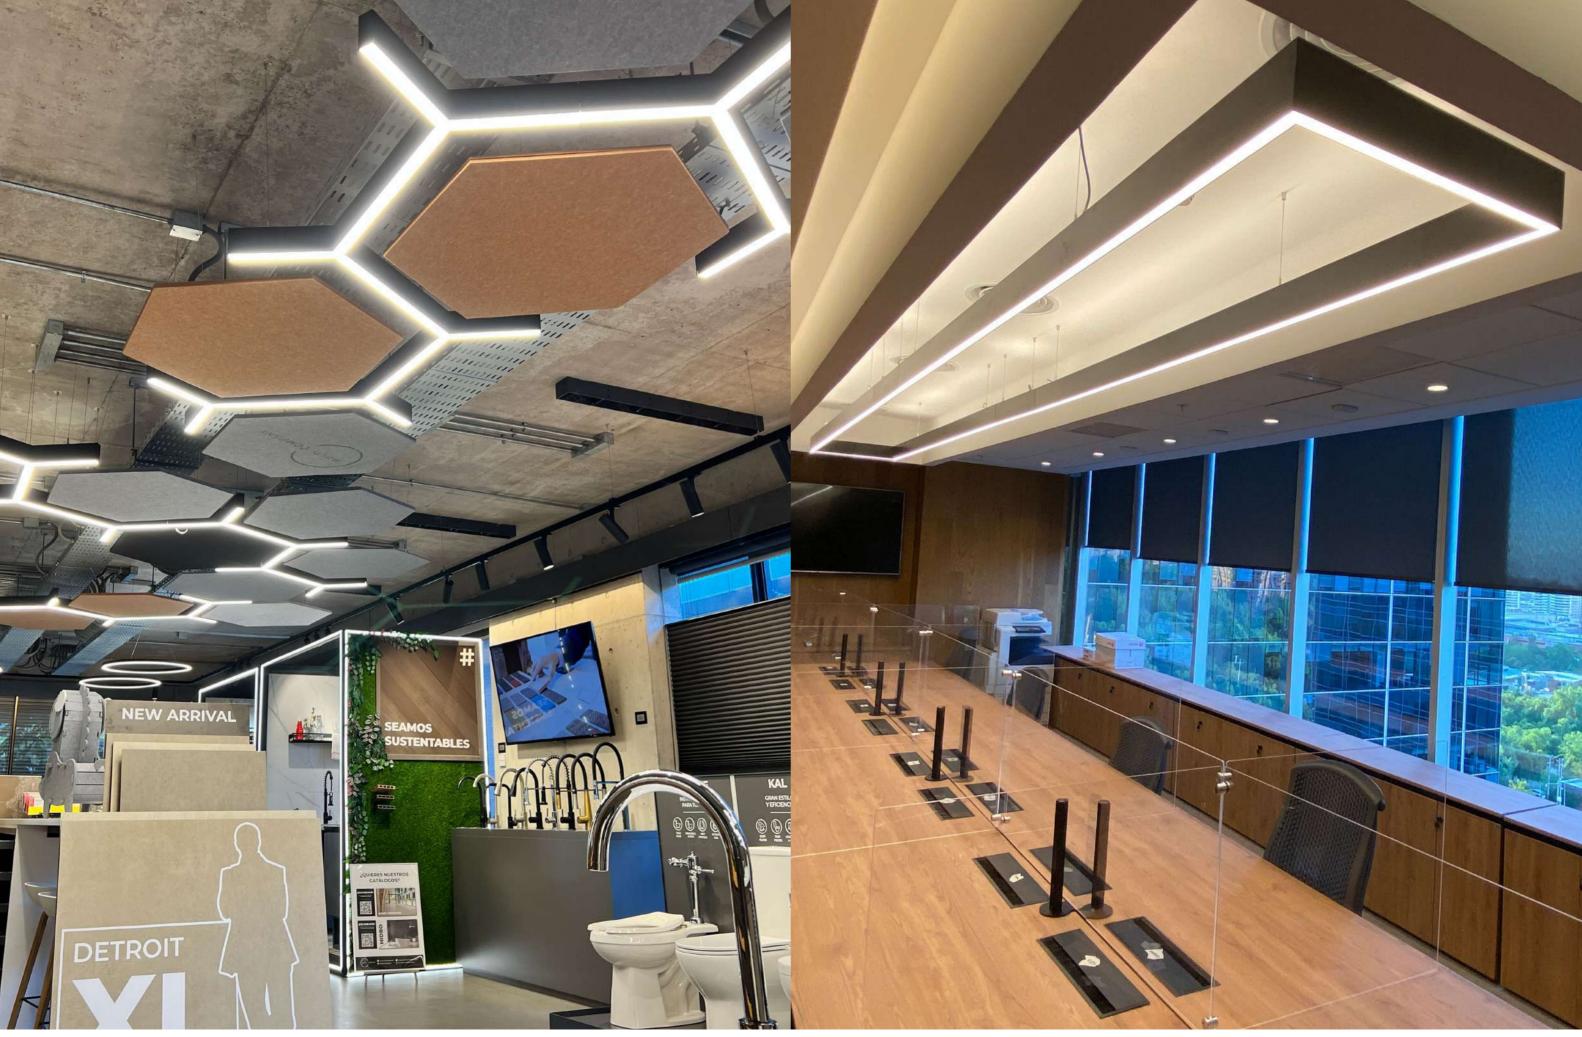



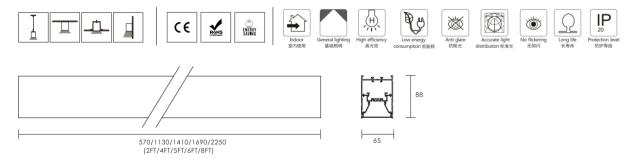

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- $\cdot \, \text{High efficiency PC and even light distribution,} \\ \text{no shawdon,} \\ \text{anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝压铸铝端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6588P-600	570*65*88mm(2FT)	18W	3060Lm	1800Lm
LS6588P-1200	1130*65*88mm(4FT)	36W	6120Lm	3600Lm
LS6588P-1500	1410*65*88mm(5FT)	45W	7650Lm	4500Lm
LS6588P-1800	1690*65*88mm(6FT)	54W	9180Lm	5400Lm
LS6588P-2400	2250*65*88mm(8FT)	72W	12240Lm	7200Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6588PU-600	570*65*88mm(2FT)	27W	4590Lm	2700Lm
LS6588PU-1200	1130*65*88mm(4FT)	45W	7650Lm	4500Lm
LS6588PU-1500	1410*65*88mm(5FT)	67W	11390Lm	6700Lm
LS6588PU-1800	1690*65*88mm(6FT)	81W	13770Lm	8100Lm
LS6588PU-2400	2250*65*88mm(8FT)	108W	18360Lm	10800Lm

#### PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### LIGHT DISTRIBUTION CURVE 光强分布曲线









#### CONTINUOUS 连接件



180° Extender 直连接件

T Shape Corner

T字形连接件



L Shape Corner L字形连接件



X Shape Corner 十字形连接件

DETAIL 细节




















<sup>\*</sup>For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively prope

oper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

# 6588PM PRISMATIC DIFFUSER UGR<19 棱晶防眩罩 眩光值<19

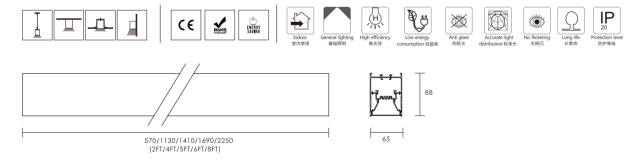

#### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- · High efficiency PC and even light distribution, no shawdon, anti-glare feature, easy installation to any shape.
- $\cdot \\ Application: Office, School, Hospital, Supermartket, Shopping$ Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝压铸铝端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数



108W

18360I m


10800Lm

#### PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LS6588PMU-2400 2250\*65\*88mm(8FT)

#### LIGHT DISTRIBUTION CURVE 光强分布曲线







#### CONTINUOUS 连接件


#### [] 180° Extender 直连接件

T Shape Corner T字形连接件

#### L Shape Corner L字形连接件



DETAIL 细节

















<sup>\*</sup>Forretail or wholesale, you can buy accessories seprately, 零售或批发,配件可单独购买。 \*For project, you can tell us what exactly you want, we will recommend relatively prope

vely proper accessories.工程项目. 请告知你的需求,我们会推荐合适配件。

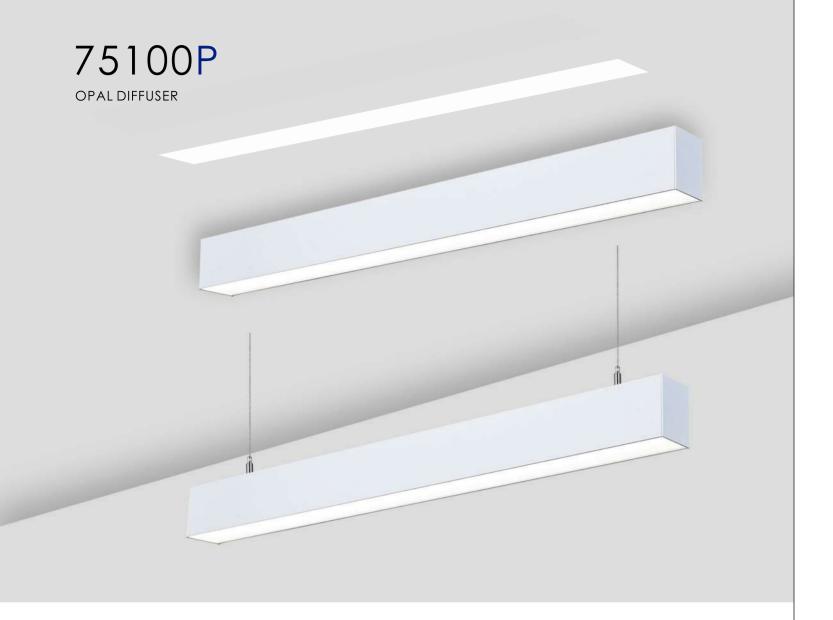

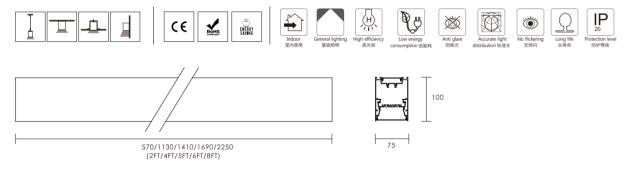

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- $\cdot \, \text{High efficiency PC and even light distribution,} \\ \text{no shawdon,} \\ \text{anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝压铸铝端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS75100P-600	570*75*100mm(2FT)	18W	3060Lm	1800Lm
LS75100P-1200	1130*75*100mm(4FT)	36W	6120Lm	3600Lm
LS75100P-1500	1410*75*100mm(5FT)	45W	7650Lm	4500Lm
LS75100P-1800	1690*75*100mm(6FT)	54W	9180Lm	5400Lm
LS75100P-2400	2250*75*100mm(8FT)	72W	12240Lm	7200Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS75100PU-600	570*75*100mm(2FT)	27W	4590Lm	2700Lm
LS75100PU-1200	1130*75*100mm(4FT)	45W	7650Lm	4500Lm
LS75100PU-1500	1410*75*100mm(5FT)	67W	11390Lm	6700Lm
LS75100PU-1800	1690*75*100mm(6FT)	81W	13770Lm	8100Lm
LS75100PU-2400	2250*75*100mm(8FT)	108W	18360Lm	10800Lm

#### PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### LIGHT DISTRIBUTION CURVE 光强分布曲线









#### CONTINUOUS 连接件

### 直连接件

180° Extender

T Shape Corner

T字形连接件




L Shape Corner



X Shape Corner 十字形连接件

#### DETAIL 细节




















<sup>\*</sup>For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目, 请告知你的需求,我们会推荐合适配件。



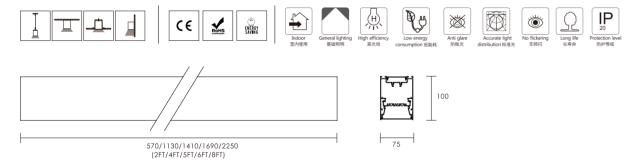

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
   Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- Distinguished ena-caps, No screw to be appeared, No light
   High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- $\cdot$  High efficiency PC and even light distribution, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保S年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DAL调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝压铸铝端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数






#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor


#### LIGHT DISTRIBUTION CURVE 光强分布曲线



T Shape Corner

T字形连接件






#### CONTINUOUS 连接件

### 180° Extender 直连接件 L字形连接件



X Shape Corner 十字形连接件

#### DETAIL 细节



Canopy 吸顶盒


#### Accessories 配件



\*For retail or wholesale, you can buy accessories seprately,零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。






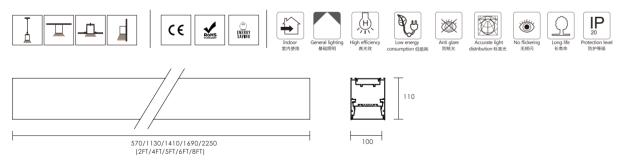

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- · High efficiency PC and even light distribution, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数







#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### LIGHT DISTRIBUTION CURVE 光强分布曲线







#### CONTINUOUS 连接件



T Shape Corner

T字形连接件





L Shape Corner L字形连接件



X Shape Corner 十字形连接件

DETAIL 细节















<sup>\*</sup>For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。













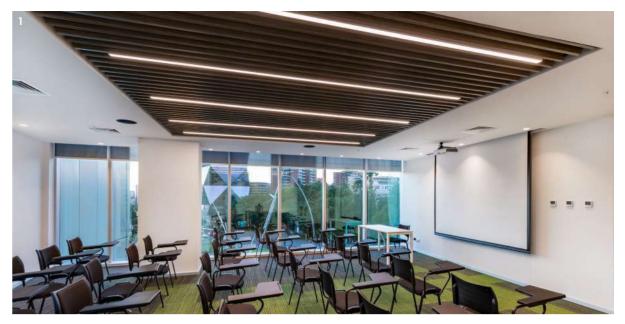



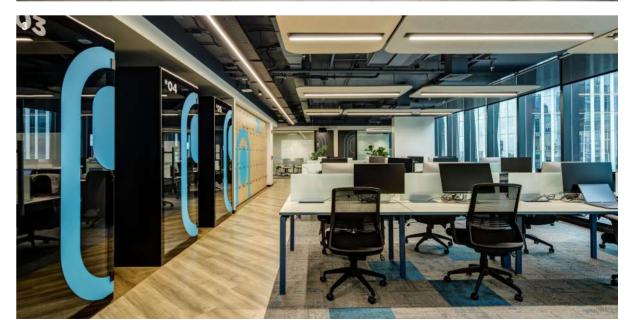

I. Indura Offices | Architecture: AJS Arquitectos | Lighting Design: Diseño de Luz.
 Studio PAS Academy | Architecture and Design: Sientecinco. | 3. Onnet Fibra | Architecture and Construction: CASBRO.

# **XLINE SERIES**

RECESSED

Designed for seamless integration into architecture, XLINE Recessed brings maximum versatility to linear lighting. Available with an opal diffuser, optical modules, or a combination of both, it adapts to the needs of residential, commercial, and educational spaces, providing lighting that is both functional and visually refined.

Its flexibility allows the use of multiple connectors to create continuous recessed compositions, opening new possibilities for creative design within ceilings and walls. To meet the demands of different projects, XLINE Recessed is available in various profiles — from slim formats to more robust sections — ensuring the perfect balance between discretion and performance.

More than lighting, XLINE Recessed is a tool to enhance architecture with precision, elegance, and creative freedom.






1.BNP Paribas Cardif Offices | Architecture and Lighting Design: Grupo E.

# 4737P

OPAL DIFFUSER

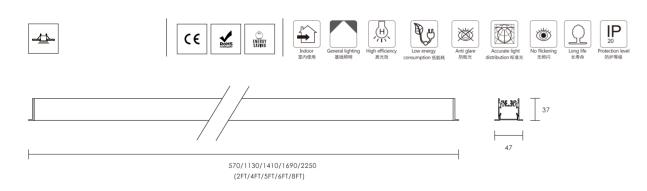

#### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.  $\cdot$  Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- $\cdot \, \text{High efficiency PC and even light distribution,} \\ \text{no shawdon,} \\ \text{anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737P-600	570*47*37mm(2FT)	18W	2040Lm	1620Lm
LR4737P-1200	1130*47*37mm(4FT)	36W	4080Lm	3240Lm
LR4737P-1500	1410*47*37mm(5FT)	45W	6120Lm	3600Lm
LR4737P-1800	1690*47*37mm(6FT)	54W	7140Lm	4320Lm
LR4737P-2400	2250*47*37mm(8FT)	72W	8080Lm	6480Lm


#### PRODUCT OPTION 可选产品配置

CCI	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### LIGHT DISTRIBUTION CURVE 光强分布曲线







#### CONTINUOUS 连接件



180° Extender 直连接件



L Shape Corner L字形连接件




T Shape Corner T字形连接件



X Shape Corner 十字形连接件

#### DETAIL 细节





#### Accessories 配件








<sup>\*</sup>For retail or wholesale, you can buy accessories seprately。零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively proper accessories. 工程项目,请告知你的需求,我们会推荐合适配件。



## 4737PM

PRISMATIC DIFFUSER UGR<19

棱晶防眩罩 眩光值<19

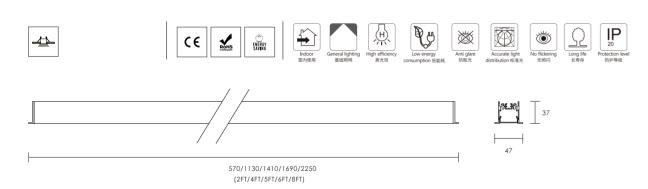

#### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.  $\cdot$  Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- $\cdot \, \text{High efficiency PC and even light distribution,} \\ \text{no shawdon,} \\ \text{anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737PM-600	570*47*37mm(2FT)	18W	2040Lm	1260Lm
LR4737PM-1200	1130*47*37mm(4FT)	36W	4080Lm	2520Lm
LR4737PM-1500	1410*47*37mm(5FT)	45W	6120Lm	3150Lm
LR4737PM-1800	1690*47*37mm(6FT)	54W	7140Lm	3780Lm
LR4737PM-2400	2250*47*37mm(8FT)	72W	8080Lm	5040Lm


#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### LIGHT DISTRIBUTION CURVE 光强分布曲线







#### CONTINUOUS 连接件



180° Extender 直连接件



L Shape Corner L字形连接件




T Shape Corner T字形连接件



X Shape Corner 十字形连接件

#### DETAIL 细节









- \*For retail or wholesale, you can buy accessories seprately,零售或批发,配件可单独购买。
  \*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。





1. Magasich Office | Architecture: Francisco Vivanco | Lighting Design: Diseño de Luz | 2. BCI Pagos Offices | Architecture and Lighting Design: Collective Architecture.









1. Saint George School's Classroom | Architecture: Elton Deves Arquitectos | Lighting Design: Docevolts.

<sup>2.</sup> BNP Paribas Cardif Offices | Architecture and Lighting Design: Grupo E| 3. Car Storage | Architecture and Lighting Design: Urban Chic-Marcelo Varetto.

# 4737L1

**OPTIC LENS** 

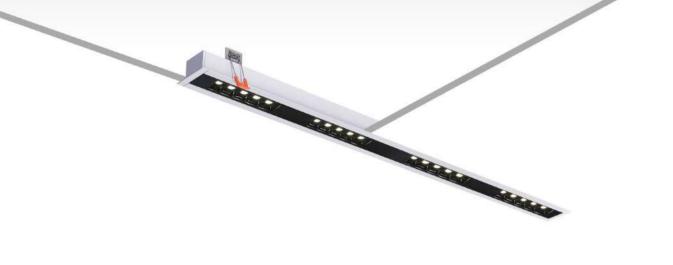

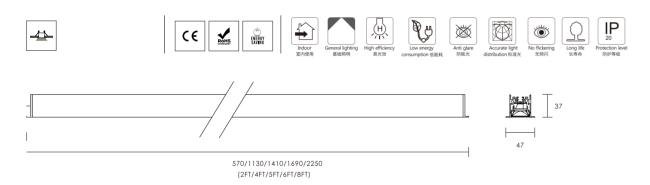


#### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost. · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- $\cdot \ High\ efficiency\ optic\ lens, no\ shawdon, anti-glare\ feature, easy\ installation$ to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737L1-600	570*47*37mm(2FT)	2*5W	1400Lm	900Lm
LR4737L1-1200	1130*47*37mm(4FT)	4*5W	2800Lm	1800Lm
LR4737L1-1500	1410*47*37mm(5FT)	6*5W	4200Lm	2700Lm
LR4737L1-1800	1690*47*37mm(6FT)	6*5W	4200Lm	2700Lm
LR4737L1-2400	2250*47*37mm(8FT)	8*5W	5600Lm	3600Lm

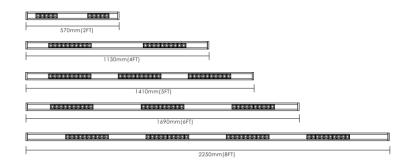


#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	☐ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### DETAIL 细节



#### LIGHT DISTRIBUTION CURVE 光强分布曲线

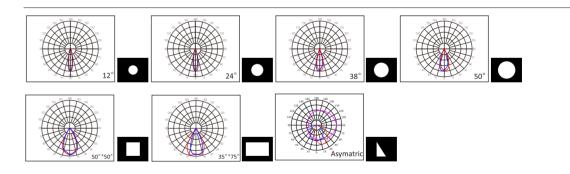








<sup>\*</sup>For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

## 4737L2

OPTIC LENS SEAMLESS

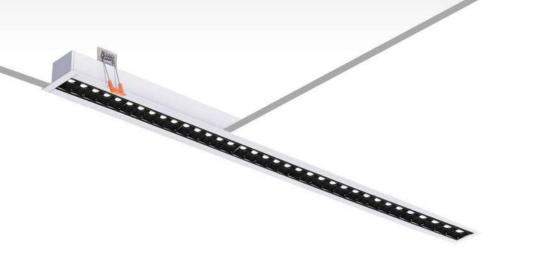




#### PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
  Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- $\cdot \mbox{ High efficiency optic lens, no shawdon, anti-glare } \quad \mbox{feature, easy installation to any shape.} \\$
- $\cdot \mbox{ Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area}$
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737L2-800	813*47*37mm(2.5FT)	6*5W	4200Lm	2700Lm
LR4737L2-1000	1078*47*37mm(3.5FT)	8*5W	5600Lm	3600Lm
LR4737L2-1400	1343*47*37mm(4.5FT)	10*5W	6000Lm	4500Lm
LR4737L2-2000	2005*47*37mm(6.5FT)	15*5W	10500Lm	6750Lm

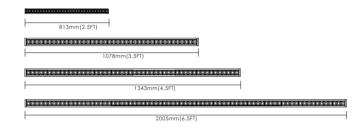


#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### DETAIL 细节



#### LIGHT DISTRIBUTION CURVE 光强分布曲线

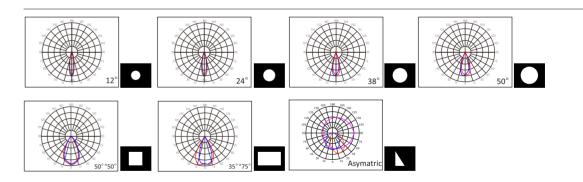

#### Accessories 配件








<sup>\*</sup>For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。

209

<sup>\*</sup>For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

# 4737C

OPTIC LENS+OPAL DIFFUSER

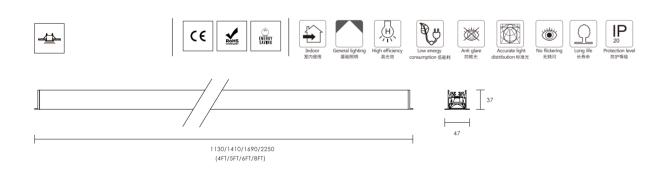


#### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost. · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- · High efficiency PC and optic lens, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩与光学透镜组合,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737C-1200	1130*47*37mm(4FT)	2*5W+12W	3080Lm	1980Lm
LR4737C-1500	1410*47*37mm(5FT)	4*5W+12W	4480Lm	2880Lm
LR4737C-1800	1690*47*37mm(6FT)	4*5W+15W	4900Lm	3150Lm
LR4737C-2400	2250*47*37mm(8FT)	4*5W+24W	6160Lm	3960Lm

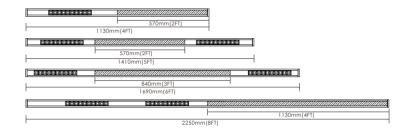


#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI S Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### DETAIL 细节



#### LIGHT DISTRIBUTION CURVE 光强分布曲线

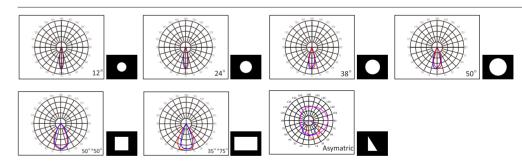








<sup>\*</sup>for retail or wholesale, you can buy accessories seprately,零售或批发,配件可单独购买。
\*for project, you can tell us what exactly you want, we will recommend relatively proper accessories 工程项目,请告知你的需求,我们会推荐合适配件。

# 6537P OPAL DIFFUSER

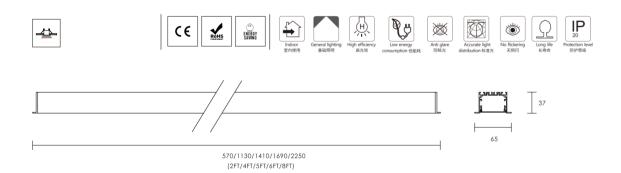

#### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.  $\cdot$  Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- $\cdot \, \text{High efficiency PC and even light distribution,} \\ \text{no shawdon,} \\ \text{anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

#### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR6537P-600	570*65*37mm(2FT)	18W	2040Lm	1620Lm
LR6537P-1200	1130*65*37mm(4FT)	36W	4080Lm	3240Lm
LR6537P-1500	1410*65*37mm(5FT)	45W	6120Lm	4050Lm
LR6537P-1800	1690*65*37mm(6FT)	54W	7140Lm	4860Lm
LR6537P-2400	2250*65*37mm(8FT)	72W	8160Lm	6480Lm


#### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI S Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

#### LIGHT DISTRIBUTION CURVE 光强分布曲线







#### CONTINUOUS 连接件


180° Extender 直连接件

L Shape Corner L字形连接件



X Shape Corner 十字形连接件

#### DETAIL 细节







#### Accessories 配件








<sup>\*</sup>For retail or wholesale, you can buy accessories seprately,零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively prope vely proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

# 6537PM

PRISMATIC DIFFUSER UGR<19

棱晶防眩罩 眩光值<19

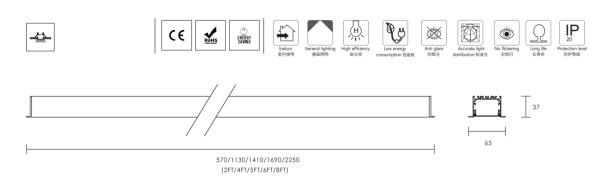

### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.  $\cdot$  Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR6537PM-600	570*65*37mm(2FT)	18W	2040Lm	1260Lm
LR6537PM-1200	1130*65*37mm(4FT)	36W	4080Lm	2520Lm
LR6537PM-1500	1410*65*37mm(5FT)	45W	6120Lm	3150Lm
LR6537PM-1800	1690*65*37mm(6FT)	54W	7140Lm	3780Lm
LR6537PM-2400	2250*65*37mm(8FT)	72W	8160Lm	5040Lm


### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI S Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

### LIGHT DISTRIBUTION CURVE 光强分布曲线







### CONTINUOUS 连接件

180° Extender 直连接件


T Shape Corner

T字形连接件

L Shape Corner L字形连接件

X Shape Corner 十字形连接件

### DETAIL 细节





### Accessories 配件








<sup>\*</sup>For retail or wholesale, you can buy accessories seprately,零售或批发,配件可单独购买。
\*For project, you can tell us what exactly you want, we will recommend relatively prope vely proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

# 9037P

OPAL DIFFUSER

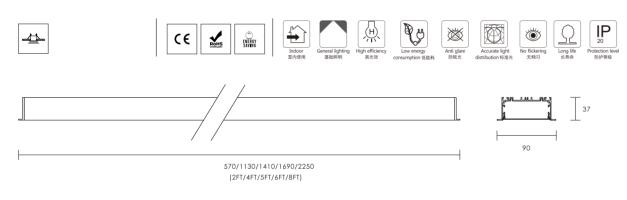

### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.  $\cdot$  Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR9037P-600	570*90*37mm(2FT)	18W	3060Lm	1800Lm
LR9037P-1200	1130*90*37mm(4FT)	36W	6120Lm	3600Lm
LR9037P-1500	1410*90*37mm(5FT)	45W	7650Lm	4500Lm
LR9037P-1800	1690*90*37mm(6FT)	54W	9180Lm	5400Lm
LR9037P-2400	2250*90*37mm(8FT)	72W	12240Lm	7200Lm


### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

### LIGHT DISTRIBUTION CURVE 光强分布曲线







### CONTINUOUS 连接件



180° Extender 直连接件




L Shape Corner L字形连接件



X Shape Corner 十字形连接件

### DETAIL 细节





### Accessories 配件








217

<sup>\*</sup>For retail or wholesale, you can buy accessories seprately,零售或批发,配件可单独购买。 \*For project, you can tell us what exactly you want, we will recommend relatively proper elatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

# 9037PM

PRISMATIC DIFFUSER UGR<19

棱晶防眩罩 眩光值<19

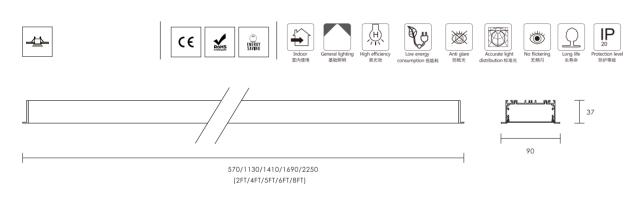

### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
  Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps,No screw to be appeared,No light leak.
- · High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- $\cdot$  High efficiency PC and even light distribution, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DAL调光、调色温驱动电源。
- F-10V焖光、DALI焖光、焖巴温驱动电源。 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR9037PM-600	570*90*37mm(2FT)	18W	3060Lm	1800Lm
LR9037PM-1200	1130*90*37mm(4FT)	36W	6120Lm	3600Lm
LR9037PM-1500	1410*90*37mm(5FT)	45W	7650Lm	4500Lm
LR9037PM-1800	1690*90*37mm(6FT)	54W	9180Lm	5400Lm
LR9037PM-2400	2250*90*37mm(8FT)	72W	12240Lm	7200Lm


### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

### LIGHT DISTRIBUTION CURVE 光强分布曲线







### CONTINUOUS 连接件

# 1100

180° Extender 直连接件

L Shape Corner




T Shape Corner T字形连接件



X Shape Corner 十字形连接件

### DETAIL 细节





### Accessories 配件







<sup>\*</sup>For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。

9037 P 219

<sup>\*</sup>For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。






1. RedBull Offices | Architecture: Mussa Arquitectos.






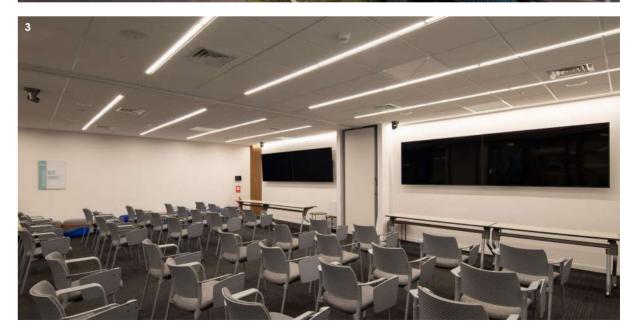


BCI Pagos Offices | Architecture: | Lighting Design: | 2. Indura Offices | Architecture: Armas Elton Arquitectos. | Lighting Design: Diseño de Luz.
 Novo Nordisk | Architecture: FMZ Arquitectura | Lighting Design: Docevolts-Francisca Nicoletti





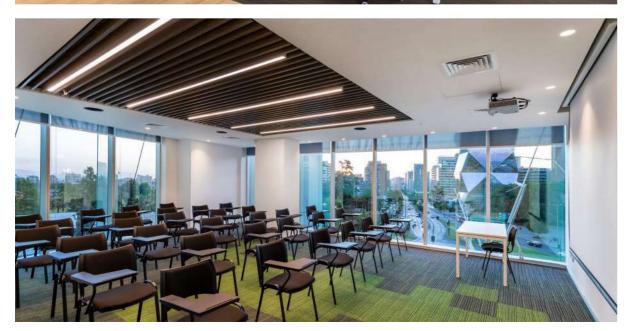



1. Forus Offices | Architecture: Armas Elton Arquitectos | Lighting Design: Diseño de Luz. | 2. Novo Nordisk | Architecture: FMZ Arquitectura. | Lighting Design: Docevolts-Francisca Nicoletti.
3. Indura Offices | Architecture: Armas Elton Arquitectos | Lighting Design: Diseño de Luz.

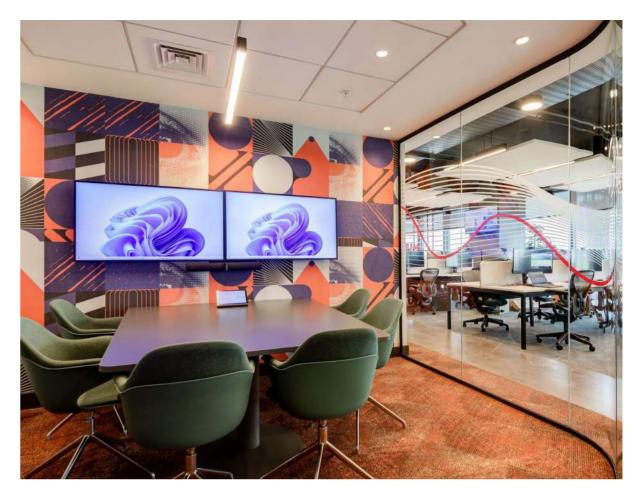



1. Murex Offices | Architecture and Lighting Design: Collective Architecture. | 2. IGS Group Offices | Architecture: Elton y Leniz Arquitectos | Lighting Design: LEVO Studio.

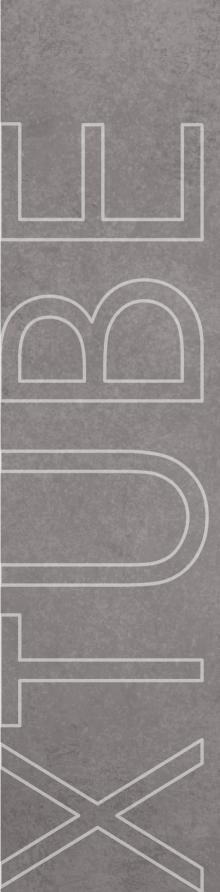

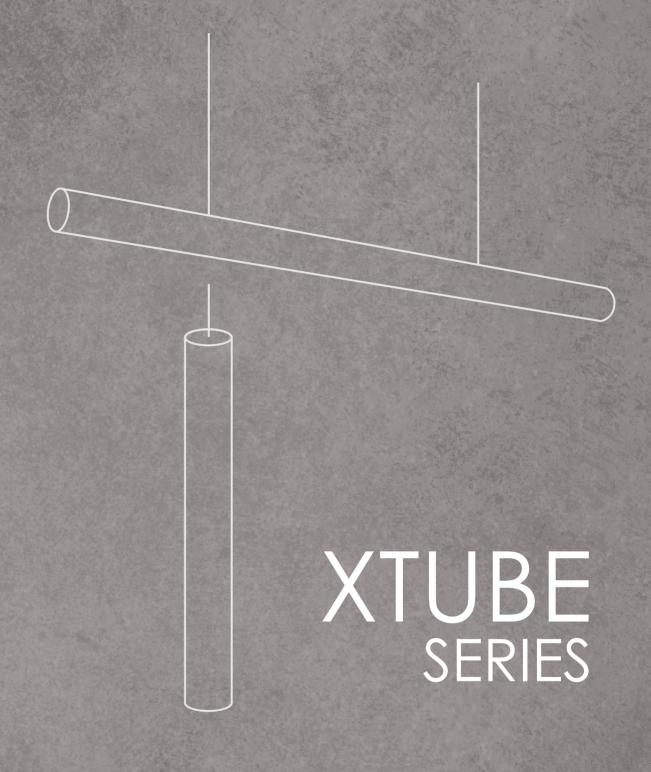

HORIZONTAL SUSPENSION VERTICAL SUSPENSION

# XTUBE SERIES

HORIZONTAL SUSPENSION | VERTICAL SUSPENSION

Designed as a tubular LED profile, XTUBE creates an impressive 360° or 270° lighting effect, delivering both functionality and unique visual impact.

Its versatile design allows horizontal or vertical suspension, adapting seamlessly to different architectural concepts.

Available in various sizes, it offers flexible solutions for any type of project, from technical applications to bold and out-of-the-box designs.











### 270DEGREE-ILLUMINATING

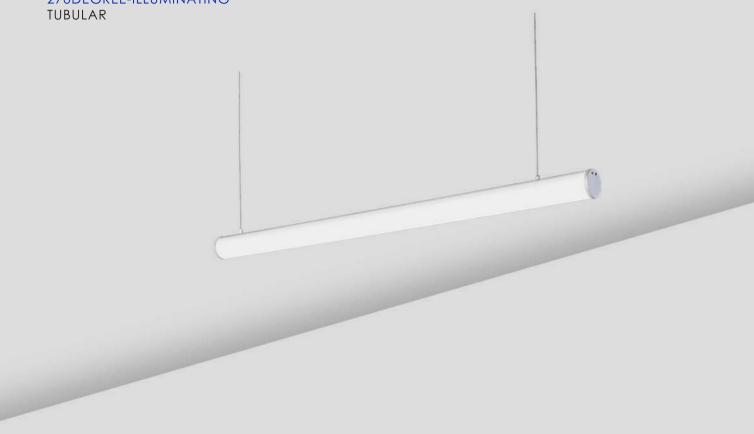

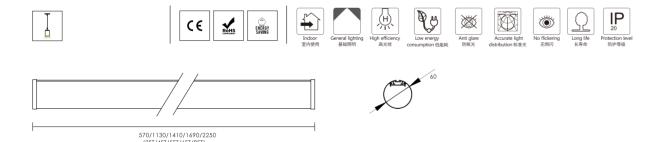

### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- $\cdot$  Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Plastic end-caps,No screw to be appeared,No light leak. High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- $\cdot \, \text{High efficiency PC and even light distribution,} \\ \text{no shawdon,} \\ \text{anti-glare}$ feature, easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 型料端盖,灯具线条硬制美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

### TECHNICAL DATA 技术参数





Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LT60-600	570*D60mm(2FT)	18W	3060Lm	1800Lm
LT60-1200	1130*D60mm(4FT)	36W	6120Lm	3600Lm
LT60-1500	1410*D60mm(5FT)	45W	7650Lm	4500Lm
LT60-1800	1690*D60mm(6FT)	54W	9180Lm	5400Lm
LT60-2400	2250*D60mm(8FT)	72W	12240Lm	7200Lm


### PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor








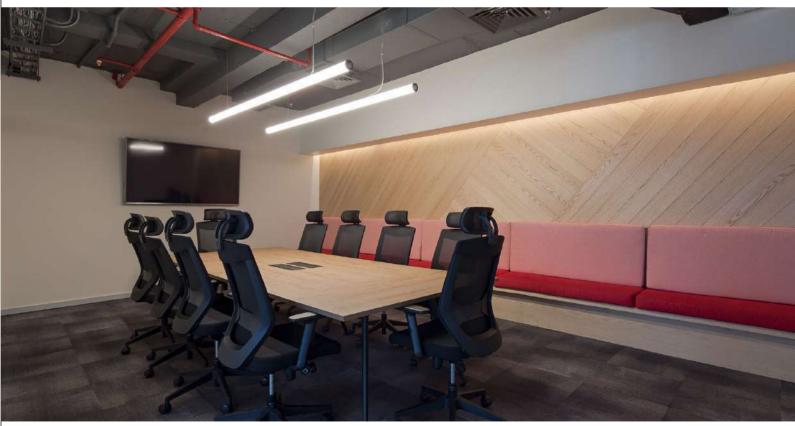





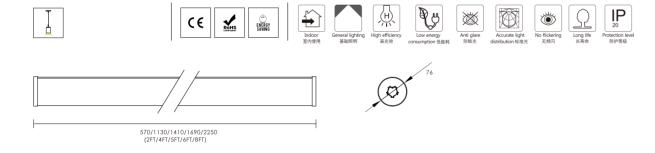

### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- · Options for 1-10V dimming, dali dimming and color changing driver.  $\cdot$  Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Plastic end-caps,No screw to be appeared,No light leak.
- High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- $\cdot \, \text{High efficiency PC and even light distribution,} \\ \text{no shawdon,} \\ \text{anti-glare}$ feature, easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 型料端盖,灯具线条硬制美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

### TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LT80-600	570*D80mm(2FT)	18W	3060Lm	1800Lm
LT80-1200	1130*D80mm(4FT)	36W	6120Lm	3600Lm
LT80-1500	1410*D80mm(5FT)	45W	7650Lm	4500Lm
LT80-1800	1690*D80mm(6FT)	54W	9180Lm	5400Lm
LT80-2400	2250*D80mm(8FT)	72W	12240Lm	7200Lm


### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI . Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

### LIGHT DISTRIBUTION CURVE 光强分布曲线











Launch Coworking Vespucio | Architecture: Launch Coworking.

233



# 270DEGREE-ILLUMINATING

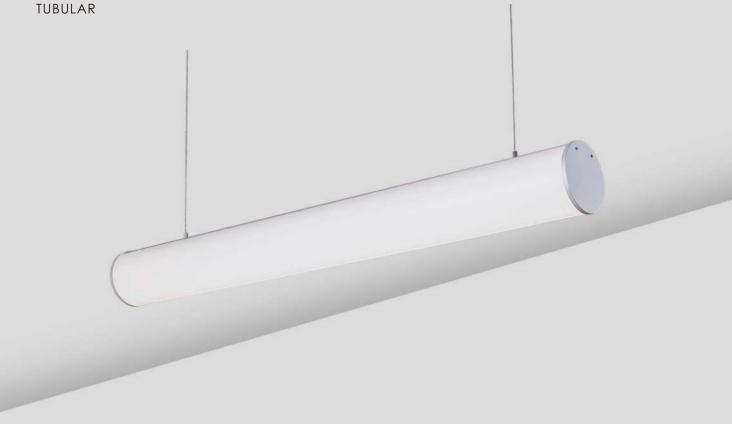





























### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- $\cdot$  Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Plastic end-caps,No screw to be appeared,No light leak. High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- · High efficiency PC and even light distribution, no shawdon, anti-glare feature, easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 型料端盖,灯具线条硬制美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好

### 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

### TECHNICAL DATA 技术参数





Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LT120-600	570*D120mm(2FT)	18W	3060Lm	1800Lm
LT120-1200	1130*D120mm(4FT)	36W	6120Lm	3600Lm
LT120-1500	1410*D120mm(5FT)	45W	7650Lm	4500Lm
LT120-1800	1690*D120mm(6FT)	54W	9180Lm	5400Lm
LT120-2400	2250*D120mm(8FT)	72W	12240Lm	7200Lm


### PRODUCT OPTION 可选产品配置

ССТ	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor







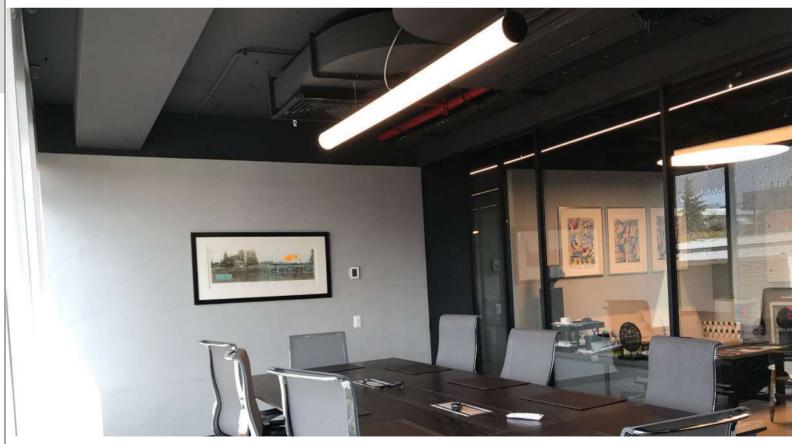


IGS GROUP Offices | Architecture: Elton y Leniz Arquitectos | Lighting Design: LEVO Studio.





1.Showroom Sien Kitchen | Architecture: Sien Kitchen.
 2. Launch Coworking Vespucio | Architecture: Launch Coworking.

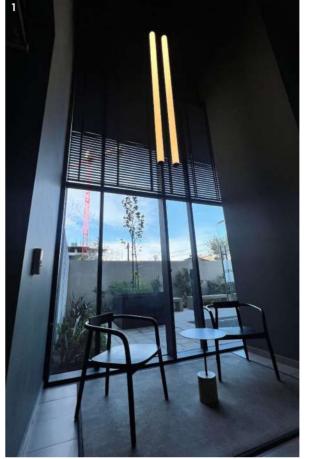









 $1. \ \, \text{Building Hall} \, | \, \text{Architecture and Design: Orlando Gatica Studio} \, | \, 2. \, \text{MUREX Offices} \, | \, \, \text{Architecture and Lighting Design: Collective Architecture.} \\$ 

3. JRI Investigation Center | Architecture: Toro & Sitja . 4. GLOBANT Offices | Architecture and Lighting Design: Ael Spaces.

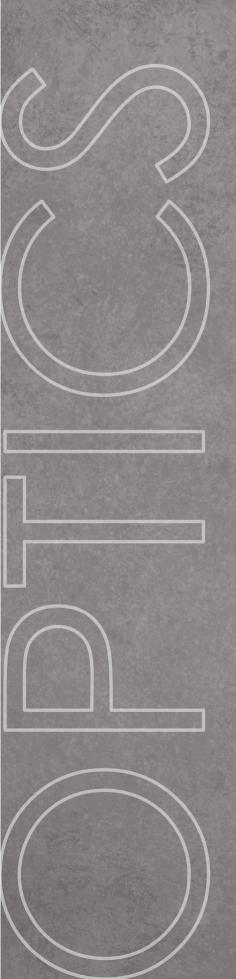

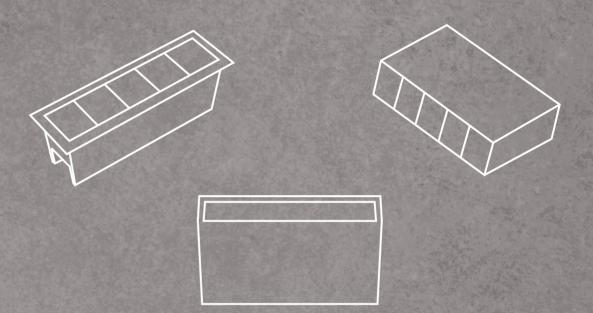

# OPTICS SERIES

SURFACE | RECESSED | WALL WASHER

# **OPTICS SERIES**

SURFACE | RECESSED | WALL WASHER


With its minimal design and advanced optics technology, OPTICS is a versatile solution for both surface and recessed mounting, integrating seamlessly with architecture.

Thanks to its high-performance lenses, this series is ideal for high-ceiling spaces as well as residential or institutional projects, offering adaptability to diverse requirements. It is available with asymmetric optics for striking wall washer effects or symmetric optics for uniform general lighting, making it suitable for a wide range of applications.

Available in three different lengths, OPTICS combines anti-glare comfort, elegance, and technical precision, turning light into a tool to elevate every project.






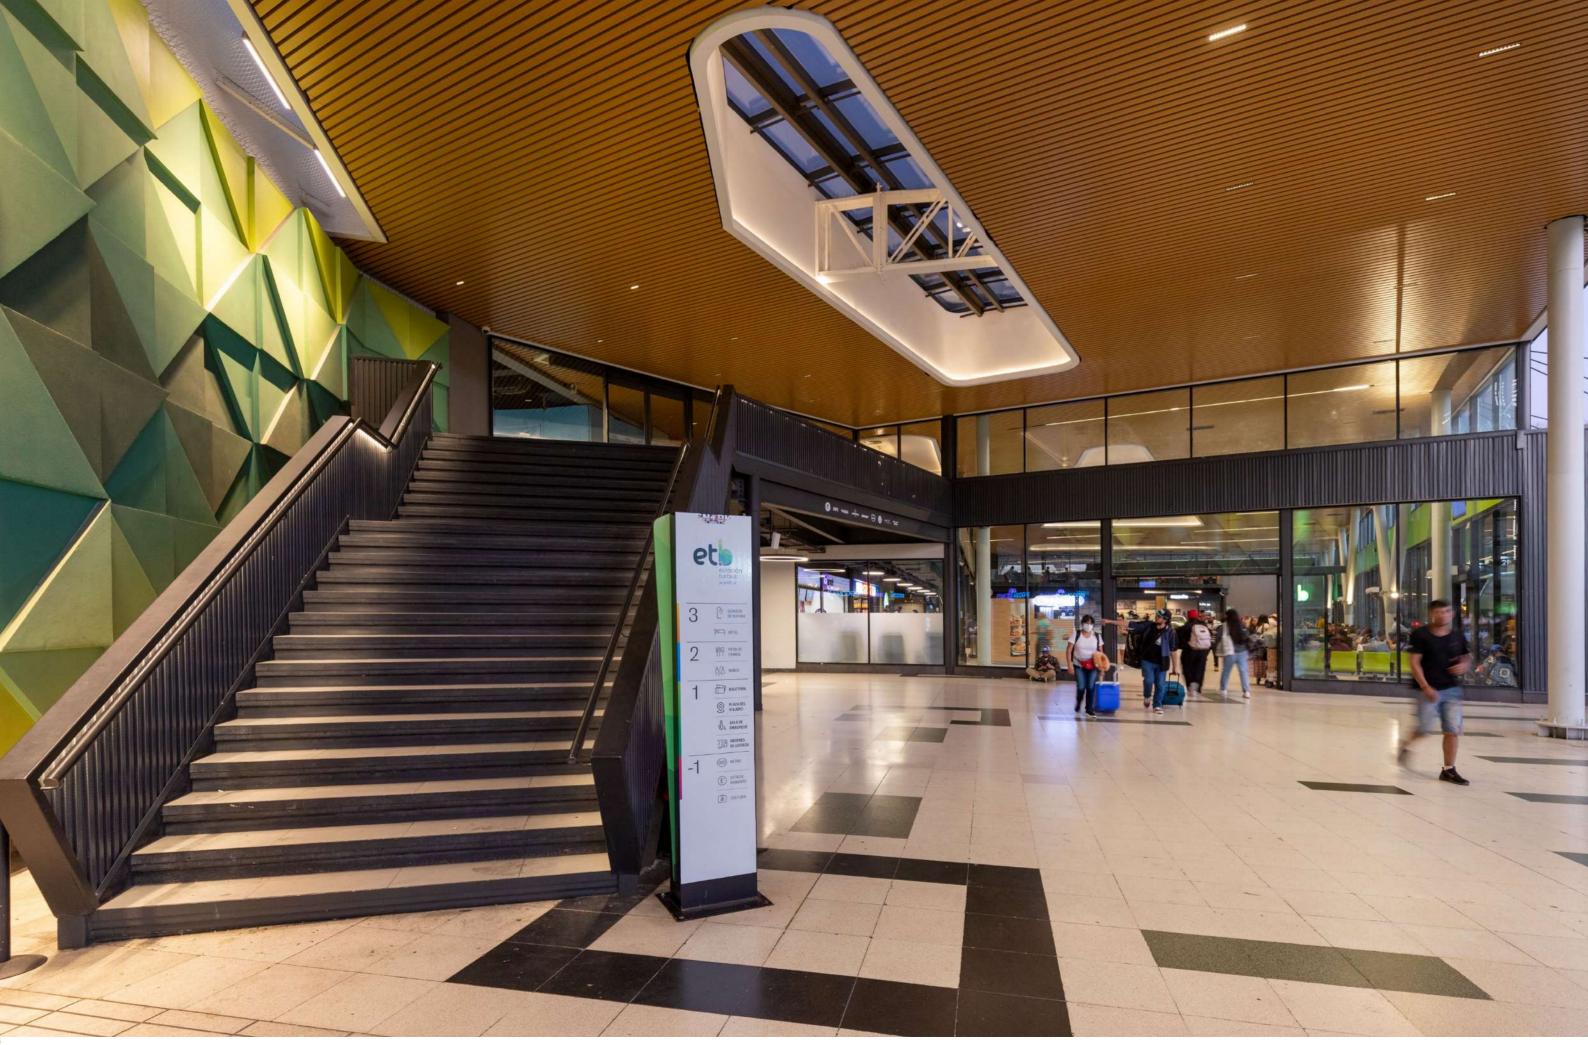

# 3580H1

ONE OPTIC MODULE

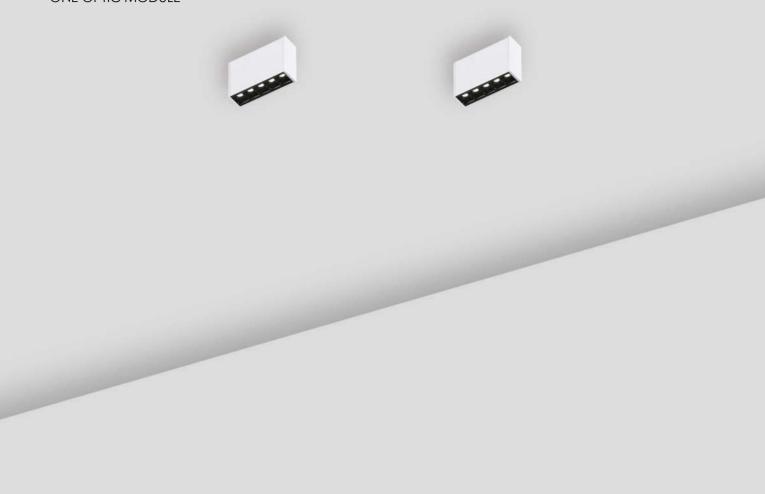






























### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency optic lens,} no \ \text{shawdon,} anti-glare \ feature,} easy \ installation$ to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


### TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
$\perp$	LC3580H1	138*35*80mm(5.4")	5W	700Lm	450Lm


### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

### DETAIL 细节



### LIGHT DISTRIBUTION CURVE 光强分布曲线

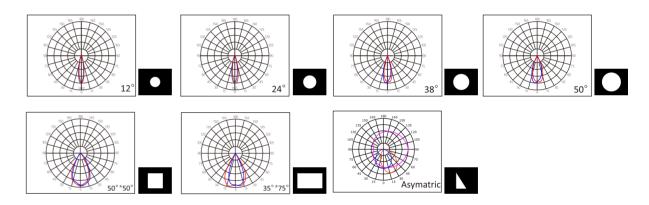

245

# 3580H2

TWO OPTIC MODULE































### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- · High efficiency optic lens, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 光学透镜,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


### TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LC3580H2	270*35*80mm(10.6")	10W	1400Lm	900Lm

### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI • Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

### DETAIL 细节



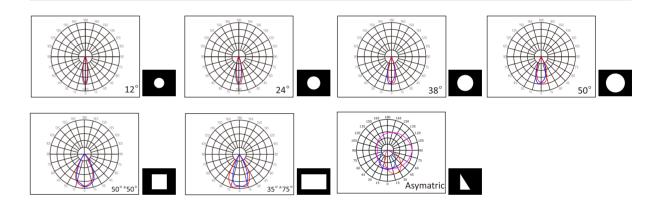

# 3580H3 THREE OPTIC MODULE



























### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost. · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- · High efficiency optic lens, anti-glare feature, easy installation to any
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


### TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LC3580H3	408*35*80mm(10.3")	15W	2100Lm	1260Lm

### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

### DETAIL 细节



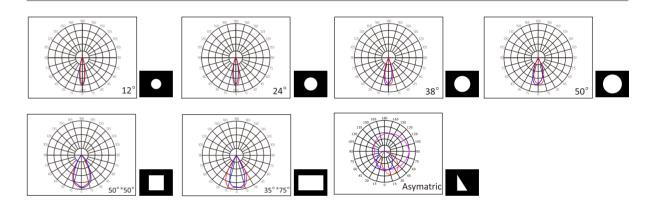








Magasich Offices | Architecture: Francisco Vivanco. | Lighting Design: Diseño de Luz.

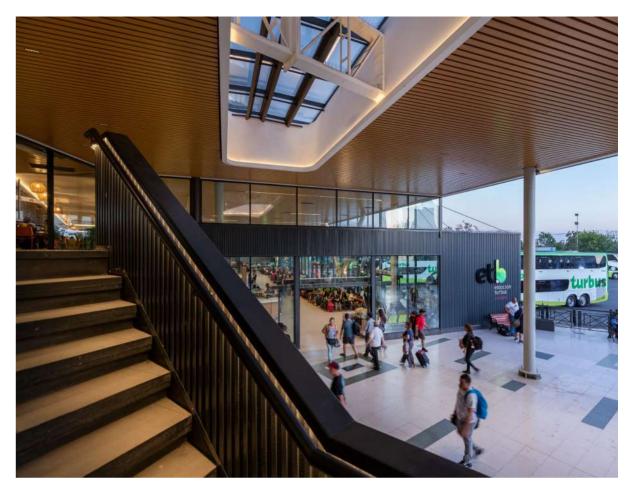




TURBUS Bus Station | Architecture: Estudio FES. | Lighting Design: Diseño de Luz.



BNP Paribas Cardif | Architecture and Lighting Design: Grupo E.

ASYMMETRIC MODULE



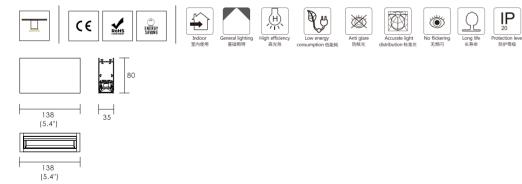

### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost.
- $\cdot \, {\sf Distinguished \, end\text{-} caps}, {\sf No \, screw \, to \, be \, appeared}, {\sf No \, light \, leak}.$
- · High grade aluminum, high quality surface painting.
- Fast and easy connection with no shadow.
- $\cdot \mbox{ High efficiency optic lens,} \mbox{no shawdon,} \mbox{anti-glare feature,} \mbox{easy installation to any shape.}$
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DALI调光、调色温驱动电源。
- 7-10V调光、DALI调光、调巴温驱动电源。 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


### TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LC3580W1	138*35*80mm(5.4")	5W	700Lm	450Lm


### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 🛂 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

### DETAIL 细节







TWO ASYMMETRIC MODULE
































### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost. · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- · High efficiency optic lens, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 光学透镜,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


## TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LC3580W2	270*35*80mm(10.6")	10W	1400Lm	900Lm


### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

### DETAIL 细节







THREE ASYMMETRIC MODULE











80
















### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost. · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- Fast and easy connection with no shadow.
- · High efficiency optic lens, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 光学透镜,出光均匀,防炫效果好

### 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


### TECHNICAL DATA 技术参数

٦	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
4	LC3580W3	408*35*80mm(10.3")	15W	2100Lm	1260Lm


### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI • Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

### DETAIL 细节













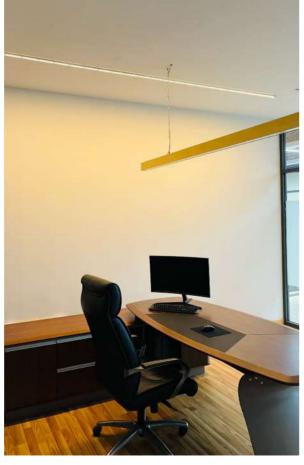

1. Artesania de Chile Store | Lighting Design: Antonia Peon 3. | 2. Vista Libre Offices | Architecture: PUA Diseño. | Lighting Design: MA Studio. 3. CROMATIX Factory Offices | Lighting Design: CROMATIX.

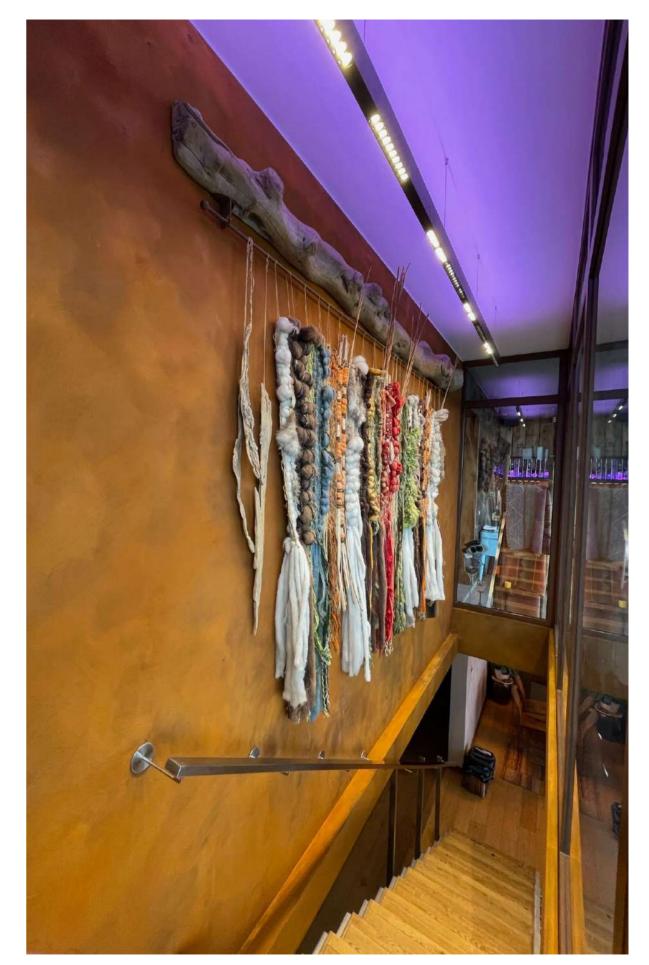

Residential Project | Lighting Design: Luminova team.

# 4737H1

ONE OPTIC MODULE







































### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost. · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- · High efficiency optic lens, anti-glare feature, easy installation to any
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,出光均匀,防炫效果好

### 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


### TECHNICAL DATA 技术参数


	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
-	LR4737H1	150*47*37mm(5.9")	5W	700Lm	450Lm

### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

### DETAIL 细节



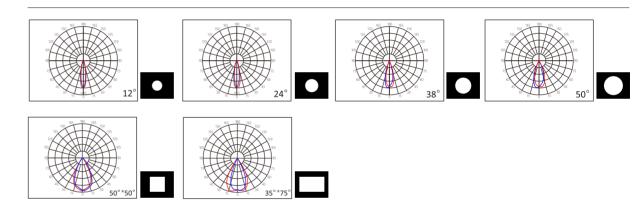

# 4737H2

### TWO OPTICS MODULE







264






























### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak. High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- · High efficiency optic lens, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,出光均匀,防炫效果好

### 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


### TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
$\square$	LR4737H2	283*47*37mm(11.1")	10W	1400Lm	900Lm


### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI • Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor


### DETAIL 细节



### LIGHT DISTRIBUTION CURVE 光强分布曲线

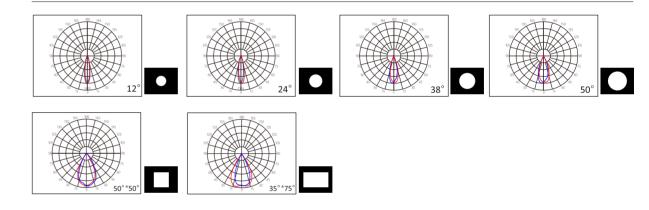

265

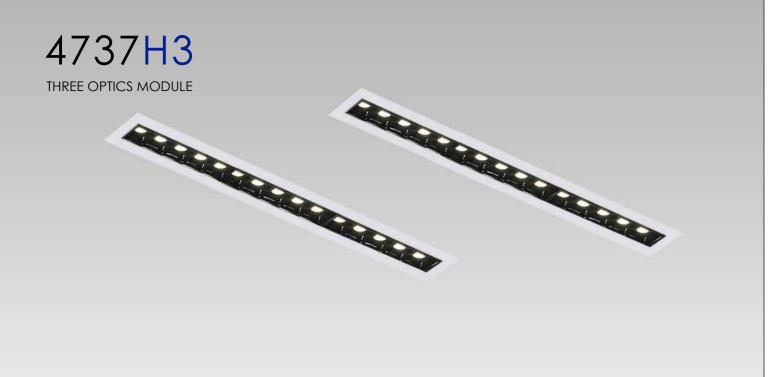



266



























### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost. · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- · High efficiency optic lens, anti-glare feature, easy installation to any
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


### TECHNICAL DATA 技术参数


	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
$\perp$	LR4737H3	415*47*37mm(16.3")	15W	2100Lm	1350Lm

### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI • Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

### DETAIL 细节



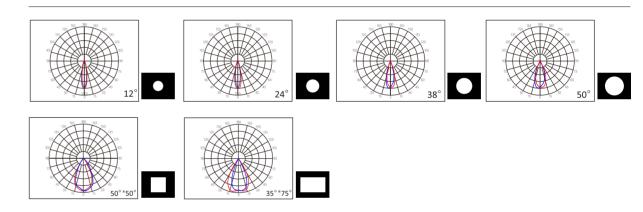

Asymmetric



































### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost. · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- · High efficiency optic lens, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,出光均匀,防炫效果好

### 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


### TECHNICAL DATA 技术参数

٦	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
4	LR4737W1	150*47*37mm(5.9")	5W	700Lm	450Lm


### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI • Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

### DETAIL 细节







Asymmetric




































### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost. · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- $\cdot$  Fast and easy connection with no shadow.
- · High efficiency optic lens, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。 光学透镜,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


### TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737W2	283*47*37mm(11.1")	5W	700Lm	450Lm


### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor


### DETAIL 细节







Asymmetric

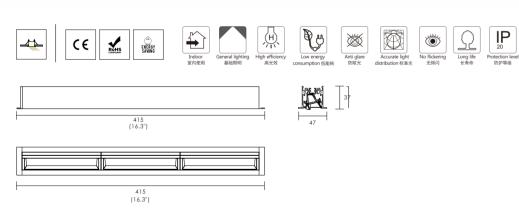

### PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost.
- $\cdot \, {\sf Distinguished} \, {\sf end\text{-}caps}, {\sf No} \, {\sf screw} \, {\sf to} \, {\sf be} \, {\sf appeared}, {\sf No} \, {\sf light} \, {\sf leak}.$
- · High grade aluminum, high quality surface painting.
- Fast and easy connection with no shadow.
- $\cdot$  High efficiency optic lens, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DALI调光、调色温驱动电源。
- 1-10V晌光、DALI响光、响巴温驱动电源。 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,出光均匀,防炫效果好

应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


### TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737W3	413*47*37mm(16.3")	5W	700Lm	450Lm


### PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 🔒 Color Changing
Emergency	□ None □ 1.5 hours,half power
Sensor	□ None □ Motion and daylight sensor

### DETAIL 细节















1. BUPA Las Condes | Architecture: Luis Villanueva | Lighting Design: Diseño de Luz | 2. Almasur Providencia Hotel | Architecture: Del Campo-Labbé Arquitectos.
3. TURBUS Bus Station | Architecture: Estudio FES. | Lighting Design: Diseño de Luz. | 4. BNP Paribas Cardif | Architecture and Lighting Design: Grupo E.







1. BNP Paribas Cardif | Architecture and Lighting Design: Grupo E. | 2,3. Magasich Offices | Architecture: Francisco Vivanco. | Lighting Design: Diseño de Luz.










1,2. TURBUS Bus Station | Architecture: Estudio FES. | Lighting Design: Diseño de Luz. | 3. BNP Paribas Cardif | Architecture and Lighting Design: Grupo E.

4. Architecture: Larroulet Corbera Arquitectos | Lighting Design: Luz + Diseño - Gaspar Arenas.

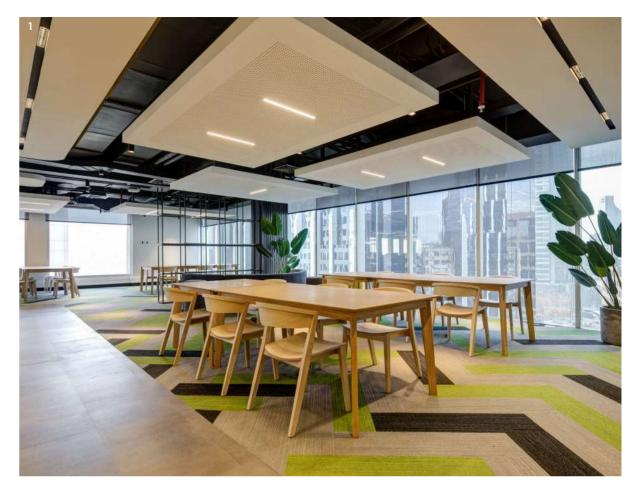



1,2: BNP Paribas Cardif | Architecture and Lighting Design: Grupo E.