


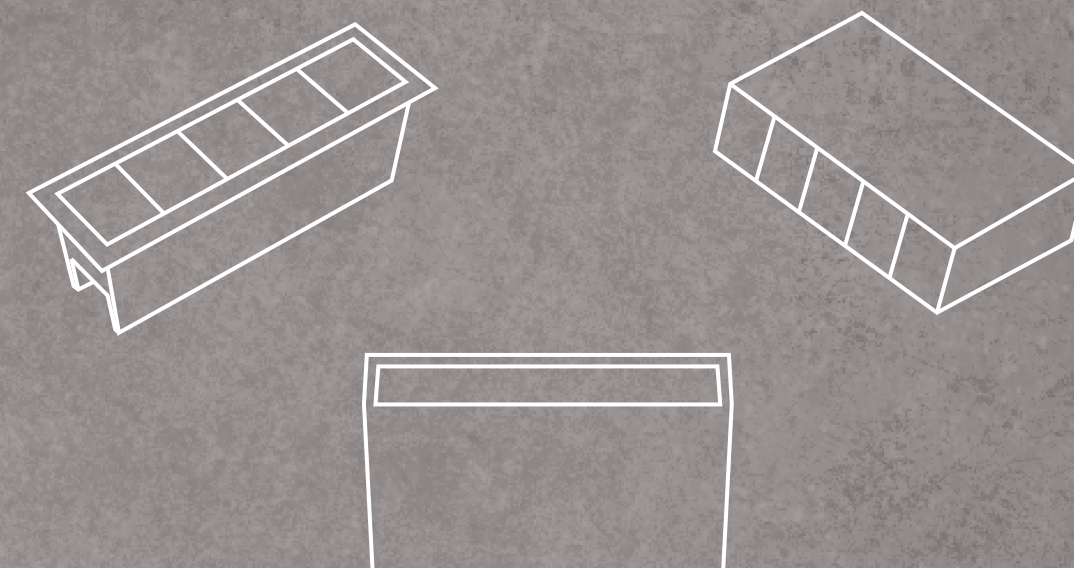

OPTICS SERIES

SURFACE | RECESSED |
WALL WASHER

OPTICS SERIES

SURFACE | RECESSED | WALL WASHER

With its minimal design and advanced optics technology, OPTICS is a versatile solution for both surface and recessed mounting, integrating seamlessly with architecture.

Thanks to its high-performance lenses, this series is ideal for high-ceiling spaces as well as residential or institutional projects, offering adaptability to diverse requirements. It is available with asymmetric optics for striking wall washer effects or symmetric optics for uniform general lighting, making it suitable for a wide range of applications.


Available in three different lengths, OPTICS combines anti-glare comfort, elegance, and technical precision, turning light into a tool to elevate every project.





3580H1

ONE OPTIC MODULE

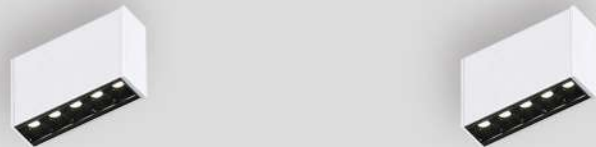

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Distinguished end-caps,No screw to be appeared.No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防炫效果好

应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	LC3580H1	138*35*80mm(5.4")	5W	700Lm	450Lm


PRODUCT OPTION 可选产品配置

CCT	3000K 4000K 5000K 6000K
CRI	82+ 90+ 95+
Finish	White Black Silver Custom Color
Dimming	On/off 1-10V DALI Color Changing
Emergency	None 1.5 hours,half power
Sensor	None Motion and daylight sensor

DETAIL 细节

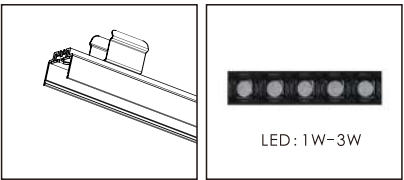


LIGHT DISTRIBUTION CURVE 光强分布曲线

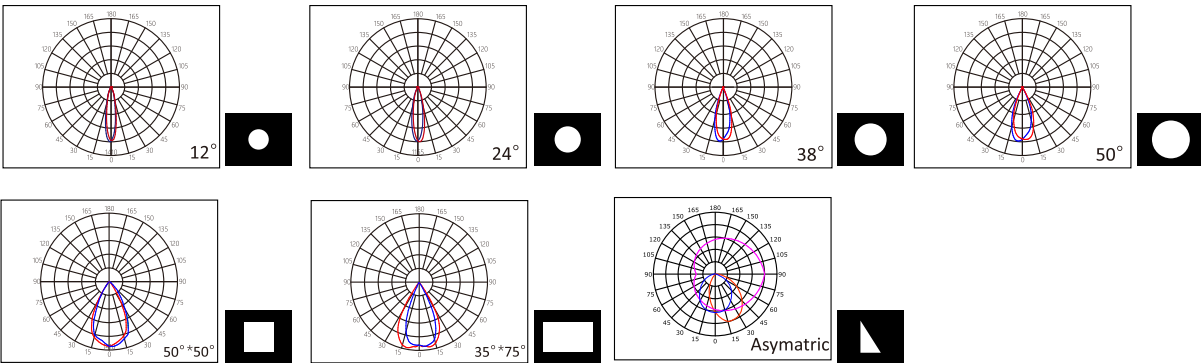

3580H2

TWO OPTIC MODULE

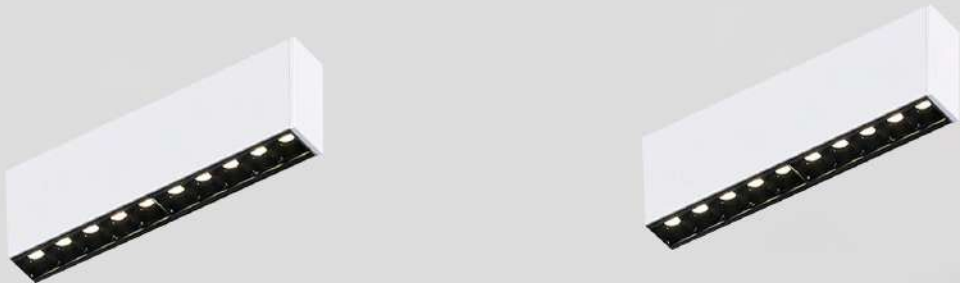


TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	LC3580H2	270*35*80mm(10.6")	10W	1400Lm	900Lm




PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DETAIL 细节

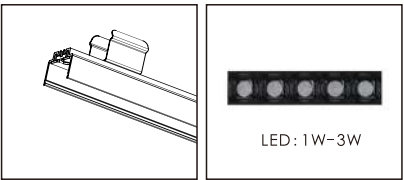

LIGHT DISTRIBUTION CURVE 光强分布曲线

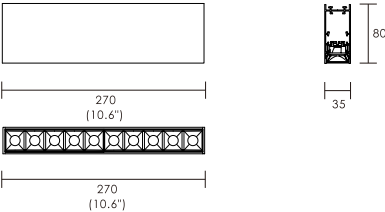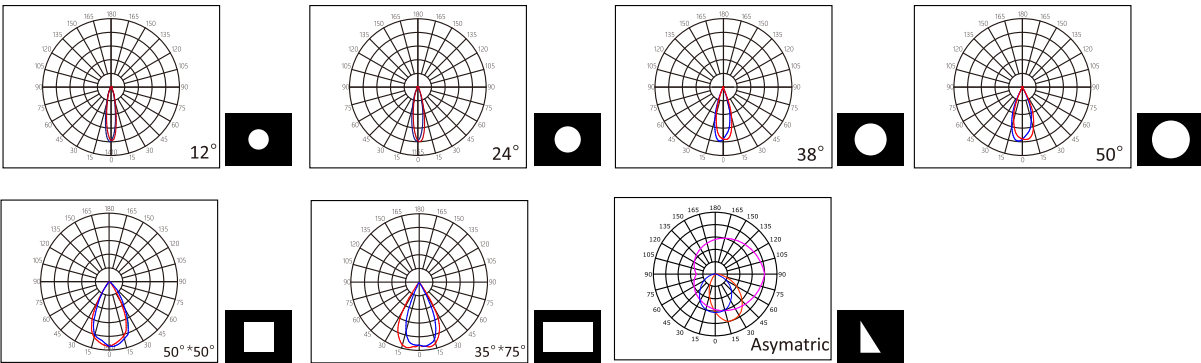

PRODUCT FEATURE 产品特点


- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Distinguished end-caps,No screw to be appeared.No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。光学透镜，出光均匀，防炫效果好

应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

3580H3

THREE OPTIC MODULE

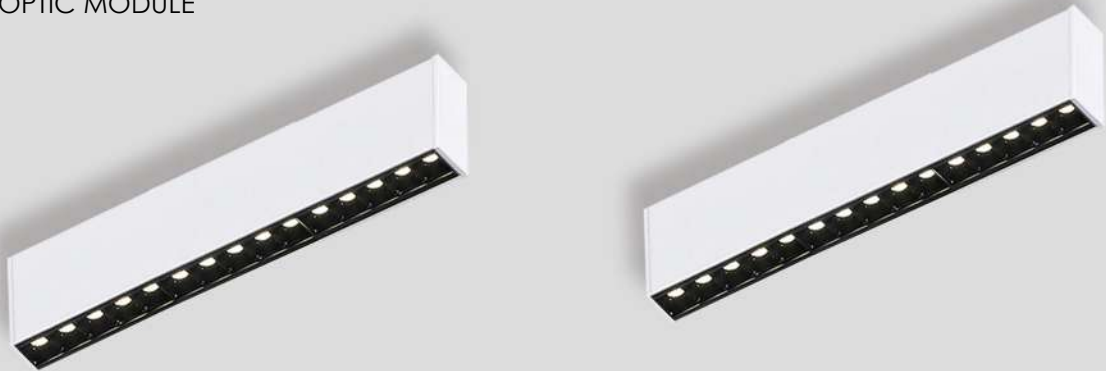


TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	LC3580H3	408*35*80mm(10.3")	15W	2100Lm	1260Lm




PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☒ 4000K ☒ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DETAIL 细节

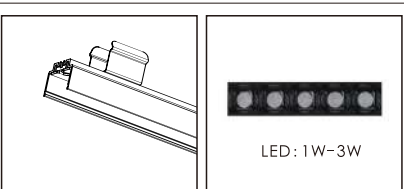

LIGHT DISTRIBUTION CURVE 光强分布曲线

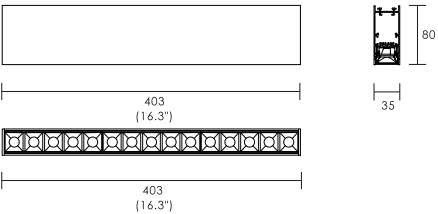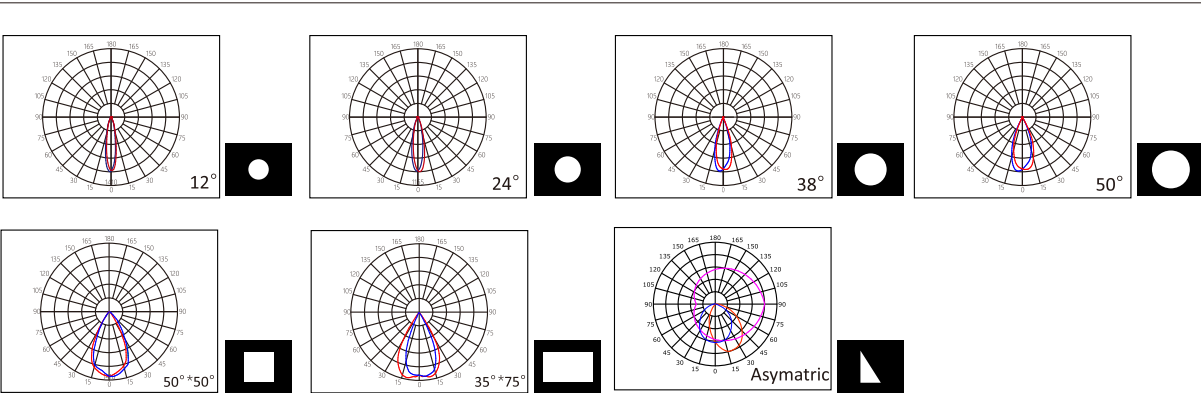

PRODUCT FEATURE 产品特点


- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Distinguished end-caps,No screw to be appeared.No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。光学透镜，出光均匀，防炫效果好

应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。



Magasich Offices | Architecture: Francisco Vivanco. | Lighting Design: Diseño de Luz.

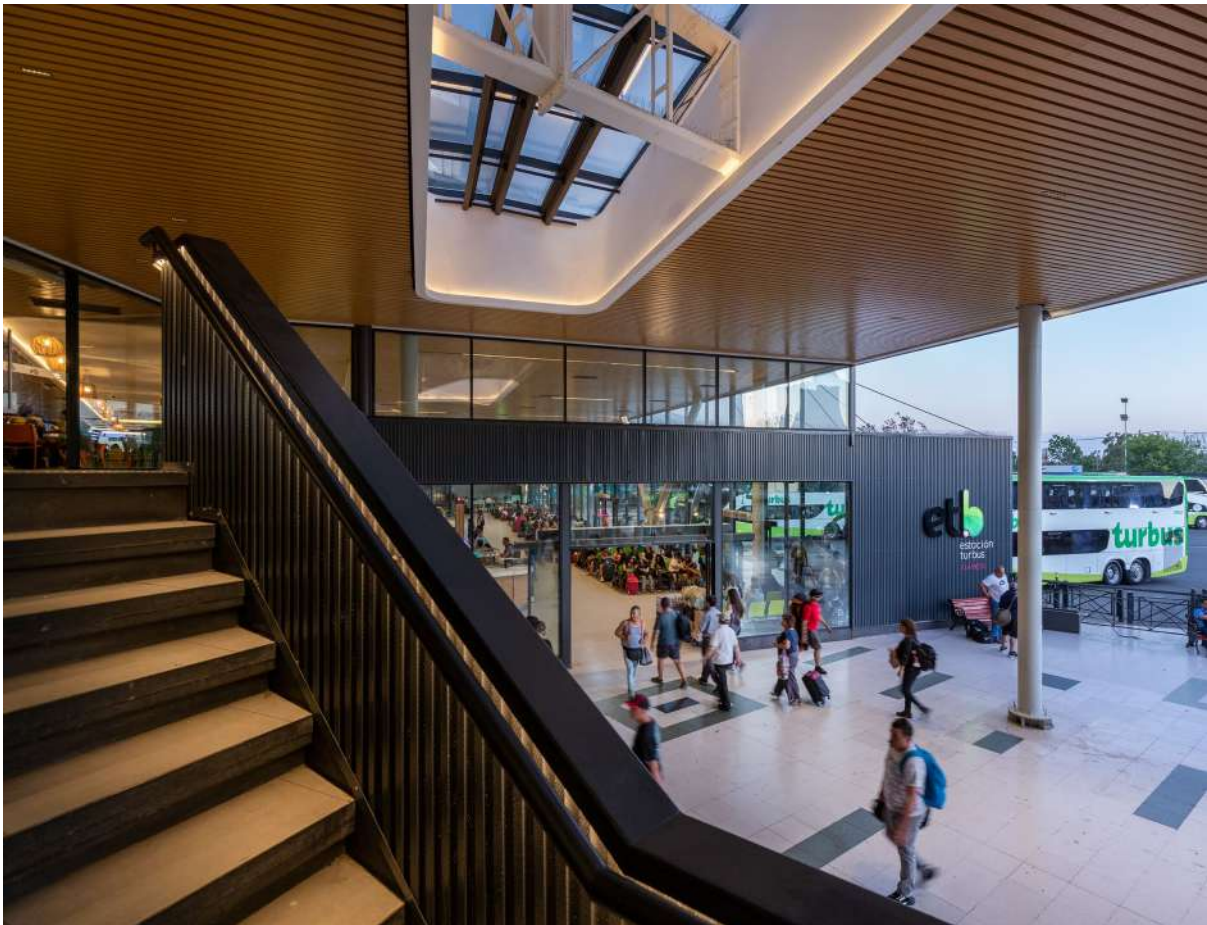


TURBUS Bus Station | Architecture: Estudio FES. | Lighting Design: Diseño de Luz.



3580W1

ASYMMETRIC MODULE

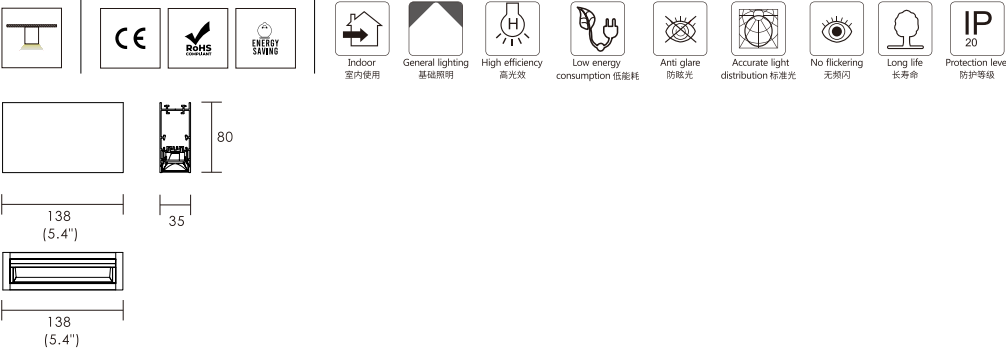

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Distinguished end-caps,No screw to be appeared.No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防炫效果好

应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

	Item No. 产品型号 LC3580W1	Dimension 产品型号 138*35*80mm(5.4")	Power 功率 5W	LED Output LED光通量 700Lm	System Output 灯具光通量 450Lm
--	---------------------------	-------------------------------------	----------------	----------------------------	------------------------------


PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DETAIL 细节

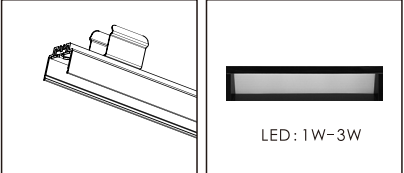


LIGHT DISTRIBUTION CURVE 光强分布曲线

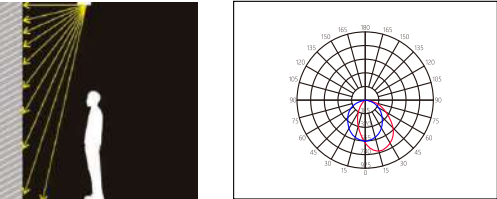

3580W2

TWO ASYMMETRIC MODULE

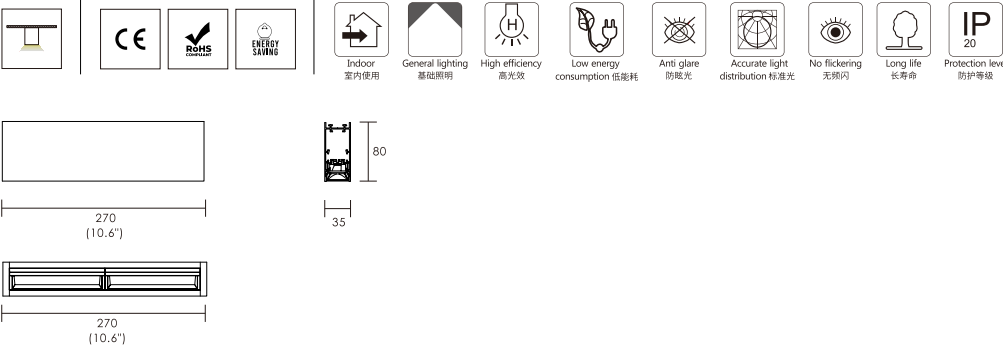

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Distinguished end-caps,No screw to be appeared.No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。光学透镜，出光均匀，防炫效果好

应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	LC3580W2	270*35*80mm(10.6")	10W	1400Lm	900Lm


PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DETAIL 细节

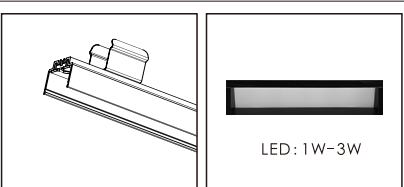


LIGHT DISTRIBUTION CURVE 光强分布曲线

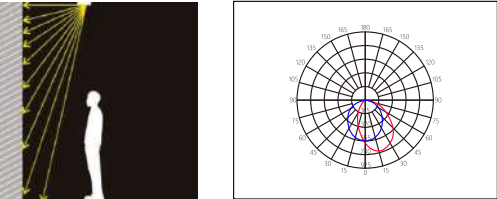

3580W3

THREE ASYMMETRIC MODULE

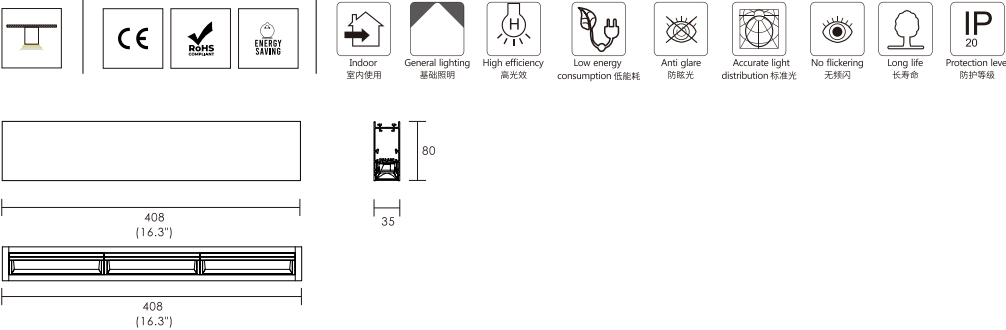

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Distinguished end-caps,No screw to be appeared.No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	LC3580W3	408*35*80mm(10.3")	15W	2100Lm	1260Lm


PRODUCT OPTION 可选产品配置


CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DETAIL 细节

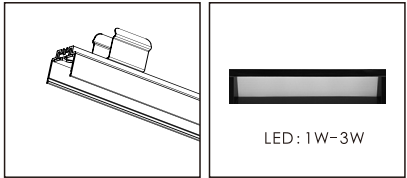

LIGHT DISTRIBUTION CURVE 光强分布曲线

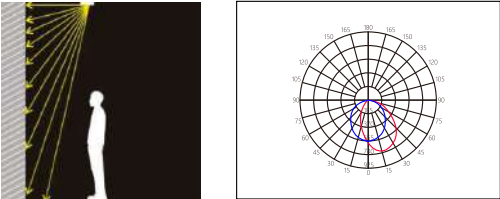

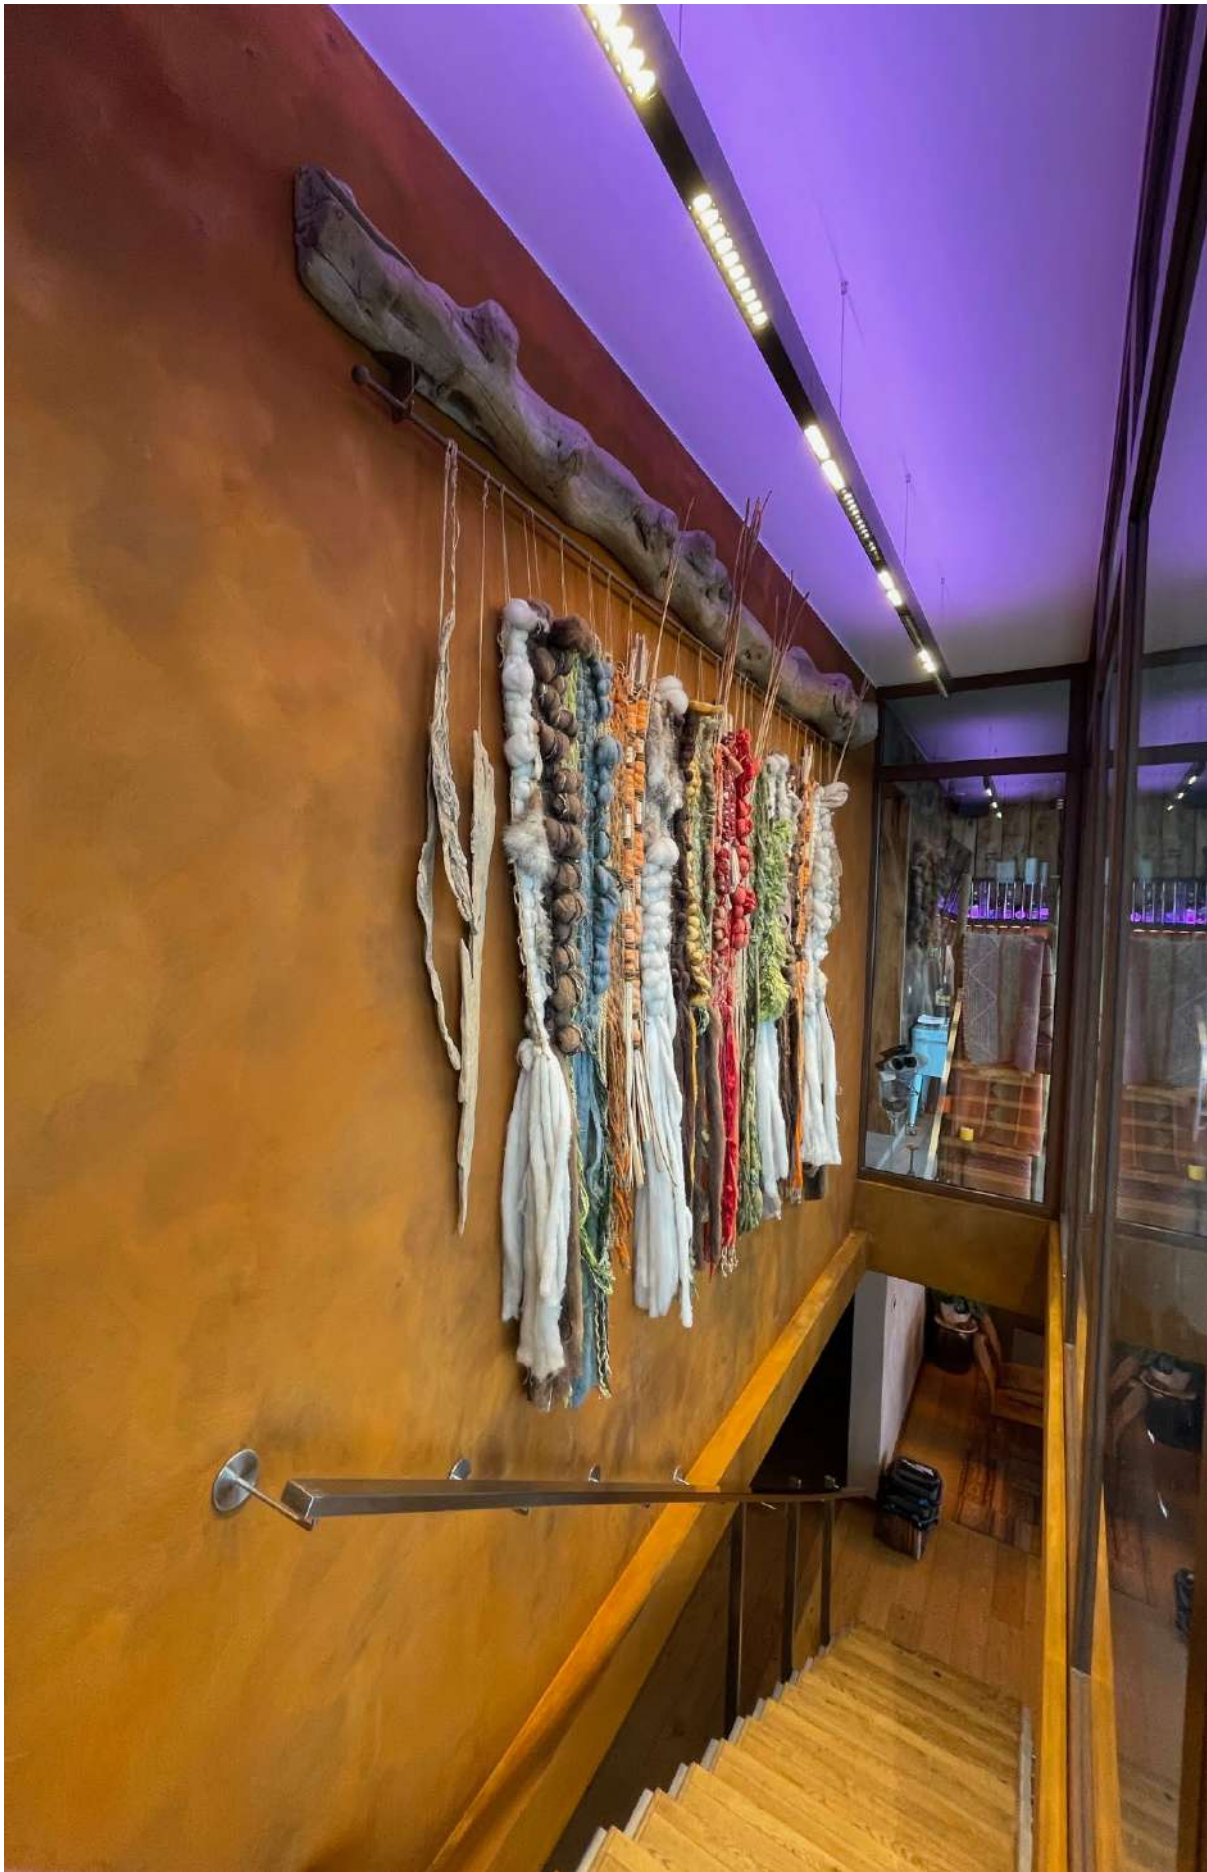

1.Artesania de Chile Store | Lighting Design: Antonia Peon 3. | 2. Vista Libre Offices | Architecture: PUA Diseño. | Lighting Design: MA Studio.
3. CROMATIX Factory Offices | Lighting Design: CROMATIX.

Residential Project | Lighting Design: Luminova team.

4737H1

ONE OPTIC MODULE







Indoor
室内使用

General lighting
基础照明

High efficiency
高光效

Low energy
consumption 低能耗



Anti glare
防眩光


Accurate light
distribution 标准光

No flickering
无频闪

Long life
长寿命

Protection level
防护等级





PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Distinguished end-caps,No screw to be appeared.No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	LR4737H1	150*47*37mm(5.9")	5W	700Lm	450Lm


PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☒ 4000K ☒ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DETAIL 细节

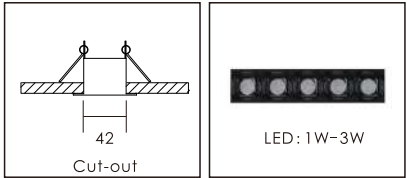

LIGHT DISTRIBUTION CURVE 光强分布曲线

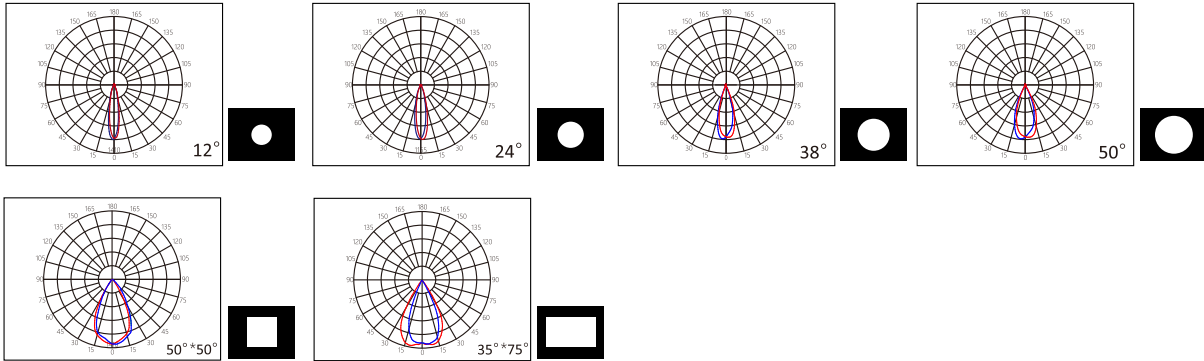

4737H2

TWO OPTICS MODULE



Indoor
室内使用

General lighting
基础照明

High efficiency
高光效

Low energy
consumption 低能耗

Anti glare
防眩光

Accurate light
distribution 标准光

No flickering
无频闪

Long life
长寿命

Protection level
防护等级

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Distinguished end-caps,No screw to be appeared.No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
光学透镜，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	LR4737H2	283*47*37mm(11.1")	10W	1400Lm	900Lm


PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DETAIL 细节

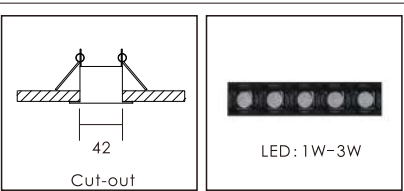

LIGHT DISTRIBUTION CURVE 光强分布曲线

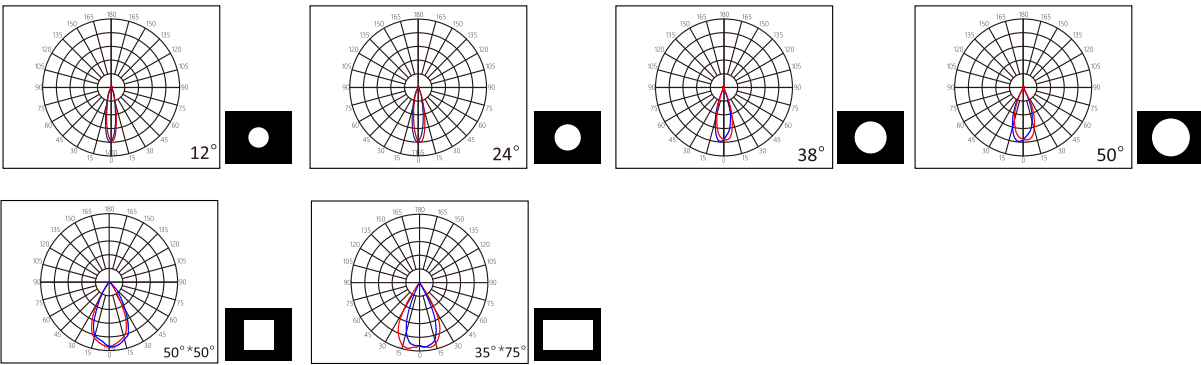

4737H3

THREE OPTICS MODULE




TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	LR4737H3	415*47*37mm(16.3")	15W	2100Lm	1350Lm



PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DETAIL 细节

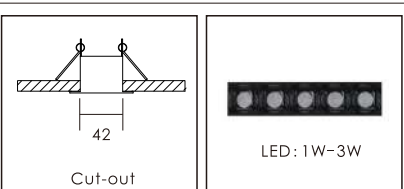

LIGHT DISTRIBUTION CURVE 光强分布曲线

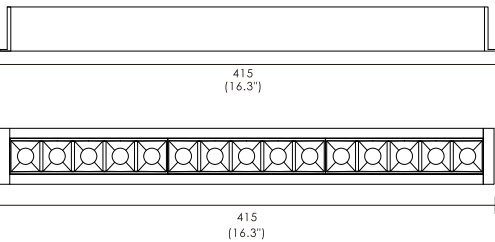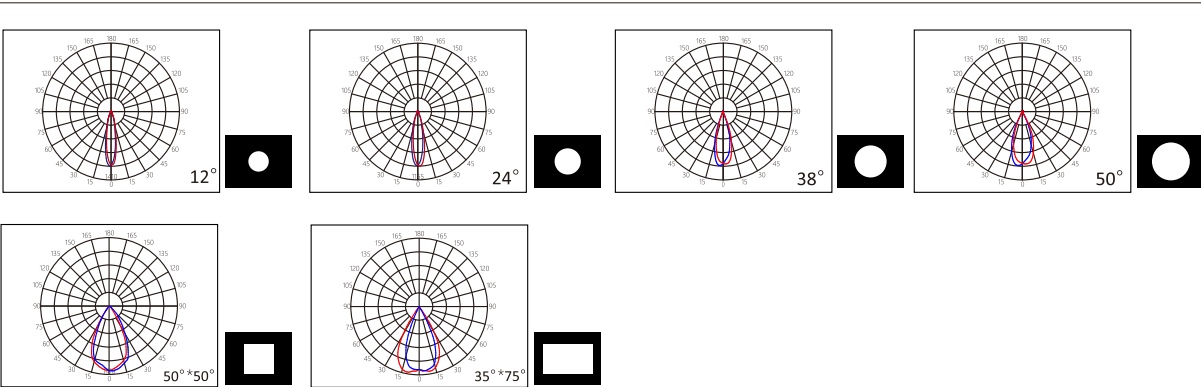

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Distinguished end-caps,No screw to be appeared.No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。光学透镜，出光均匀，防炫效果好

应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

4737W1

Asymmetric




TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	LR4737W1	150*47*37mm(5.9")	5W	700Lm	450Lm




PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DETAIL 细节

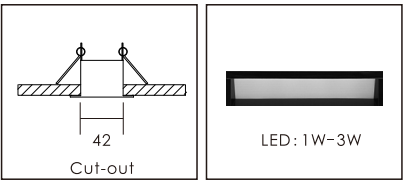

LIGHT DISTRIBUTION CURVE 光强分布曲线

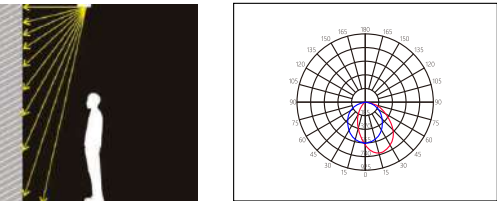

PRODUCT FEATURE 产品特点


- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Distinguished end-caps,No screw to be appeared.No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。光学透镜，出光均匀，防炫效果好

应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

4737W2

Asymmetric

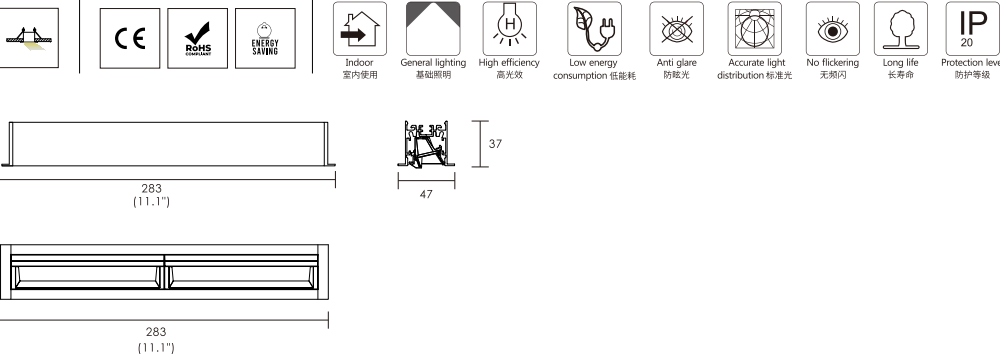

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Distinguished end-caps,No screw to be appeared.No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。光学透镜，出光均匀，防炫效果好

应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

	Item No. 产品型号 LR4737W2	Dimension 产品型号 283*47*37mm(11.1")	Power 功率 5W	LED Output LED光通量 700Lm	System Output 灯具光通量 450Lm
--	---------------------------	--------------------------------------	----------------	----------------------------	------------------------------


PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DETAIL 细节

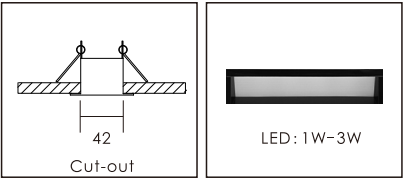

LIGHT DISTRIBUTION CURVE 光强分布曲线

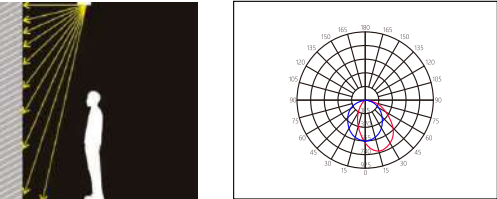

4737W3

Asymmetric




TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	LR4737W3	413*47*37mm(16.3")	5W	700Lm	450Lm



PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DETAIL 细节

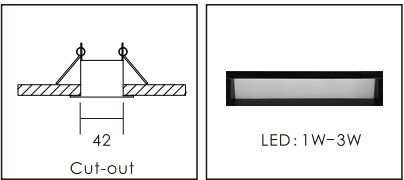

LIGHT DISTRIBUTION CURVE 光强分布曲线

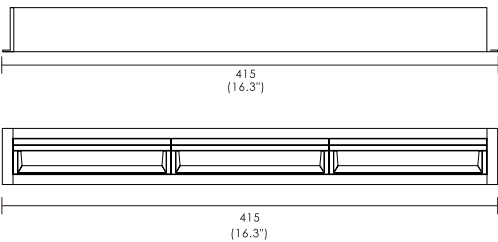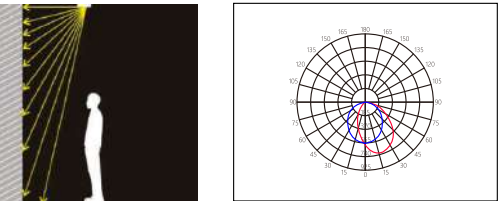

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Distinguished end-caps,No screw to be appeared.No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency optic lens,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。光学透镜，出光均匀，防炫效果好

应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。





1. BUPA Las Condes | Architecture: Luis Villanueva | Lighting Design: Diseño de Luz | 2. Almasur Providencia Hotel | Architecture: Del Campo-Labbé Arquitectos.
3. TURBUS Bus Station | Architecture: Estudio FES. | Lighting Design: Diseño de Luz. | 4. BNP Paribas Cardif | Architecture and Lighting Design: Grupo E.

1. BNP Paribas Cardif | Architecture and Lighting Design: Grupo E. | 2.3. Magasich Offices | Architecture: Francisco Vivanco. | Lighting Design: Diseño de Luz.



1,2. TURBUS Bus Station | Architecture: Estudio FES. | Lighting Design: Diseño de Luz. | 3. BNP Paribas Cardif | Architecture and Lighting Design: Grupo E.
4. Architecture: Larroulet Corbera Arquitectos | Lighting Design: Luz + Diseño - Gaspar Arenas.

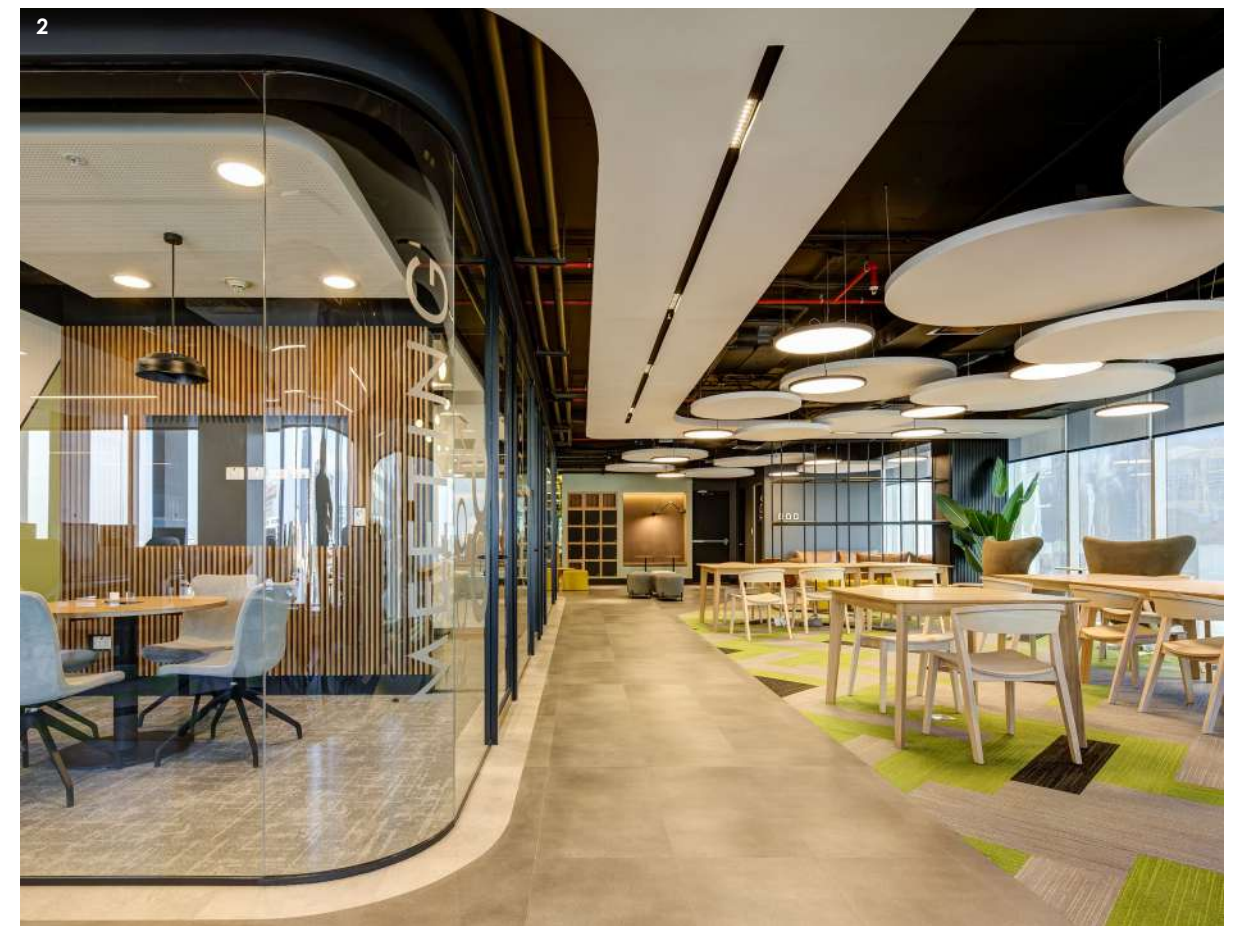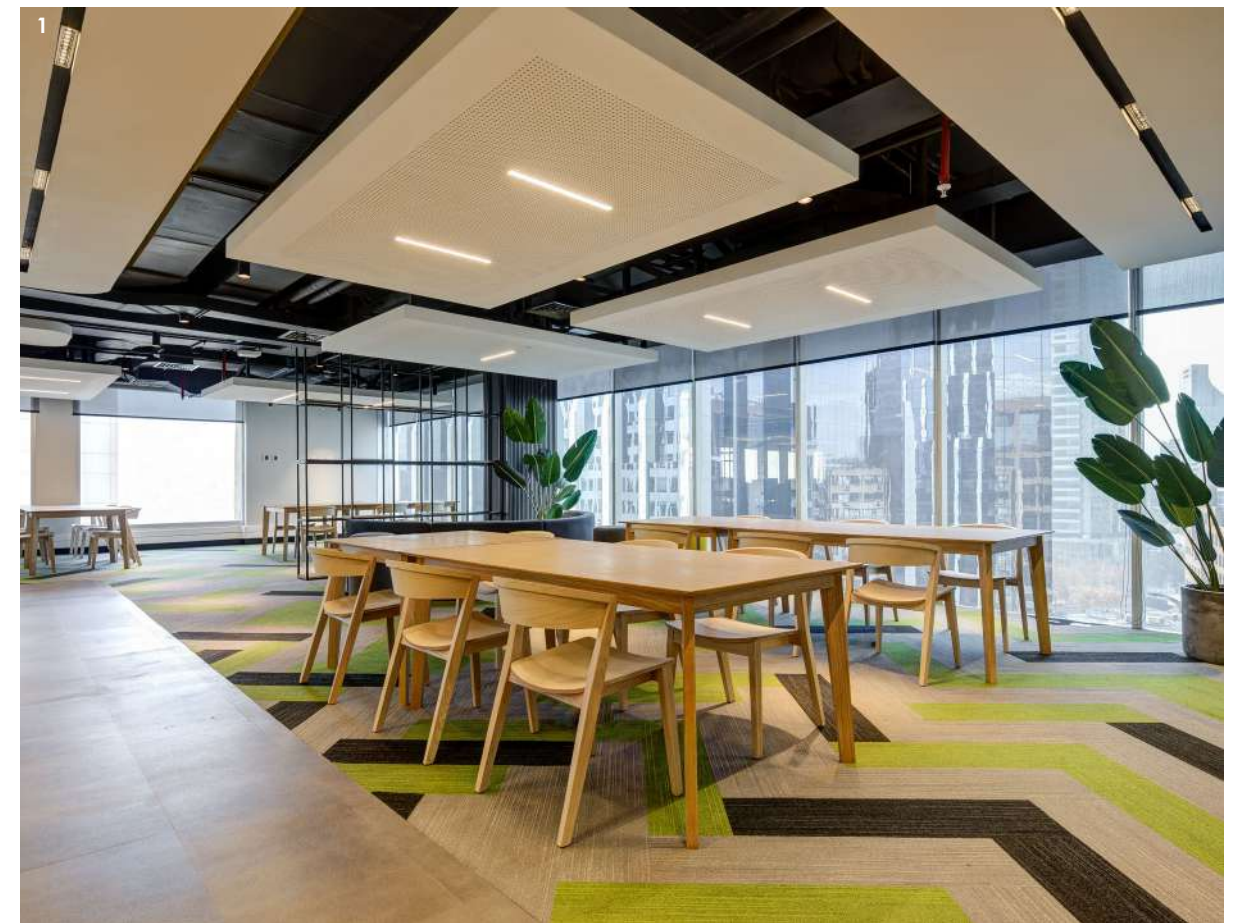

1,2. BNP Paribas Cardif | Architecture and Lighting Design: Grupo E.