

XLINE SERIES

SUSPENDED | SURFACE | RECESSED

XLINE SERIES

SURFACE | SUSPENDED

Elegant and versatile, XLINE in its surface and suspended version redefines architectural lighting with clean lines and refined performance. Designed in aluminum profiles with an integrated electronic driver, it offers multiple possibilities: opal or microprismatic diffusers, Eurostandard three-phase track electrification, or optical modules for focal lighting. A system where technical precision meets contemporary aesthetics, delivering powerful light while offering creative freedom to enhance interior architecture.

Its strength lies in flexibility: it can be used as a stand-alone luminaire or as part of a continuous line system, achieving high luminous levels and varied lighting effects. Thanks to its different connectors, XLINE also enables the creation of geometric shapes and unique compositions, transforming light into a creative tool for design and architecture.

More than a lighting profile, XLINE is a professional solution that combines efficiency, performance, and design versatility for projects that demand the best.







FAST CONNECTION

This system redefines simplicity with an effortless fast-connection technology. Its innovative slide-in and slide-out mechanism eliminates the need for screws and complex assembly, enabling a seamless plug-and-play installation that reduces setup time by up to 70% compared to traditional systems.

TOOL FREE

Designed for true convenience, the intuitive, tool-free system allows fixtures to snap into place effortlessly—no tools, no wiring complexity, and no technical expertise required. It brings speed, flexibility, and precision to every lighting configuration.

ONE CLICK


Engineered for secure and reliable performance, each module connects through an interlocking mechanism with a single click. This ensures perfect alignment, structural stability, and safe handling during installation.

NO LIGHT LEAKAGE

A refined connection system prevents light from escaping sideways, creating a continuous and uniform line of illumination. It enhances visual comfort and preserves the elegance of every space.

All these features make this system ideal for rapid customization across residential, commercial, and event lighting environments. Perfect for projects that demand speed, precision, and sophistication, it is also a premium choice for high-end architectural applications.



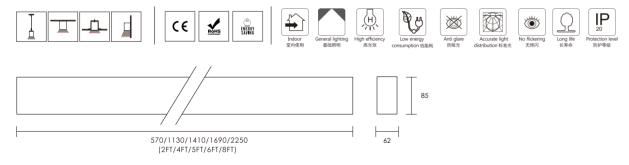

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6285P-600	570*62*85MM	18W	3060Lm	1800Lm
LS6285P-1200	1130*62*85MM	36W	6120Lm	3600Lm
LS6285P-1400	1400*62*85MM	45W	7650Lm	4500Lm
LS6285P-1800	1690*62*85MM	54W	9180Lm	5400Lm
LS6285P-2400	2250*62*85MM	72W	12240Lm	7200Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6285PU-600	570*62*85MM	27W	4590Lm	2700Lm
LS6285PU-1200	1130*62*85MM	54W	9180Lm	5400Lm
LS6285PU-1400	1400*62*85MM	63W	10710Lm	6300Lm
LS6285PU-1800	1690*62*85MM	81W	13770Lm	8100Lm
LS6285PU-2400	2250*62*85MM	108W	18360Lm	10800Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线







CONTINUOUS 连接件

180° Extender 直连接件

T Shape Corner

T字形连接件



L Shape Corner L字形连接件



X Shape Corner 十字形连接件

DETAIL 细节
























^{*}For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively prope nxyx。 y proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

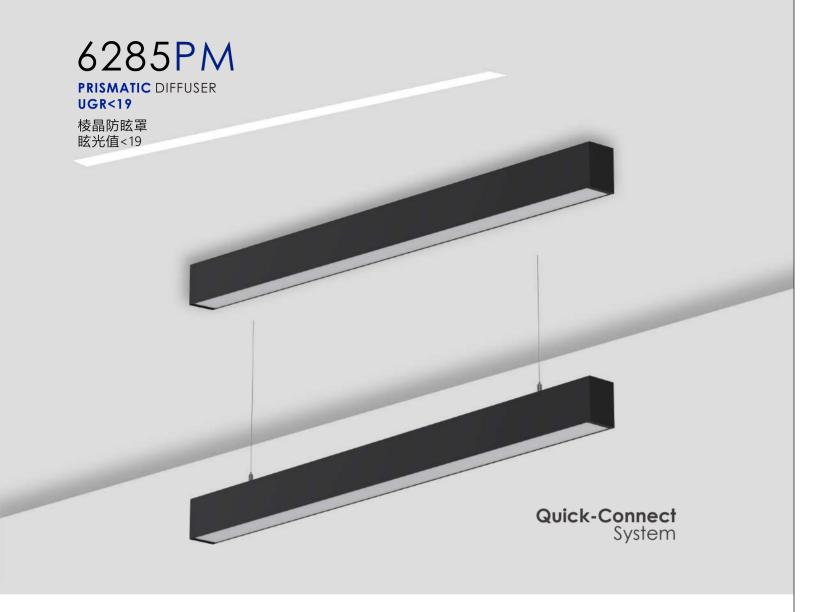

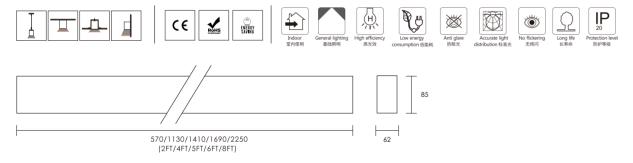

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
 Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- Fast and easy connection with no shadow.
- \cdot High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DAL调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




LED Output LED光通量 System Output 灯具光通量 Item No. 产品型号 Dimension 产品型号 570*62*85MM LS6285PMU-600 27W 4590l m 2700l m LS6285PMU-1200 1130*62*85MM 54W 9180Lm 5400Lm LS6285PMU-1400 1400*62*85MM 10710Lm 6300Lm 63W LS6285PMU-1800 1690*62*85MM 81W 13770Lm 8100Lm LS6285PMU-2400 2250*62*85MM 108W 18360I m 108001 m

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线





CONTINUOUS 连接件

180° Extender 直连接件




L Shape Corner L字形连接件

X Shape Corner


十字形连接件



DETAIL 细节



Accessories 配件



T Shape Corner

T字形连接件












6 2 8 5 9

^{*}For retail or wholesale.you can buy accessories seprately.零售或批发,配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively proper accessories.工程项目, 请告知你的需求,我们会推荐合适配件。


DESIGN POSSIBILITIES

Free your creativity

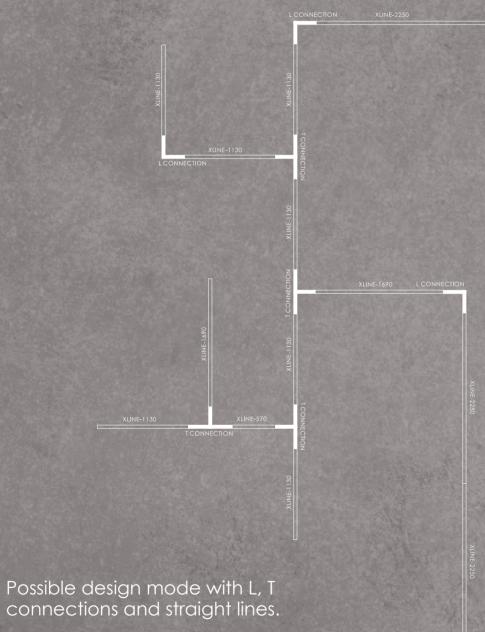





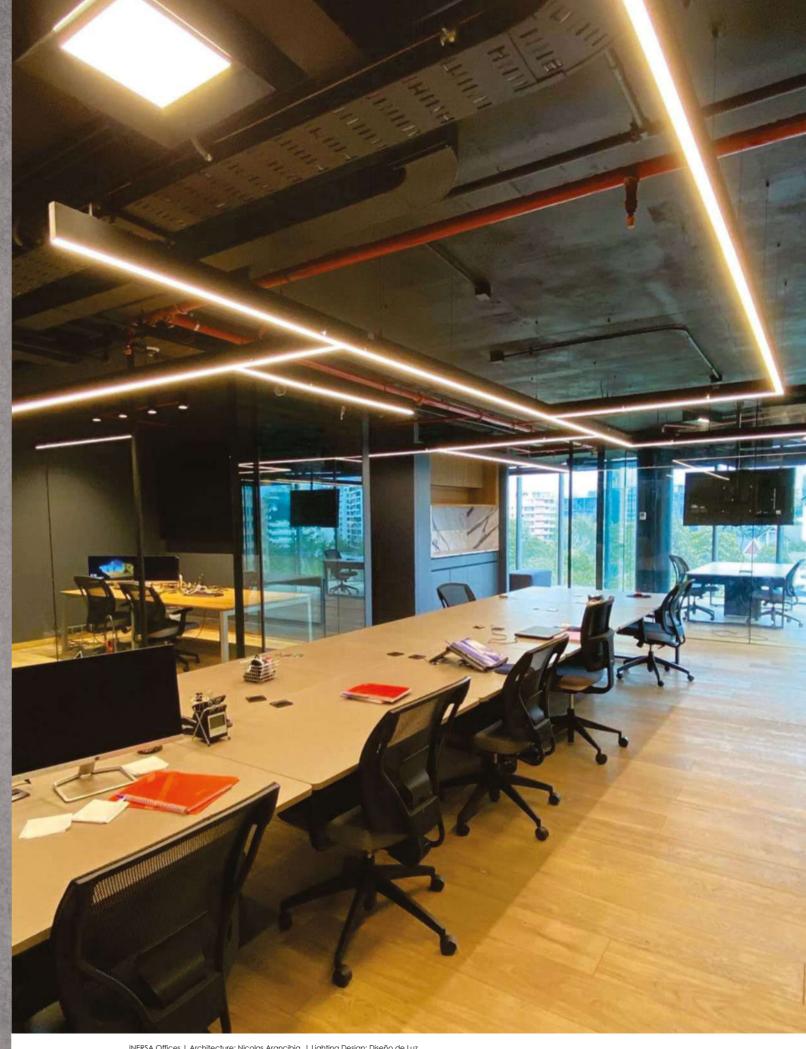






1. BCI Pagos Offices | Architecture and Lighting Design: Collective Architecture. | 2. BNP Paribas Cardif Offices | Architecture and Lighting Design: Grupo E.





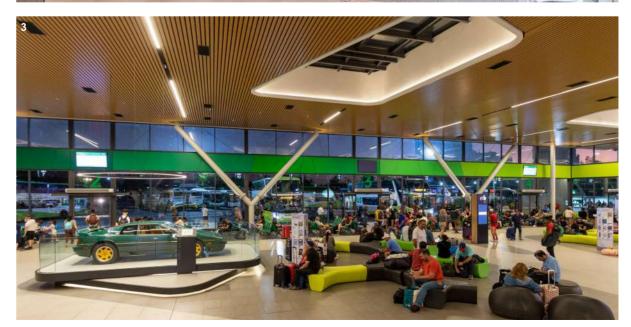

1. BNP Paribas Cardif Offices | Architecture and Lighting Design: Grupo E. | 2. IGS Group Offices | Architecture: Elton y Leniz Arquitectos. | Lighting Design: LEVO Studio. 3. Turbus Bus Station | Architecture: Estudio FES | Lighting Design: Diseño de Luz.



POWER SWITCHABLE

Traditionally, adjusting the power of a luminaire required the use of dimmable drivers and an external dimmer. With our new Power Switchable system, users can now switch power levels easily and cost-effectively, making lighting control more accessible and efficient.


CCT CHANGEABLE


The CCT Changeable feature allows users to modify the color temperature according to their needs, preferences, or the specific task at hand. With a simple DIP switch, it is possible to transition from a warm, cozy atmosphere to a bright, energizing environment, providing flexibility and comfort in any space.







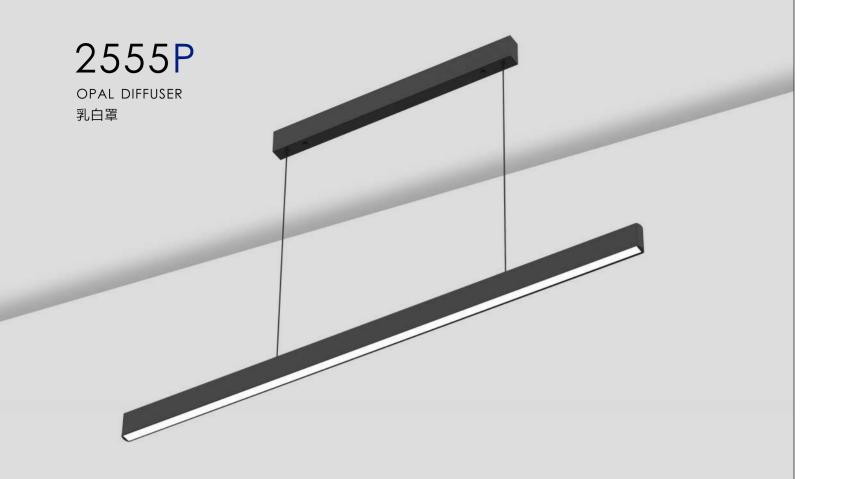

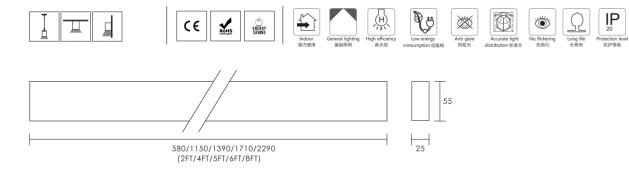

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.

 Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- Fast and easy connection with no shadow.
- \cdot High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- $\cdot \mbox{ Application:} Office, School, Hospital, Supermartket, Shopping Mall, Hotel, Public Area$
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DAL调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS2555P-600	570*25*55mm(2FT)	12W	2040Lm	960Lm
LS2555P-1200	1130*25*55mm(4FT)	24W	4080Lm	19200Lm
LS2555P-1500	1410*25*55mm(5FT)	30W	5100Lm	2400Lm
LS2555P-1800	1690*25*55mm(6FT)	36W	6120Lm	2880Lm
LS2555P-2400	2250*25*55mm(8FT)	48W	8160Lm	3840Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS2555P-600	570*25*55mm(2FT)	12W	2040Lm	960Lm
LS2555P-1200	1130*25*55mm(4FT)	24W	4080Lm	19200Lm
LS2555P-1500	1410*25*55mm(5FT)	30W	5100Lm	2400Lm
LS2555P-1800	1690*25*55mm(6FT)	36W	6120Lm	2880Lm
LS2555P-2400	2250*25*55mm(8FT)	48W	8160Lm	3840Lm

PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor


Accessories 配件





Canopy 吸顶盒

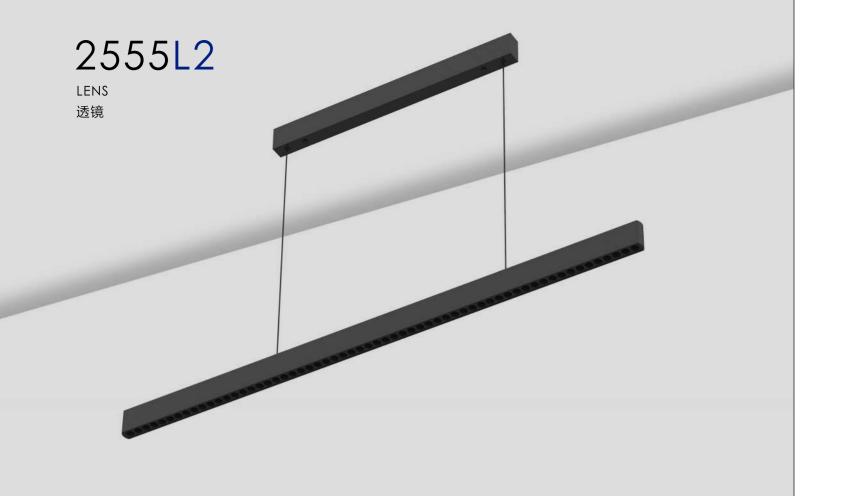

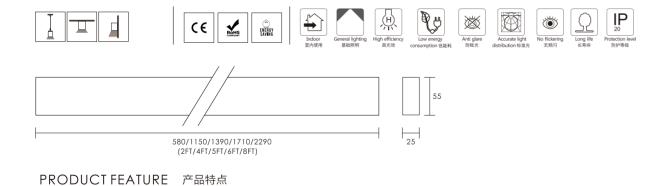

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- Long lifespan up to 50000hours, low decay and low maintanence cost.
 Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- \cdot High efficiency PC and even light distribution,no shawdon, anti-glare feature, easy installation to any shape.
- $\cdot \mbox{ Application:} Office, School, Hospital, Supermartket, Shopping Mall, Hotel, Public Area$
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DAL调光、调色温驱动电源。
- F-TUV调光、DALI调光、调色温驱动电源。 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS2555L2-600	580*25*55mm(2FT)	15W	2550Lm	1200Lm
LS2555L2-1200	1150*25*55mm(4FT)	30W	5100Lm	2400Lm
LS2555L2-1500	1390*25*55mm(5FT)	38W	6460Lm	3040Lm
LS2555L2-1800	1720*25*55mm(6FT)	45W	7650Lm	3600Lm
L\$2555L2-2400	2290*25*55mm(8FT)	60W	10200Lm	4800Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS2555L2-600	580*25*55mm(2FT)	15W	2550Lm	1200Lm
LS2555L2-1200	1150*25*55mm(4FT)	30W	5100Lm	2400Lm
LS2555L2-1500	1390*25*55mm(5FT)	38W	6460Lm	3040Lm
LS2555L2-1800	1720*25*55mm(6FT)	45W	7650Lm	3600Lm
LS2555L2-2400	2290*25*55mm(8FT)	60W	10200Lm	4800Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K	
CRI	□ 82+ □ 90+ □ 95+	
Finish	□ White ■ Black ■ Silver ■ Custom Color	
Dimming	□ On/off □ 1-10V □ DALI S Color Changing	g
Emergency	□ None □ 1.5 hours, half power	
Sensor	□ None □ Motion and daylight sensor	


DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线



Accessories 配件









2555

3535P

OPAL DIFFUSER

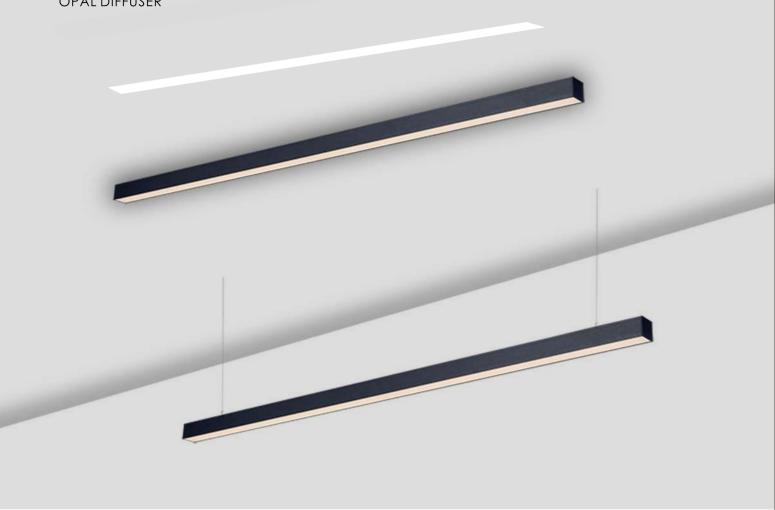



























PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3535P-600	570*35*35mm(2FT)	9W	1530Lm	900Lm
LS3535P-1200	1130*35*35mm(4FT)	18W	3060Lm	1800Lm
LS3535P-1500	1410*35*35mm(5FT)	22W	3740Lm	2200Lm
LS3535P-1800	1690*35*35mm(6FT)	27W	4590Lm	2700Lm
LS3535P-2400	2250*35*35mm(8FT)	36W	6120Lm	3600Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3535PU-600	570*35*35mm(2FT)	18W	3060Lm	1800Lm
LS3535PU-1200	1130*35*35mm(4FT)	36W	6120Lm	3600Lm
LS3535PU-1500	1410*35*35mm(5FT)	44W	7480Lm	4400Lm
LS3535PU-1800	1690*35*35mm(6FT)	54W	9180Lm	5400Lm
LS3535PU-2400	2250*35*35mm(8FT)	72W	12240Lm	7200Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线







CONTINUOUS 连接件



180° Extender 直连接件



L Shape Corner L字形连接件



T Shape Corner T字形连接件



X Shape Corner 十字形连接件













^{*}For retail or wholesale, you can buy accessories seprately,零售或批发,配件可单独购买。 *For project, you can tell us what exactly you want, we will recommend relatively prope ・・・ロスス。 vely proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。








- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.

570/1130/1410/1690/2250

(2FT/4FT/5FT/6FT/8FT)

- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- · High efficiency PC and even light distribution, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数







PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线







CONTINUOUS 连接件

180° Extender L Shape Corner 直连接件 L字形连接件 T Shape Corner X Shape Corner T字形连接件 十字形连接件

DETAIL 细节



Accessories 配件













155

^{*}For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively proper

vely proper accessories.工程项目, 请告知你的需求,我们会推荐合适配件。

3580PM PRISMATIC DIFFUSER UGR<19 棱晶防眩罩 眩光值<19



PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. \cdot Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数





Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3580PMU-600	570*35*80mm(2FT)	27W	4590Lm	2430Lm
LS3580PMU-1200	1130*35*80mm(4FT)	54W	9180Lm	4860Lm
LS3580PMU-1500	1410*35*80mm(5FT)	63W	10710Lm	5670Lm
LS3580PMU-1800	1690*35*80mm(6FT)	81W	13770Lm	7290Lm
LS3580PMU-2400	2250*35*80mm(8FT)	108W	18360Lm	9720Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI S Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线







CONTINUOUS 连接件

180° Extender L Shape Corner 直连接件 L字形连接件 T Shape Corner X Shape Corner T字形连接件 十字形连接件

DETAIL 细节






^{*}For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively proper

vely proper accessories.工程项目, 请告知你的需求,我们会推荐合适配件。



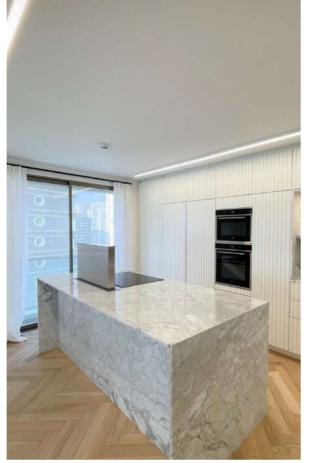













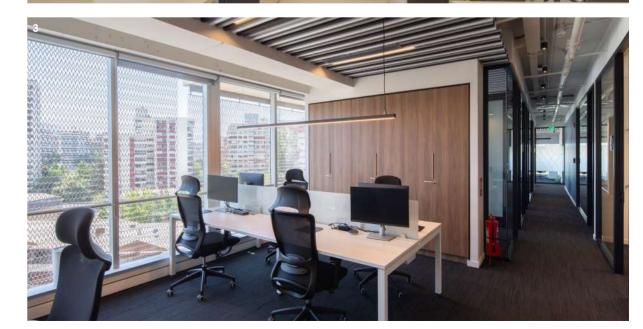

 $1.\,Show room\,BASH\,\,Vespucio\,\,|\,\,Architecture;\,WORKPLACES.\,\,|\,\,2.\,Transtel\,\,Offices\,\,|\,\,Architecture;\,Espiral\,\,Architecture.$

3. Novo Nordisk Offices | Architecture: FMZ Arquitectura | Lighting Design: Docevolts-Francisca Nicoletti.

3580L1 **OPTIC LENS**

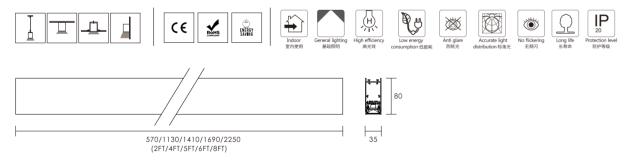


PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency optic lens ,} \\ \text{anti-glare feature, easy installation to any}$ shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,高透光扩散型控光罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3580L1-600	570*35*80mm(2FT)	2*5W	1400Lm	900Lm
L\$3580L1-1200	1130*35*80mm(4FT)	4*5W	2800Lm	1800Lm
L\$3580L1-1500	1410*35*80mm(5FT)	6*5W	4200Lm	2700Lm
LS3580L1-1800	1690*35*80mm(6FT)	6*5W	4200Lm	2700Lm
L\$3580L1-2400	2250*35*80mm(8FT)	8*5W	56001 m	36001 m

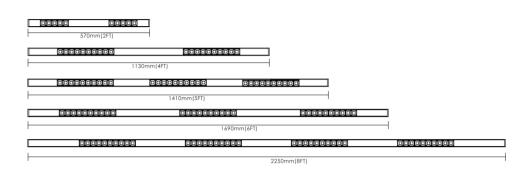


PRODUCT OPTION 可选产品配置


	CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
	CRI	□ 82+ □ 90+ □ 95+
	Finish	□ White ■ Black ■ Silver ■ Custom Color
Ī	Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
	Emergency	□ None □ 1.5 hours, half power
	Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

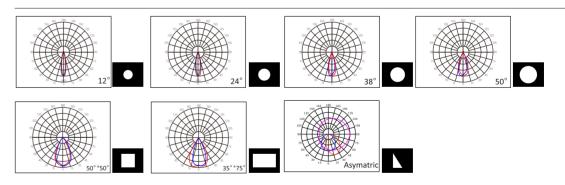




^{*}For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。 *For project, you can tell us what exactly you want, we will recommend relatively proper

vely proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。



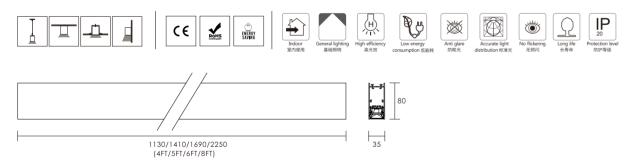

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost. · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- · High efficiency PC and optic lens, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩与光学透镜组合,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS3580C-1200	1130*35*80mm(4FT)	2*5W+18W	3300Lm	1980Lm
L\$3580C-1500	1410*35*80mm(6FT)	4*5W+18W	4800Lm	2880Lm
LS3580C-1800	1690*35*80mm(8FT)	4*5W+27W	5250Lm	3150Lm
L\$3580C-2400	2250*35*80mm(8FT)	4*5W+36W	6600Lm	3960Lm

	570mm(2FT)	
	1130mm(4FT) 570mm(2FT)	
	1410mm(5FT)	
	840mm(3FT) 1690mm(6FT)	
		1130mm(4FT)
1	2250mm	(8FT)


PRODUCT OPTION 可选产品配置

	CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
Ī	CRI	□ 82+ □ 90+ □ 95+
	Finish	□ White ■ Black ■ Silver ■ Custom Color
	Dimming	□ On/off □ 1-10V □ DALI 🚪 Color Changing
	Emergency	□ None □ 1.5 hours, half power
	Sensor	□ None □ Motion and daylight sensor


DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

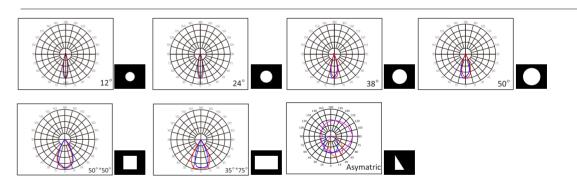


Accessories 配件



*For retail or wholesale, you can buy accessories seprately. 零售或批发,配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目, 请告知你的需求,我们会推荐合适配件。



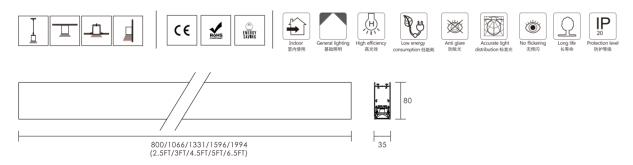


- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost.
- Distinguished end-caps, No screw to be appeared, No light leak. High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- High efficiency optic lens, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
L\$3580L2-800	800*35*80mm(2.5FT)	6*5W	4200Lm	2700Lm
L\$3580L2-1000	1066*35*80mm(3.5FT)	8*5W	5600Lm	3600Lm
L\$3580L2-1400	1331*35*80mm(4.5FT)	10*5W	7000Lm	4500Lm
LS3580L2-1600	1596*35*80mm(5FT)	12*5W	8400Lm	5400Lm
L\$3580L2-2000	1994*35*80mm(6.5FT)	15*5W	10500l m	67501 m

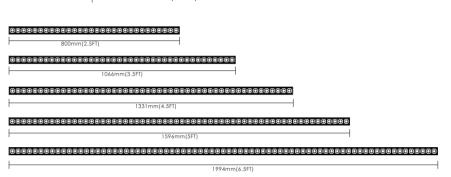


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor


DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

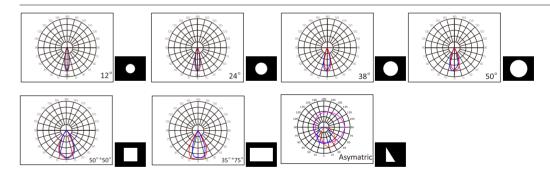


Accessories 配件




^{*}For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

3580165

164

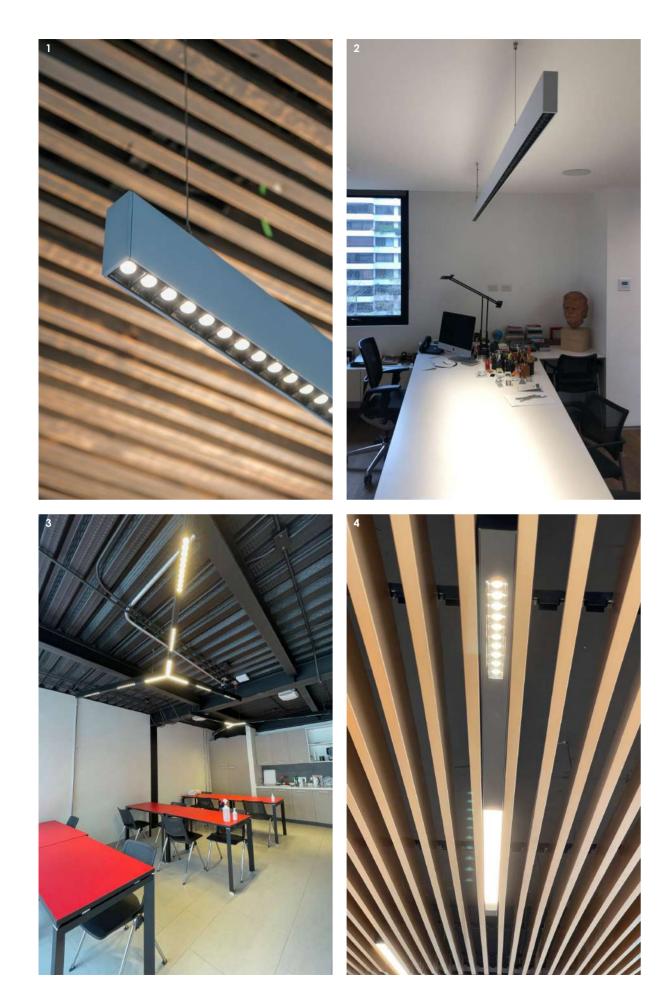



1,4: Scanavini Showroom | Architecture: AJS Arquitectos | Lighting Design: Campino Iluminación - Victoria Campino.
2. Gonzalo Mardones Offices | Lighting Design: Diseño de Luz. | 3. Research Center JRI | Architecture: De Toro & Sitja.

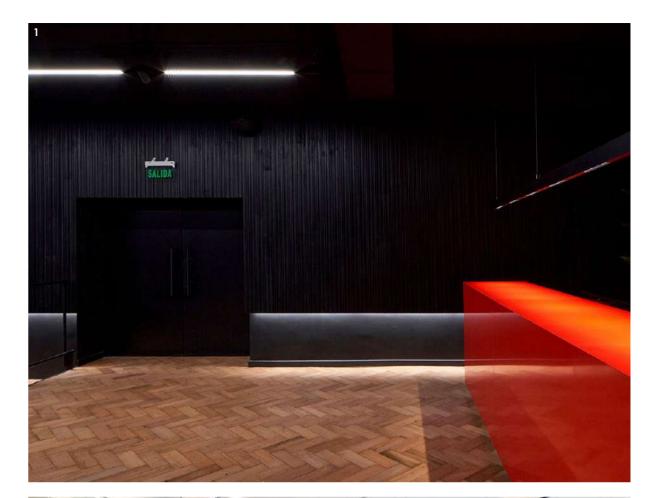



Teatro del Ángel | Architecture: Alberto Moletto | Lighting Design: Antonia Peón Vega / Matias López
 DITEC - Jaguar y Land Rover Showroom. | Architecture: Rodrigo Errázuriz. | Lighting Design: LEVO Studio.

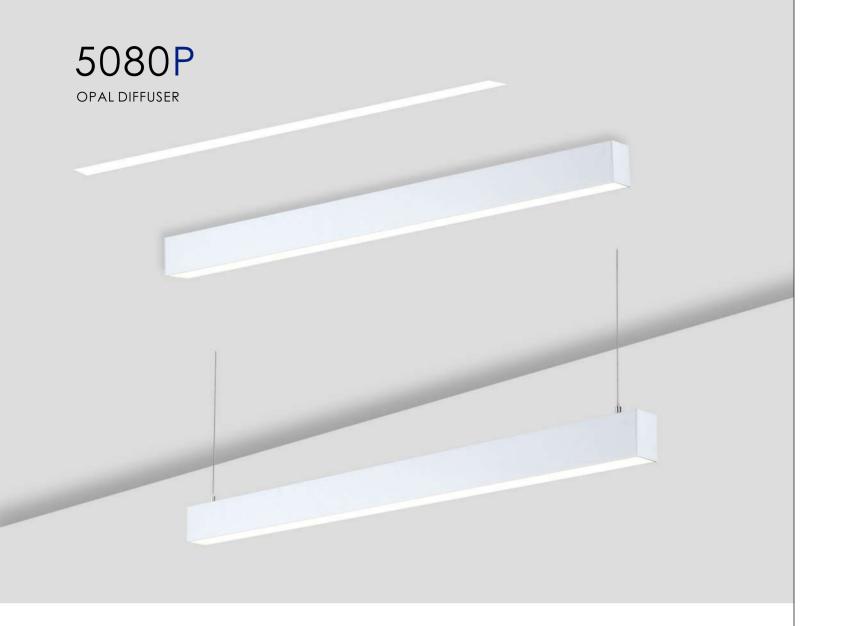

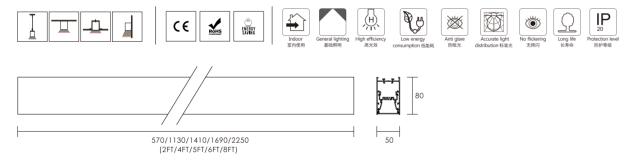

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080P-600	570*50*80mm(2FT)	18W	3060Lm	1800Lm
LS5080P-1200	1130*50*80mm(4FT)	36W	6120Lm	3600Lm
LS5080P-1500	1410*50*80mm(5FT)	45W	7650Lm	4500Lm
LS5080P-1800	1690*50*80mm(6FT)	54W	9180Lm	5400Lm
LS5080P-2400	2250*50*80mm(8FT)	72W	12240Lm	7200Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080PU-600	570*50*80mm(2FT)	27W	4590Lm	2700Lm
LS5080PU-1200	1130*50*80mm(4FT)	54W	9180Lm	5400Lm
LS5080PU-1500	1410*50*80mm(5FT)	63W	10710Lm	6300Lm
LS5080PU-1800	1690*50*80mm(6FT)	81W	13770Lm	8100Lm
LS5080PU-2400	2250*50*80mm(8FT)	108W	18360Lm	10800Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线







CONTINUOUS 连接件

180° Extender 直连接件

T Shape Corner

T字形连接件



L Shape Corner L字形连接件



X Shape Corner 十字形连接件

DETAIL 细节





















^{*}For retail or wholesale.you can buy accessories seprately.零售或批发,配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively prope

カラス。 proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。




UGR<19 眩光值小于19

5080PM

PRISMATIC DIFFUSER UGR<19

棱晶防眩罩



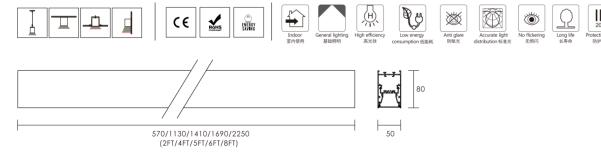

PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. \cdot Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080PM-600	570*50*80mm(2FT)	18W	3060Lm	1800Lm
LS5080PM-1200	1130*50*80mm(4FT)	36W	6120Lm	3600Lm
LS5080PM-1500	1410*50*80mm(5FT)	45W	7650Lm	4500Lm
LS5080PM-1800	1690*50*80mm(6FT)	54W	9180Lm	5400Lm
LS5080PM-2400	2250*50*80mm(8FT)	72W	12240Lm	7200Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080PMU-600	570*50*80mm(2FT)	27W	4590Lm	2700Lm
LS5080PMU-1200	1130*50*80mm(4FT)	54W	9180Lm	5400Lm
LS5080PMU-1500	1410*50*80mm(5FT)	63W	10710Lm	6300Lm
LS5080PMU-1800	1690*50*80mm(6FT)	81W	13770Lm	8100Lm
L\$5080PMU-2400	2250*50*80mm(8FT)	108W	18360Lm	10800Lm


PRODUCT OPTION 可选产品配置

	CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
	CRI	□ 82+ □ 90+ □ 95+
	Finish	□ White ■ Black ■ Silver ■ Custom Color
Ī	Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
	Emergency	□ None □ 1.5 hours, half power
	Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线







CONTINUOUS 连接件



180° Extender 直连接件

T Shape Corner T字形连接件



L Shape Corner L字形连接件



X Shape Corner 十字形连接件



DETAIL 细节






















^{*}For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

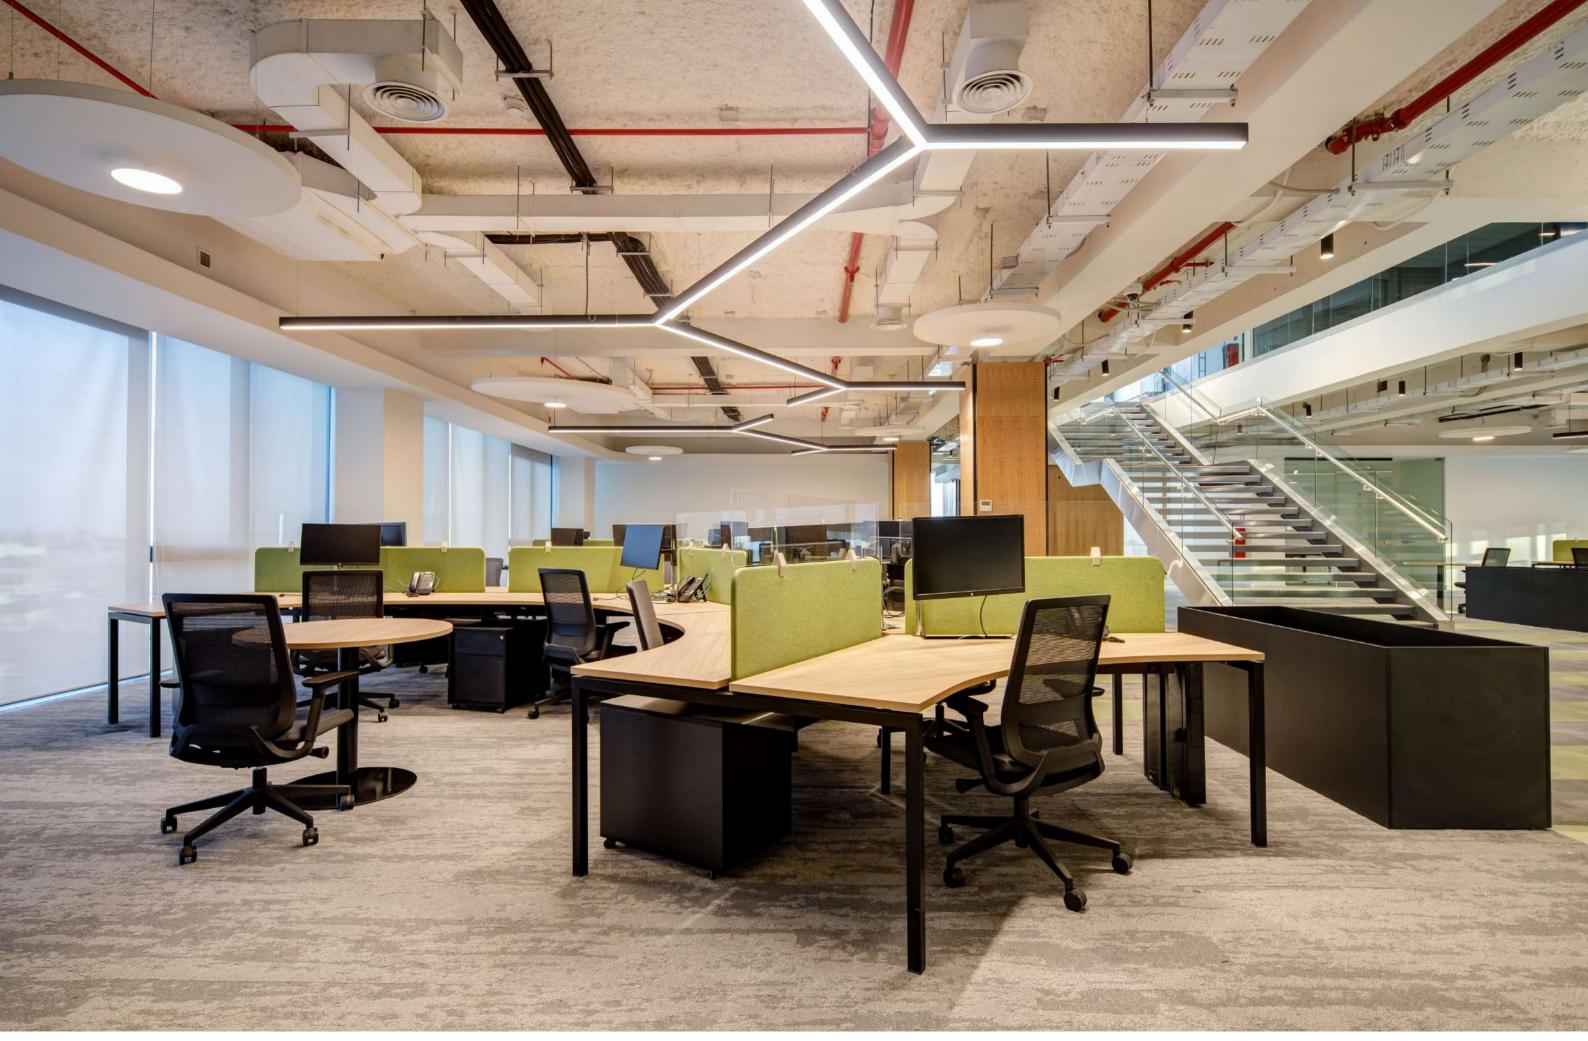



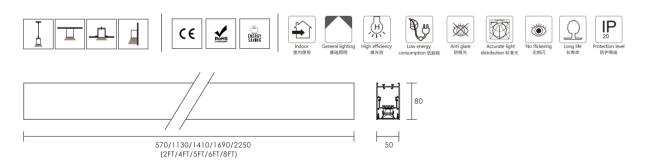

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬崩美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
L\$5080L1-600	570*50*80mm(2FT)	2*5W	1400Lm	900Lm
L\$5080L1-1200	1130*50*80mm(4FT)	4*5W	2800Lm	1800Lm
LS5080L1-1500	1410*50*80mm(5FT)	6*5W	4200Lm	2700Lm
LS5080L1-1800	1690*50*80mm(6FT)	6*5W	4200Lm	2700Lm
LS5080L1-2400	2250*50*80mm(8FT)	8*5W	5600Lm	3600Lm

570mm(2FT)			
1130mr	m(4FT)	□ ⊣	
88888		00000	
00000 00000 00000	1410mm(5FT)		
	1690mm(6FT)		 i
1	225	0mm(8FT)	


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI S Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节





LIGHT DISTRIBUTION CURVE 光强分布曲线

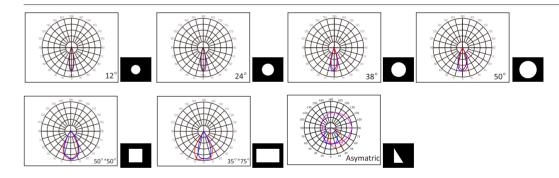



^{*}For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

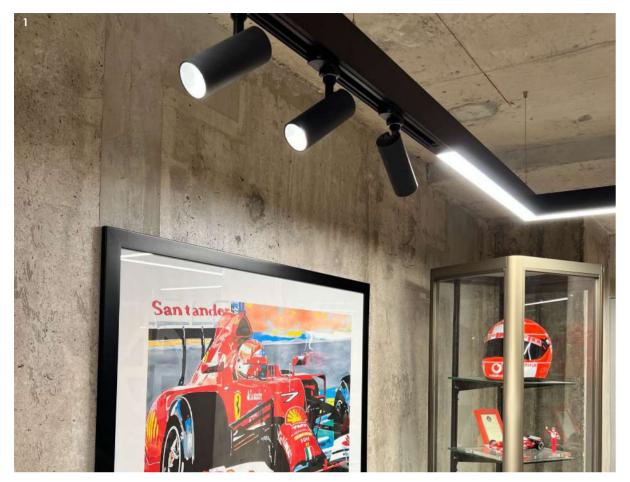

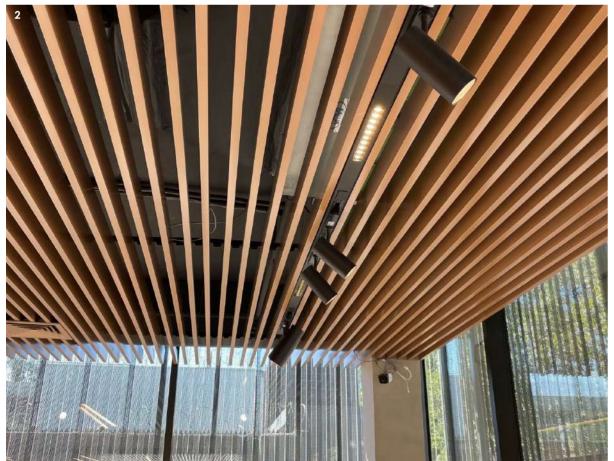











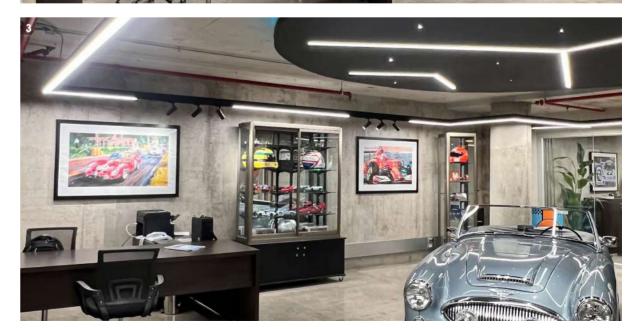

Scanavini Showroom | Architecture: AJS Arquitectos | Lighting Design: Campino lluminación - Victoria Campino
 Car Storage | Architecture and Lighting Design: Urban Chic-Marcelo Varetto



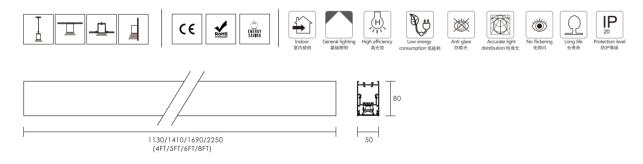

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩与光学透镜组合,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS5080C-1200	1130*50*80mm(4FT)	2*5W+12W	3300Lm	1980Lm
LS5080C-1500	1410*50*80mm(5FT)	4*5W+12W	4800Lm	2880Lm
LS5080C-1800	1690*50*80mm(6FT)	4*5W+15W	5250Lm	3150Lm
LS5080C-2400	2250*50*80mm(8FT)	4*5W+24W	6600Lm	3960Lm

	Y//://///:////////////////////////////	
	<u> </u>	
1	570mm(2FT)	
	1130mm(4FT)	
	1410mm(5FT)	
ı	840mm(3FT)	
	1690mm(6FT)	
I		1130mm(4FT)
	22	50mm(8FT)


PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

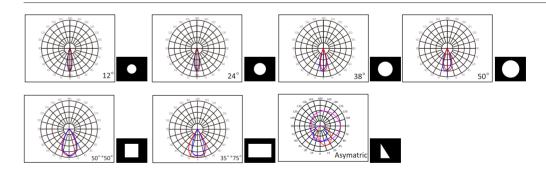
















^{*}For retail or wholesale.you can buy accessories seprately.零售或批发,配件可单独购买。
*For project,you can tell us what exactly you want,we will recommend relatively prope proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。




5080T OPAL DIFFUSER+OPTIC LENS+Track

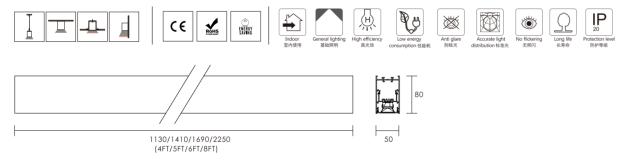

PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. \cdot Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩与光学透镜组合,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

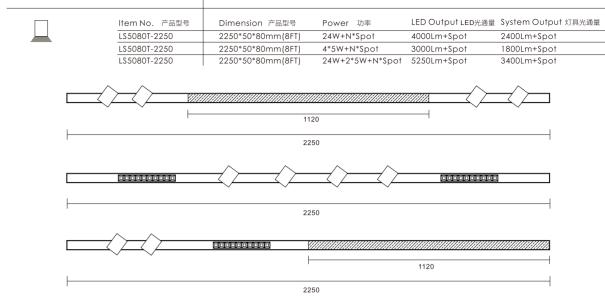


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor


DETAIL 细节




LIGHT DISTRIBUTION CURVE 光强分布曲线

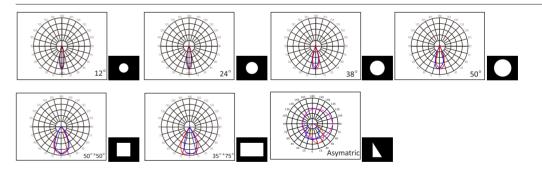


Accessories 配件



*For retail or wholesale.you can buy accessories seprately.零售或批发,配件可单独购买。 *For project,you can tell us what exactly you want,we will recommend relatively prope =独网头。 :ly proper accessories.工程项目, 请告知你的需求,我们会推荐合适配件。

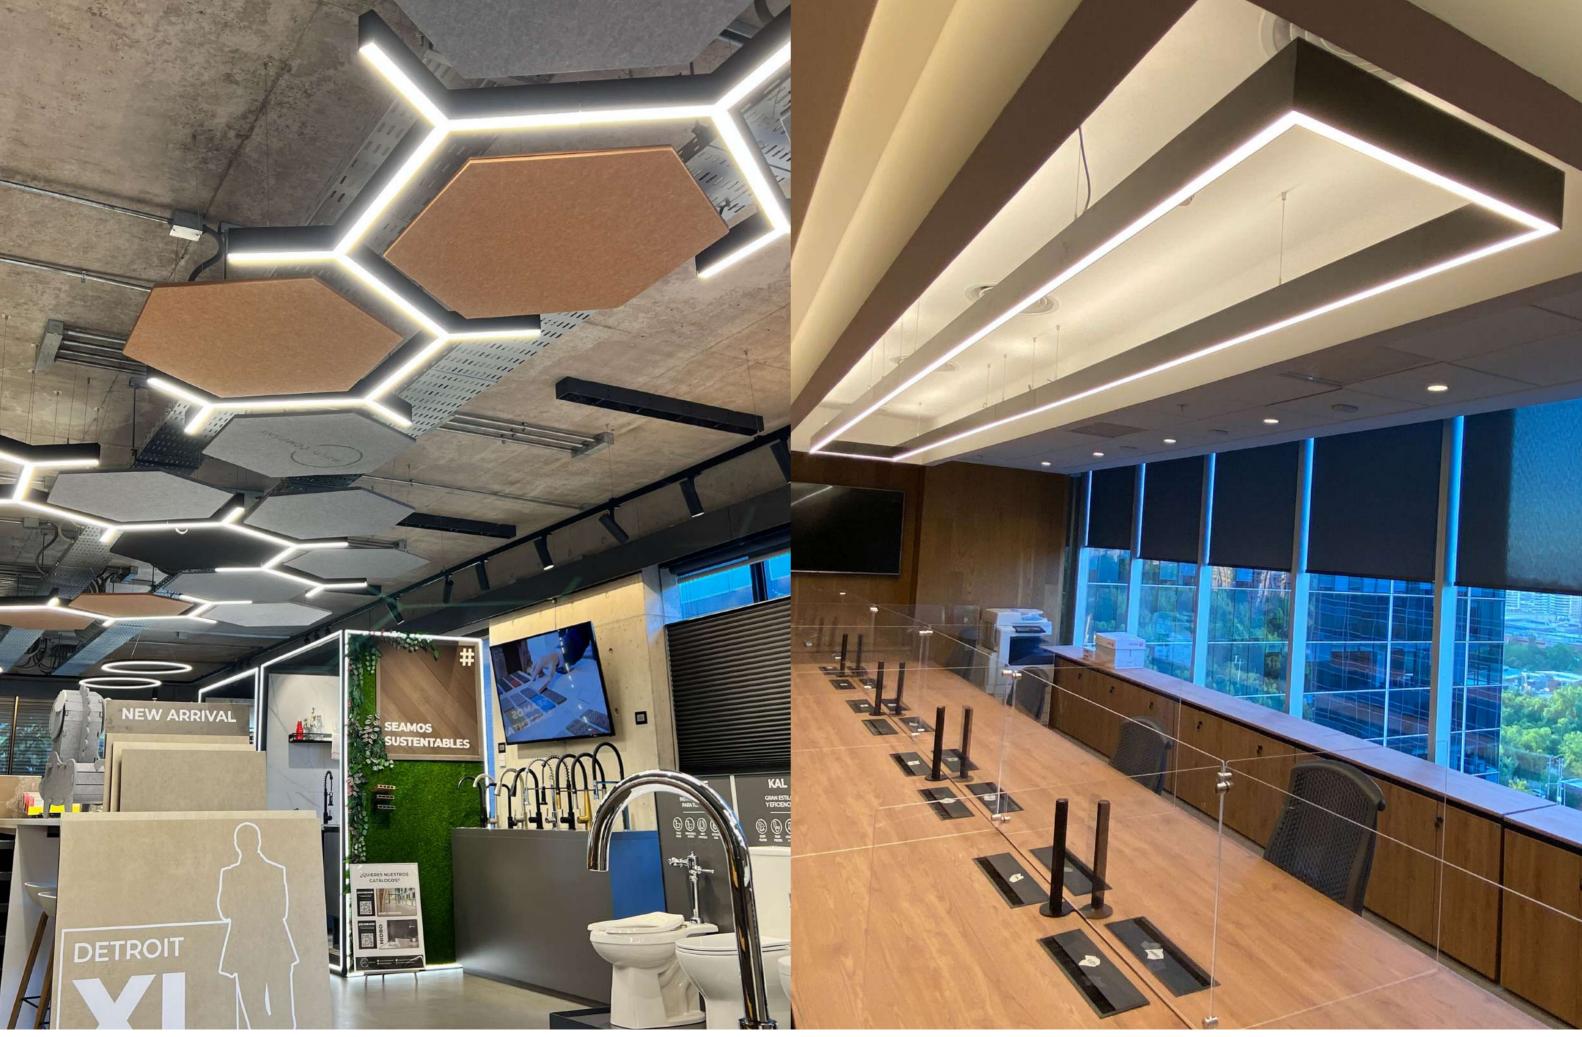



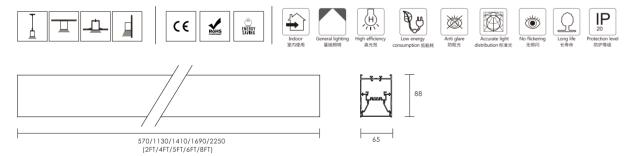

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- · High efficiency PC and even light distribution, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝压铸铝端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6588P-600	570*65*88mm(2FT)	18W	3060Lm	1800Lm
LS6588P-1200	1130*65*88mm(4FT)	36W	6120Lm	3600Lm
LS6588P-1500	1410*65*88mm(5FT)	45W	7650Lm	4500Lm
LS6588P-1800	1690*65*88mm(6FT)	54W	9180Lm	5400Lm
LS6588P-2400	2250*65*88mm(8FT)	72W	12240Lm	7200Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS6588PU-600	570*65*88mm(2FT)	27W	4590Lm	2700Lm
LS6588PU-1200	1130*65*88mm(4FT)	45W	7650Lm	4500Lm
LS6588PU-1500	1410*65*88mm(5FT)	67W	11390Lm	6700Lm
LS6588PU-1800	1690*65*88mm(6FT)	81W	13770Lm	8100Lm
LS6588PU-2400	2250*65*88mm(8FT)	108W	18360Lm	10800Lm

PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI SColor Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线









CONTINUOUS 连接件



180° Extender 直连接件

T Shape Corner

T字形连接件




L Shape Corner L字形连接件



X Shape Corner 十字形连接件

DETAIL 细节





















^{*}For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively prope

oper accessories.工程项目,请告知你的需求,我们会推荐合适配件。


6588PM PRISMATIC DIFFUSER UGR<19 棱晶防眩罩 眩光值<19

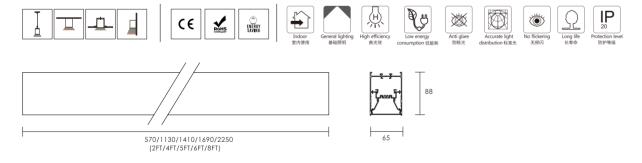

PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- · High efficiency PC and even light distribution, no shawdon, anti-glare feature, easy installation to any shape.
- $\cdot \\ Application: Office, School, Hospital, Supermartket, Shopping$ Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝压铸铝端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

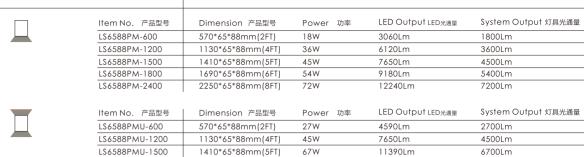

81W

108W

13770Lm

18360I m

8100Lm


10800Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI SColor Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LS6588PMU-1800


LIGHT DISTRIBUTION CURVE 光强分布曲线





1690*65*88mm(6FT)

LS6588PMU-2400 2250*65*88mm(8FT)



CONTINUOUS 连接件

[] 180° Extender 直连接件

T Shape Corner T字形连接件





L Shape Corner L字形连接件



X Shape Corner 十字形连接件

DETAIL 细节

















^{*}Forretail or wholesale, you can buy accessories seprately, 零售或批发,配件可单独购买。 *For project, you can tell us what exactly you want, we will recommend relatively prope

vely proper accessories.工程项目. 请告知你的需求,我们会推荐合适配件。

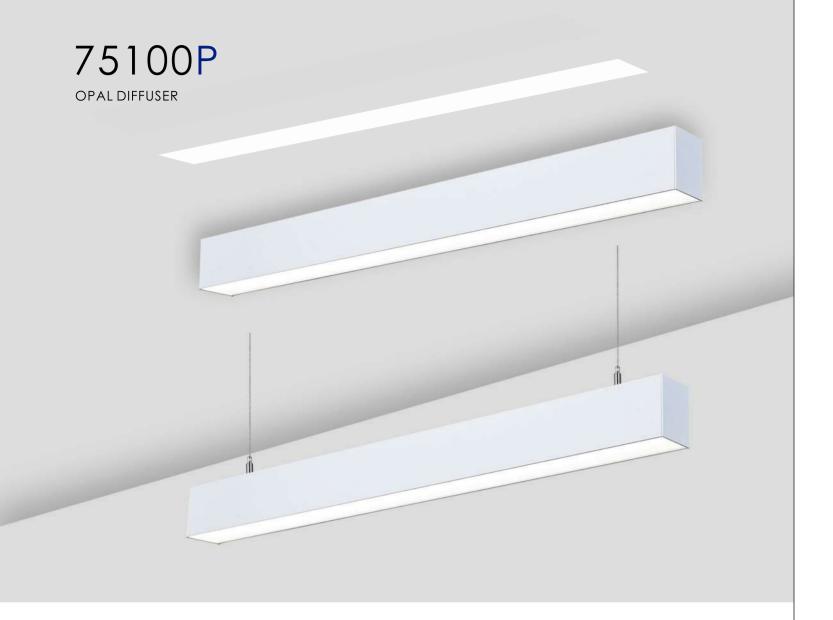

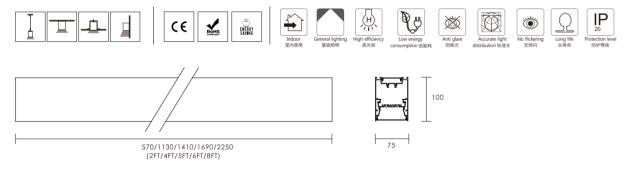

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝压铸铝端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS75100P-600	570*75*100mm(2FT)	18W	3060Lm	1800Lm
LS75100P-1200	1130*75*100mm(4FT)	36W	6120Lm	3600Lm
LS75100P-1500	1410*75*100mm(5FT)	45W	7650Lm	4500Lm
LS75100P-1800	1690*75*100mm(6FT)	54W	9180Lm	5400Lm
LS75100P-2400	2250*75*100mm(8FT)	72W	12240Lm	7200Lm




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LS75100PU-600	570*75*100mm(2FT)	27W	4590Lm	2700Lm
LS75100PU-1200	1130*75*100mm(4FT)	45W	7650Lm	4500Lm
LS75100PU-1500	1410*75*100mm(5FT)	67W	11390Lm	6700Lm
LS75100PU-1800	1690*75*100mm(6FT)	81W	13770Lm	8100Lm
LS75100PU-2400	2250*75*100mm(8FT)	108W	18360Lm	10800Lm

PRODUCT OPTION 可选产品配置


CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线









CONTINUOUS 连接件

直连接件

180° Extender

T Shape Corner

T字形连接件



L Shape Corner



X Shape Corner 十字形连接件

DETAIL 细节




















^{*}For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目, 请告知你的需求,我们会推荐合适配件。



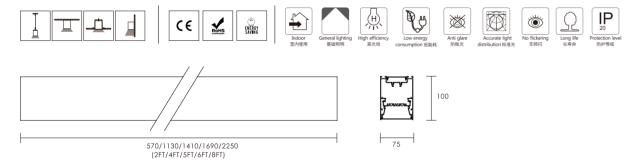

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- · High efficiency PC and even light distribution, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝压铸铝端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数






PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI SColor Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor


LIGHT DISTRIBUTION CURVE 光强分布曲线



T Shape Corner

T字形连接件





CONTINUOUS 连接件


180° Extender L Shape Corner 直连接件



DETAIL 细节




Accessories 配件



十字形连接件

^{*}For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。 *For project, you can tell us what exactly you want, we will recommend relatively prope 可单独购头。 ively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。




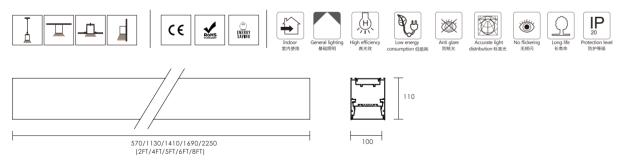

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. · Long lifespan up to 50000hours, low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- · High efficiency PC and even light distribution, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数







PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线







CONTINUOUS 连接件



T Shape Corner

T字形连接件





L Shape Corner L字形连接件



X Shape Corner 十字形连接件

DETAIL 细节















^{*}For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。










1. IGS Group Offices | Architecture: Elton y Leniz Arquitectos | Lighting Design: LEVO Studio | 2. Enlasa Offices | Architecture: Nicolas Arancibia | Lighting Design: CONTRALUZ 3. Decathlon | Architecture: Tiso Arquitectos. | 4. MK Offices | Architecture and Lighting Design: OArquitectos.





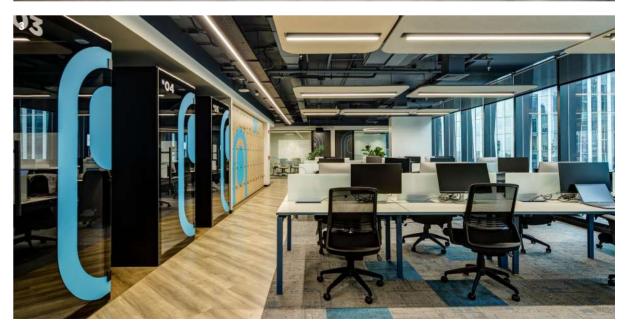

I. Indura Offices | Architecture: AJS Arquitectos | Lighting Design: Diseño de Luz.
 Studio PAS Academy | Architecture and Design: Sientecinco. | 3. Onnet Fibra | Architecture and Construction: CASBRO.

XLINE SERIES

RECESSED

Designed for seamless integration into architecture, XLINE Recessed brings maximum versatility to linear lighting. Available with an opal diffuser, optical modules, or a combination of both, it adapts to the needs of residential, commercial, and educational spaces, providing lighting that is both functional and visually refined.

Its flexibility allows the use of multiple connectors to create continuous recessed compositions, opening new possibilities for creative design within ceilings and walls. To meet the demands of different projects, XLINE Recessed is available in various profiles — from slim formats to more robust sections — ensuring the perfect balance between discretion and performance.

More than lighting, XLINE Recessed is a tool to enhance architecture with precision, elegance, and creative freedom.






1.BNP Paribas Cardif Offices | Architecture and Lighting Design: Grupo E.

4737P



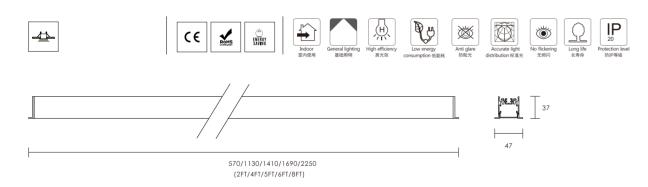

PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. \cdot Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737P-600	570*47*37mm(2FT)	18W	2040Lm	1620Lm
LR4737P-1200	1130*47*37mm(4FT)	36W	4080Lm	3240Lm
LR4737P-1500	1410*47*37mm(5FT)	45W	6120Lm	3600Lm
LR4737P-1800	1690*47*37mm(6FT)	54W	7140Lm	4320Lm
LR4737P-2400	2250*47*37mm(8FT)	72W	8080Lm	6480Lm


PRODUCT OPTION 可选产品配置

CCI	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	☐ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI S Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线







CONTINUOUS 连接件



180° Extender 直连接件



L Shape Corner L字形连接件




T Shape Corner T字形连接件



X Shape Corner 十字形连接件

DETAIL 细节





Accessories 配件







^{*}For retail or wholesale, you can buy accessories seprately。零售或批发,配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively proper accessories. 工程项目,请告知你的需求,我们会推荐合适配件。


201



4737PM

PRISMATIC DIFFUSER UGR<19

棱晶防眩罩 眩光值<19

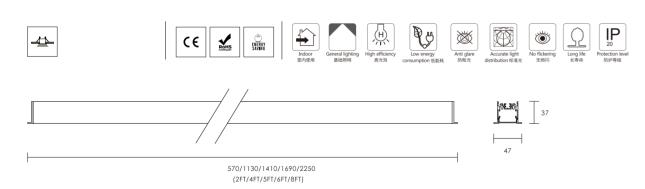

PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. \cdot Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737PM-600	570*47*37mm(2FT)	18W	2040Lm	1260Lm
LR4737PM-1200	1130*47*37mm(4FT)	36W	4080Lm	2520Lm
LR4737PM-1500	1410*47*37mm(5FT)	45W	6120Lm	3150Lm
LR4737PM-1800	1690*47*37mm(6FT)	54W	7140Lm	3780Lm
LR4737PM-2400	2250*47*37mm(8FT)	72W	8080Lm	5040Lm


PRODUCT OPTION 可选产品配置

CCI	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线







CONTINUOUS 连接件



180° Extender 直连接件



L Shape Corner L字形连接件




T Shape Corner T字形连接件



X Shape Corner 十字形连接件

DETAIL 细节












^{*}For retail or wholesale, you can buy accessories seprately,零售或批发,配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。



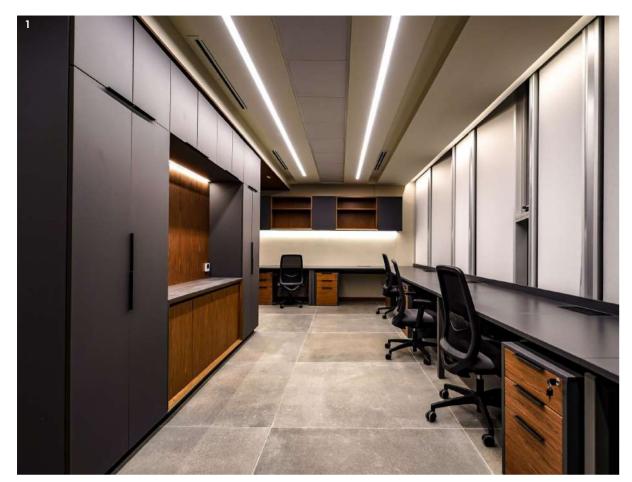



1. Magasich Office | Architecture: Francisco Vivanco | Lighting Design: Diseño de Luz | 2. BCI Pagos Offices | Architecture and Lighting Design: Collective Architecture.









1. Saint George School's Classroom | Architecture: Elton Deves Arquitectos | Lighting Design: Docevolts.

^{2.} BNP Paribas Cardif Offices | Architecture and Lighting Design: Grupo E | 3. Car Storage | Architecture and Lighting Design: Urban Chic-Marcelo Varetto.

4737L1

OPTIC LENS

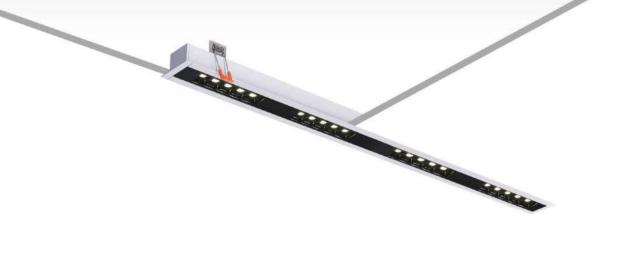

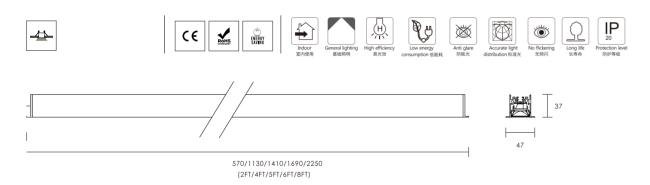


PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- \cdot Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- $\cdot \ High\ efficiency\ optic\ lens, no\ shawdon, anti-glare\ feature, easy\ installation$ to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737L1-600	570*47*37mm(2FT)	2*5W	1400Lm	900Lm
LR4737L1-1200	1130*47*37mm(4FT)	4*5W	2800Lm	1800Lm
LR4737L1-1500	1410*47*37mm(5FT)	6*5W	4200Lm	2700Lm
LR4737L1-1800	1690*47*37mm(6FT)	6*5W	4200Lm	2700Lm
LR4737L1-2400	2250*47*37mm(8FT)	8*5W	5600Lm	3600Lm

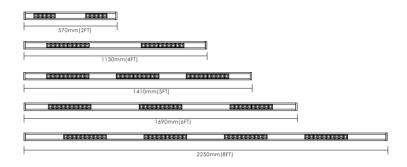


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI 5 Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

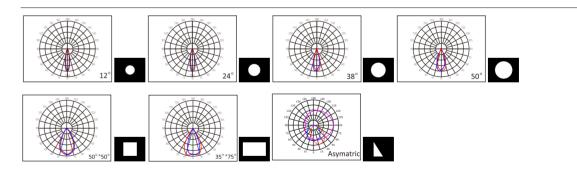







^{*}For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

4737L2

OPTIC LENS SEAMLESS






PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- Long lifespan up to 50000hours, low decay and low maintanence cost.
 Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- $\cdot \mbox{ High efficiency optic lens,} \mbox{no shawdon,} \mbox{anti-glare} \quad \mbox{feature,easy installation to any shape.}$
- $\cdot \mbox{ Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area} \\$
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 光学透镜,出光均匀,防炫效果好
- 应用场所: 写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737L2-800	813*47*37mm(2.5FT)	6*5W	4200Lm	2700Lm
LR4737L2-1000	1078*47*37mm(3.5FT)	8*5W	5600Lm	3600Lm
LR4737L2-1400	1343*47*37mm(4.5FT)	10*5W	6000Lm	4500Lm
LR4737L2-2000	2005*47*37mm(6.5FT)	15*5W	10500Lm	6750Lm

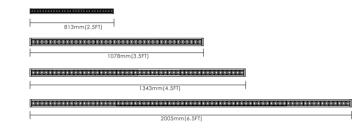


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

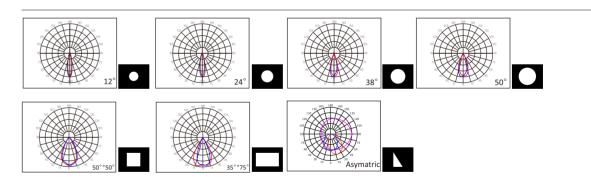

Accessories 配件








^{*}For retail or wholesale, you can buy accessories seprately.零售或批发,配件可单独购买。

209

^{*}For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

4737C

OPTIC LENS+OPAL DIFFUSER

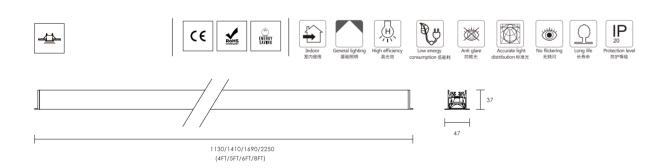


PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
- · Long lifespan up to 50000hours, low decay and low maintanence cost. · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- · High efficiency PC and optic lens, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。
- 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩与光学透镜组合,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR4737C-1200	1130*47*37mm(4FT)	2*5W+12W	3080Lm	1980Lm
LR4737C-1500	1410*47*37mm(5FT)	4*5W+12W	4480Lm	2880Lm
LR4737C-1800	1690*47*37mm(6FT)	4*5W+15W	4900Lm	3150Lm
LR4737C-2400	2250*47*37mm(8FT)	4*5W+24W	6160Lm	3960Lm

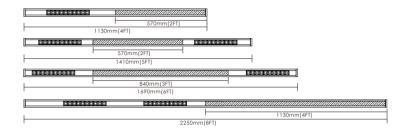


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI S Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

DETAIL 细节



LIGHT DISTRIBUTION CURVE 光强分布曲线

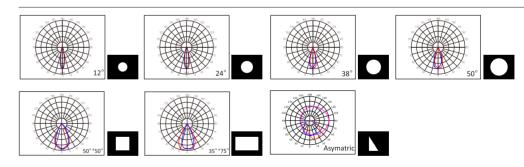

Accessories 配件








*for retail or wholesale, you can buy accessories seprately,零售或批发,配件可单独购买。
*for project, you can tell us what exactly you want, we will recommend relatively proper accessories 工程项目,请告知你的需求,我们会推荐合适配件。

6537P OPAL DIFFUSER

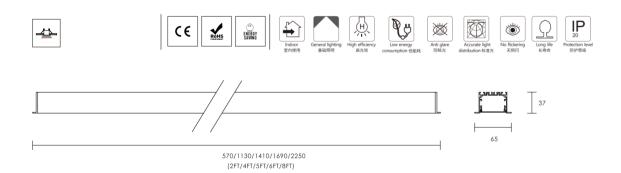

PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. \cdot Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR6537P-600	570*65*37mm(2FT)	18W	2040Lm	1620Lm
LR6537P-1200	1130*65*37mm(4FT)	36W	4080Lm	3240Lm
LR6537P-1500	1410*65*37mm(5FT)	45W	6120Lm	4050Lm
LR6537P-1800	1690*65*37mm(6FT)	54W	7140Lm	4860Lm
LR6537P-2400	2250*65*37mm(8FT)	72W	8160Lm	6480Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI S Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线







CONTINUOUS 连接件


180° Extender 直连接件

L Shape Corner L字形连接件



X Shape Corner 十字形连接件

DETAIL 细节







Accessories 配件






213

^{*}For retail or wholesale, you can buy accessories seprately,零售或批发,配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively prope vely proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

6537PM

PRISMATIC DIFFUSER UGR<19

棱晶防眩罩 眩光值<19

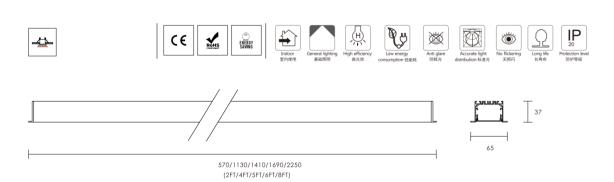

PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. \cdot Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR6537PM-600	570*65*37mm(2FT)	18W	2040Lm	1260Lm
LR6537PM-1200	1130*65*37mm(4FT)	36W	4080Lm	2520Lm
LR6537PM-1500	1410*65*37mm(5FT)	45W	6120Lm	3150Lm
LR6537PM-1800	1690*65*37mm(6FT)	54W	7140Lm	3780Lm
LR6537PM-2400	2250*65*37mm(8FT)	72W	8160Lm	5040Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线







CONTINUOUS 连接件


180° Extender 直连接件

L Shape Corner L字形连接件



X Shape Corner 十字形连接件

DETAIL 细节










^{*}For retail or wholesale, you can buy accessories seprately,零售或批发,配件可单独购买。
*For project, you can tell us what exactly you want, we will recommend relatively prope

ely proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

9037P

OPAL DIFFUSER

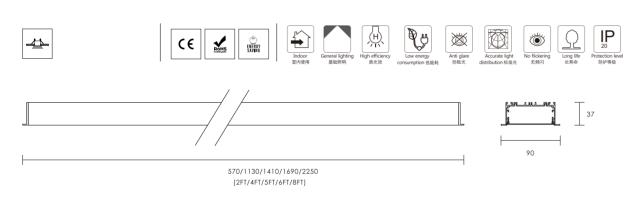

PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver. \cdot Long lifespan up to 50000hours,low decay and low maintanence cost.
- · Distinguished end-caps, No screw to be appeared, No light leak.
- · High grade aluminum, high quality surface painting.
- \cdot Fast and easy connection with no shadow.
- $\cdot \ \text{High efficiency PC and even light distribution, no shawdon, anti-glare}$ feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配 1-10V调光、DALI调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR9037P-600	570*90*37mm(2FT)	18W	3060Lm	1800Lm
LR9037P-1200	1130*90*37mm(4FT)	36W	6120Lm	3600Lm
LR9037P-1500	1410*90*37mm(5FT)	45W	7650Lm	4500Lm
LR9037P-1800	1690*90*37mm(6FT)	54W	9180Lm	5400Lm
LR9037P-2400	2250*90*37mm(8FT)	72W	12240Lm	7200Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线







CONTINUOUS 连接件



180° Extender 直连接件



L Shape Corner L字形连接件





T字形连接件



X Shape Corner 十字形连接件

DETAIL 细节





Accessories 配件








217

^{*}For retail or wholesale, you can buy accessories seprately,零售或批发,配件可单独购买。 *For project, you can tell us what exactly you want, we will recommend relatively proper elatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。

9037PM

PRISMATIC DIFFUSER UGR<19

棱晶防眩罩 眩光值<19

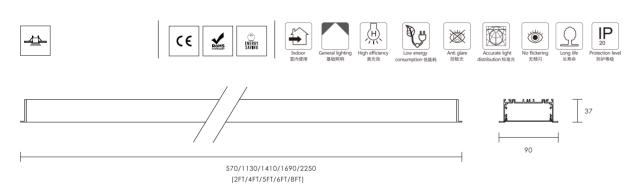

PRODUCT FEATURE 产品特点

- · Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming, dali dimming and color changing driver.
 Long lifespan up to 50000hours, low decay and low maintanence cost.
- Distinguished end-caps, No screw to be appeared, No light leak.
- High grade aluminum, high quality surface painting.
- · Fast and easy connection with no shadow.
- \cdot High efficiency PC and even light distribution, no shawdon, anti-glare feature, easy installation to any shape.
- · Application:Office,School,Hospital,Supermartket,Shopping Mall,Hotel,Public Area
- 灯具电器选用无频闪、质保5年品牌驱动电源,配进口高亮度SMD光源,另可选配1-10V调光、DAL调光、调色温驱动电源。
- 寿命长达5万小时,光衰小、减少后期维护费用。
- 无螺丝不漏光端盖,灯具线条硬朗美观、外观尺寸比例科学合理,安装方式灵活。 灯体材料采用优质铝合金,表面静电喷涂处理,坚固耐用不易变色和刮花。
- 高透光扩散PC罩,出光均匀,防炫效果好
- 应用场所:写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数




Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LR9037PM-600	570*90*37mm(2FT)	18W	3060Lm	1800Lm
LR9037PM-1200	1130*90*37mm(4FT)	36W	6120Lm	3600Lm
LR9037PM-1500	1410*90*37mm(5FT)	45W	7650Lm	4500Lm
LR9037PM-1800	1690*90*37mm(6FT)	54W	9180Lm	5400Lm
LR9037PM-2400	2250*90*37mm(8FT)	72W	12240Lm	7200Lm


PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None □ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线







CONTINUOUS 连接件

180° Extender 直连接件

L Shape Corner

X Shape Corner


十字形连接件



T Shape Corner T字形连接件



DETAIL 细节





Accessories 配件







^{*}For retail or wholesale,you can buy accessories seprately.零售或批发,配件可单独购买。

9037 | 219

^{*}For project, you can tell us what exactly you want, we will recommend relatively proper accessories.工程项目,请告知你的需求,我们会推荐合适配件。





1. RedBull Offices | Architecture: Mussa Arquitectos.








BCI Pagos Offices | Architecture: | Lighting Design: | 2. Indura Offices | Architecture: Armas Elton Arquitectos. | Lighting Design: Diseño de Luz.
 Novo Nordisk | Architecture: FMZ Arquitectura | Lighting Design: Docevolts-Francisca Nicoletti







1. Forus Offices | Architecture: Armas Elton Arquitectos | Lighting Design: Diseño de Luz. | 2. Novo Nordisk | Architecture: FMZ Arquitectura. | Lighting Design: Docevolts-Francisca Nicoletti.
3. Indura Offices | Architecture: Armas Elton Arquitectos | Lighting Design: Diseño de Luz.

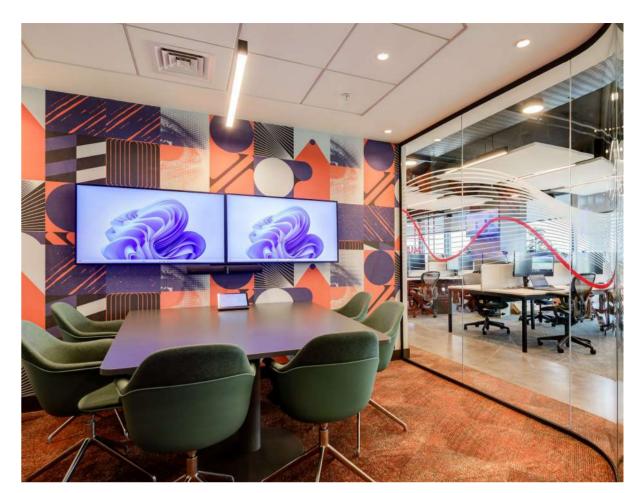



1. Murex Offices | Architecture and Lighting Design: Collective Architecture. | 2. IGS Group Offices | Architecture: Elton y Leniz Arquitectos | Lighting Design: LEVO Studio.