
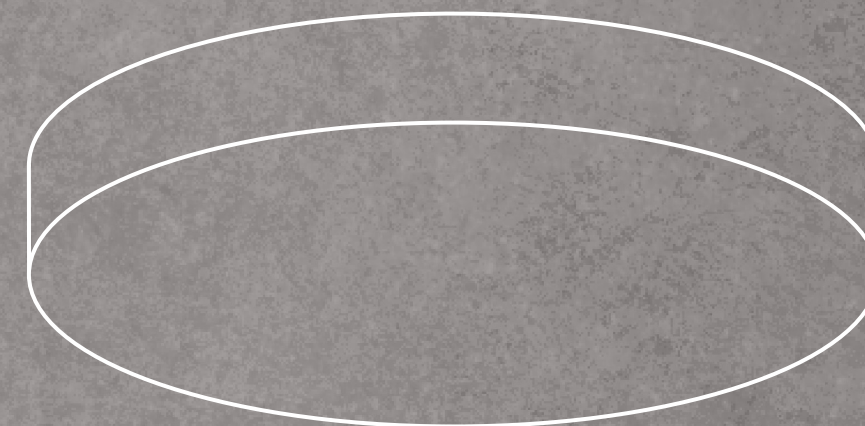
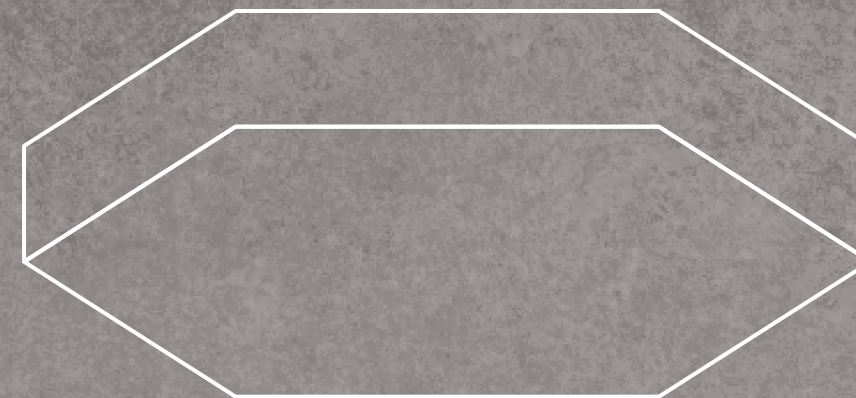


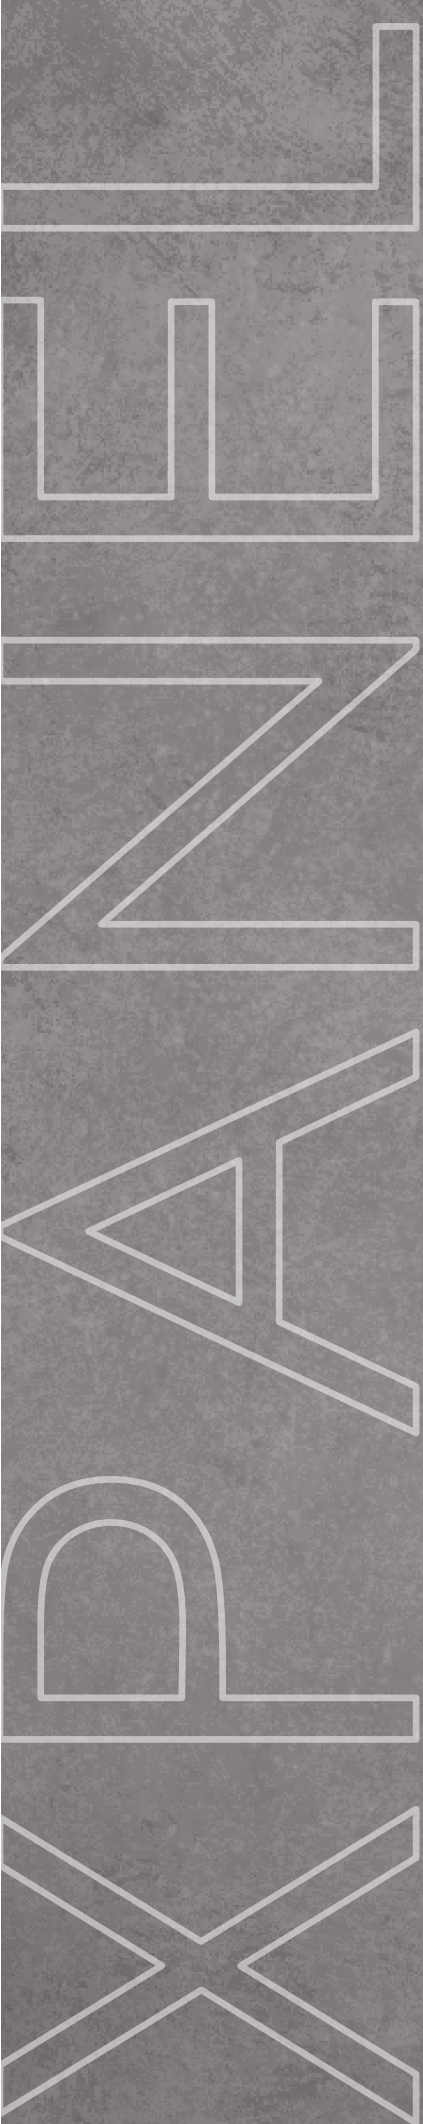

XPANEL SERIES


SUSPENDED / SURFACE

XPANEL SERIES

LED PANEL
SURFACE | SUSPENDED

The XPANEL series offers circular and hexagonal LED panels in different sizes, designed with a thicker profile that delivers a higher luminous output.

Suitable for suspended or surface mounting, they are the perfect choice for projects with technical requirements and for large or high-ceiling spaces where powerful and efficient lighting is essential. Beyond functionality, XPANEL luminaires also become architectural features, adding character and presence to every environment — a fusion of light and design that elevates spaces with elegance and strength.

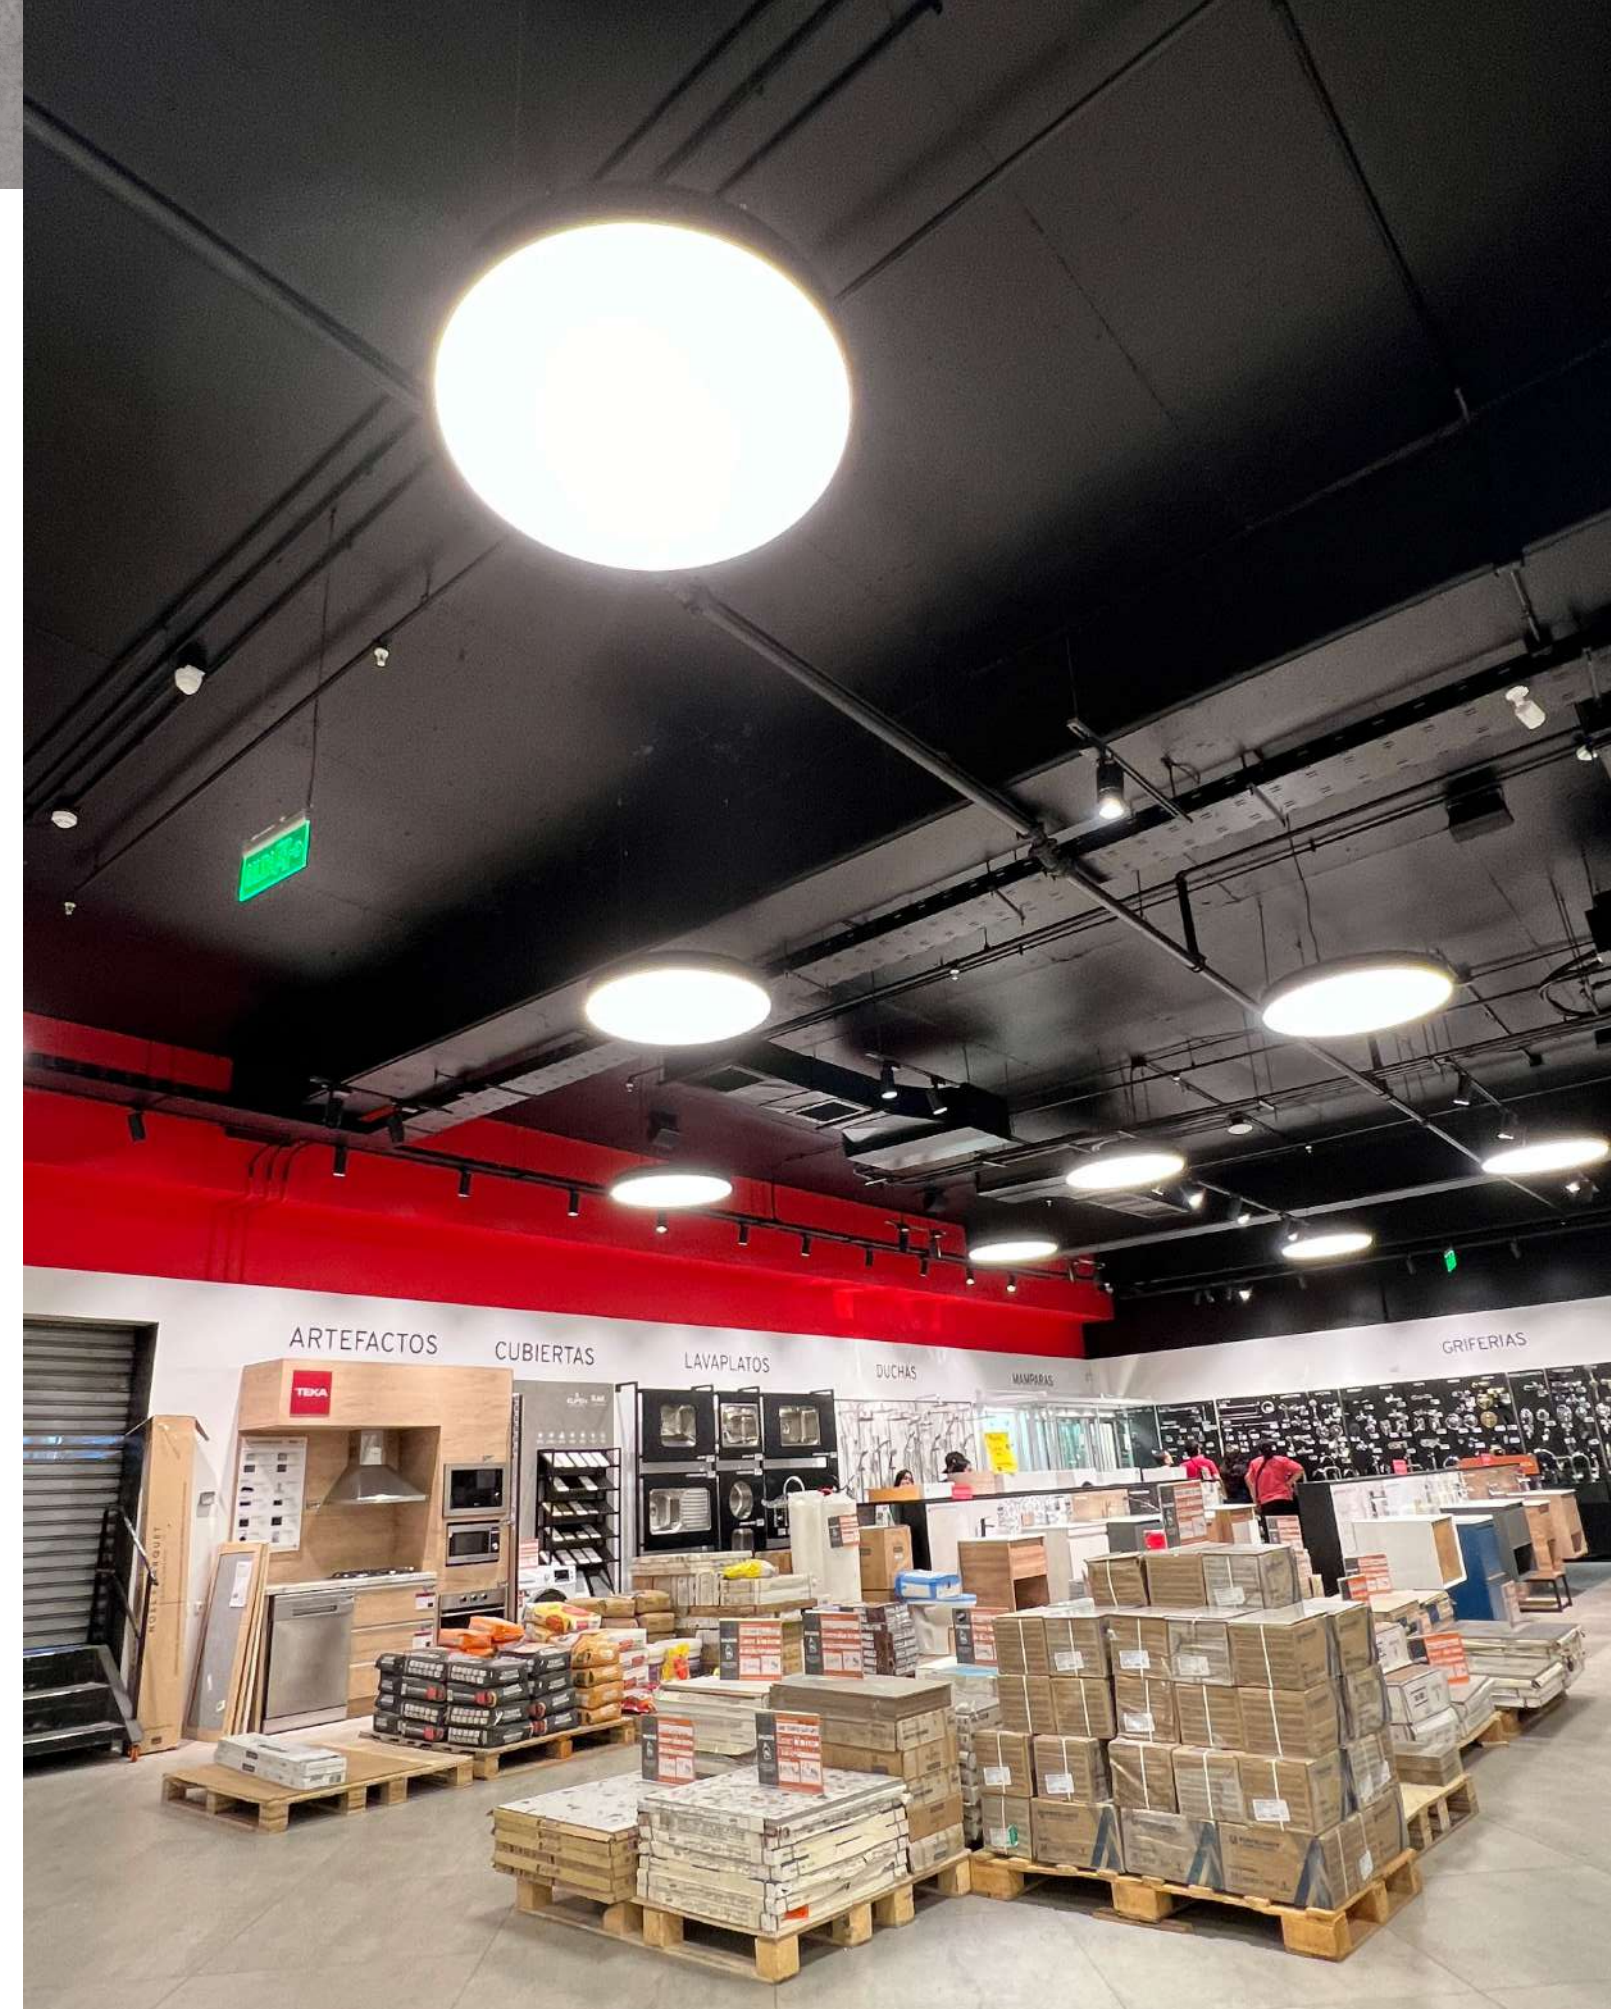

TRIMLESS

This frameless panel differs from traditional LED panels with wide frame edges. When illuminated, the frame becomes invisible, achieving a seamless integration with the ceiling.

Equipped with a high-efficiency LGP (Light Guide Plate) and a PMMA (Polymethyl Methacrylate) diffuser, it delivers a luminous output that is even and uniform, bringing comfort and elegance to every project.



XP27

Round Frameless
无边框



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防炫效果好

应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP27-300	D300*H27mm	24W	4590Lm	2400Lm
	XP27-450	D450*H27mm	36W	6840Lm	3600Lm
	XP27-600	D600*H27mm	48W	9180Lm	4800Lm

PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☒ 4000K ☒ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours, half power
Sensor	☐ None

DIMENSION OPTIONS

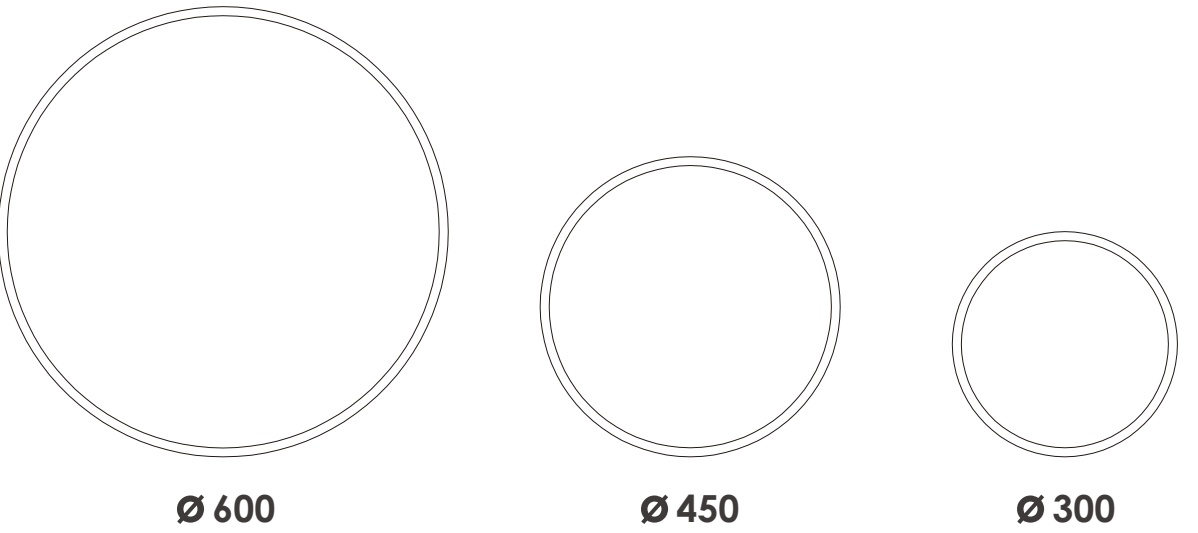

OPAL DIFFUSER
120LM/W
乳白亚克力罩
120流明/瓦

MICROPRISMATIC COVER
棱晶防眩罩



Also available with
Microprismatic cover

GLARE FREE


UGR < 19

无眩光
眩光值小于19

FLEXIBILITY IN APPLICATION

- Available in different versions and LED performance classes.
- Choose the translucent cover for uniform illumination.
- Select the microprismatic variant for glare-free office lighting with an optimum UGR < 19.
- Particularly in large-scale projects, this wide range of options provides significant advantages: different room concepts can be implemented cost-effectively and energy-efficiently, while maintaining a clean and consistent design style.

MOUNTING OPTIONS 安装方式

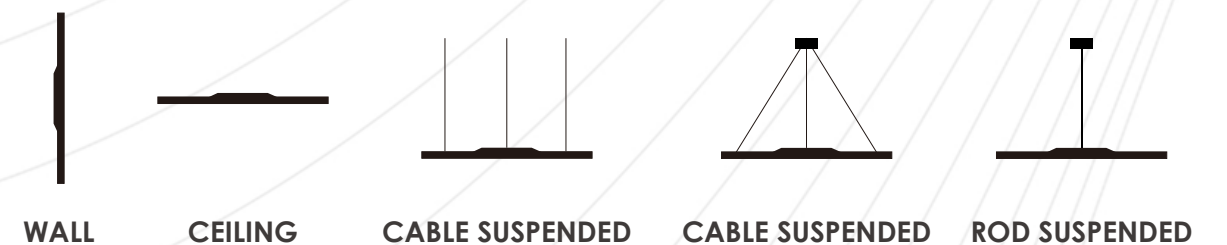

SURFACED


- Round luminaire with a seamless, powder-coated aluminum housing.
- Quick, tool-free mounting system.
- Equipped with energy-efficient LEDs and excellent color rendering.
- Provides uniform, homogeneous illumination.
- Available with direct or direct/indirect light distribution, using satinized or microprismatic PMMA covers.



XP62P

OPAL DIFFUSER

亚克力罩



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防炫效果好。应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP62P-450	D450*H62mm	30W	5400Lm	3300Lm
	XP62P-600	D600*H62mm	40W	6800Lm	4800Lm
	XP62P-900	D900*H62mm	60W	10200Lm	7200Lm
	XP62P-1200	D1200*H62mm	80W	13600Lm	9600Lm
	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP62PU-450	D600*H62mm	45W	7690Lm	5000Lm
	XP62PU-600	D600*H62mm	60W	10200Lm	7200Lm
	XP62PU-900	D900*H62mm	90W	15300Lm	10800Lm
	XP62PU-1200	D1200*H62mm	120W	20400Lm	14400Lm

XP62PM

PRISMATIC DIFFUSER
UGR<19

棱晶防眩罩
眩光值<19



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防炫效果好。应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP62PM-450	D450*H62mm	30W	5400Lm	3300Lm
	XP62PM-600	D600*H62mm	40W	6800Lm	4800Lm
	XP62PM-900	D900*H62mm	60W	10200Lm	7200Lm
	XP62PM-1200	D1200*H62mm	80W	13600Lm	9600Lm
	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP62PMU-450	D600*H62mm	45W	7690Lm	5000Lm
	XP62PMU-600	D600*H62mm	60W	10200Lm	7200Lm
	XP62PMU-900	D900*H62mm	90W	15300Lm	10800Lm
	XP62PMU-1200	D1200*H62mm	120W	20400Lm	14400Lm




IGS Group Offices | Architecture: Elton y Leniz Arquitectos. | Lighting Design: LEVO Studio.

XP105P

OPAL DIFFUSER

亚克力罩



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防眩效果好。应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP105P-450	D450*H62mm	30W	5400Lm	3300Lm
	XP105P-600	D600*H62mm	40W	6800Lm	4800Lm
	XP105P-900	D900*H62mm	60W	10200Lm	7200Lm
	XP105P-1200	D1200*H62mm	80W	13600Lm	9600Lm
	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP105PU-450	D600*H62mm	45W	7690Lm	5000Lm
	XP105PU-600	D600*H62mm	60W	10200Lm	7200Lm
	XP105PU-900	D900*H62mm	90W	15300Lm	10800Lm
	XP105PU-1200	D1200*H62mm	120W	20400Lm	14400Lm




Rosen Showroom | Lighting Design: Luxia.

XP105PM

PRISMATIC DIFFUSER
UGR<19

棱晶防眩罩
眩光值<19



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防眩效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP105PM-450	D450*H62mm	30W	5400Lm	3300Lm
XP105PM-600	D600*H62mm	40W	6800Lm	4800Lm
XP105PM-900	D900*H62mm	60W	10200Lm	7200Lm
XP105PM-1200	D1200*H62mm	80W	13600Lm	9600Lm



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP105PMU-450	D600*H62mm	45W	7690Lm	5000Lm
XP105PMU-600	D600*H62mm	60W	10200Lm	7200Lm
XP105PMU-900	D900*H62mm	90W	15300Lm	10800Lm
XP105PMU-1200	D1200*H62mm	120W	20400Lm	14400Lm




IGS Group Offices | Architecture: Elton y Leniz Arquitectos. | Lighting Design: LEVO Studio.

XP65P

OPAL DIFFUSER

亚克力罩



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防炫效果好。应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数


	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP65P-450	D450*H65mm	30W	5400Lm	3300Lm
	XP65P-600	D600*H65mm	40W	6800Lm	4800Lm
	XP65P-900	D900*H65mm	60W	10200Lm	7200Lm
	XP65P-1200	D1200*H65mm	80W	13600Lm	9600Lm
	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP65PU-450	D600*H65mm	45W	7690Lm	5000Lm
	XP65PU-600	D600*H65mm	60W	10200Lm	7200Lm
	XP65PU-900	D900*H65mm	90W	15300Lm	10800Lm
	XP65PU-1200	D1200*H65mm	120W	20400Lm	14400Lm



XP65PM

PRISMATIC DIFFUSER
UGR<19

棱晶防眩罩



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防眩效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP65PM-450	D450*H65mm	30W	5400Lm	3300Lm
XP65PM-600	D600*H65mm	40W	6800Lm	4800Lm
XP65PM-900	D900*H65mm	60W	10200Lm	7200Lm
XP65PM-1200	D1200*H65mm	80W	13600Lm	9600Lm



Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP65PMU-450	D600*H65mm	45W	7690Lm	5000Lm
XP65PMU-600	D600*H65mm	60W	10200Lm	7200Lm
XP65PMU-900	D900*H65mm	90W	15300Lm	10800Lm
XP65PMU-1200	D1200*H65mm	120W	20400Lm	14400Lm





HEXAGON

六边形

OPAL DIFFUSER

亚克力罩




PRISMATIC DIFFUSER

防眩光棱晶罩



ACOUSTIC DIFFUSER


吸音板

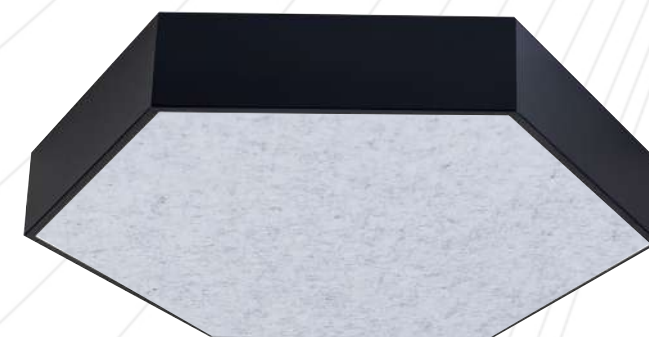

XH105P

OPAL DIFFUSER

亚克力罩



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。

灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。

灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。

高透光扩散型控光罩，出光均匀，防炫效果好

应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XH105PM-600	W600*H105mm	40W	6800Lm	4800Lm
	XH105PM-900	W900*H105mm	60W	10200Lm	7200Lm
	XH105PM-1200	W1200*H105mm	80W	13600Lm	9600Lm
	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XH105PMU-600	W600*H105mm	60W	10200Lm	7200Lm
	XH105PMU-900	W900*H105mm	90W	15300Lm	10800Lm
	XH105PMU-1200	W1200*H105mm	120W	20400Lm	14400Lm

PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

XH105PM

PRISMATIC DIFFUSER

防眩棱晶罩



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防眩效果好。应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XH105PM-600	W600*H105mm	40W	6800Lm	4800Lm
	XH105PM-900	W900*H105mm	60W	10200Lm	7200Lm
	XH105PM-1200	W1200*H105mm	80W	13600Lm	9600Lm
	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XH105PMU-600	W600*H105mm	60W	10200Lm	7200Lm
	XH105PMU-900	W900*H105mm	90W	15300Lm	10800Lm
	XH105PMU-1200	W1200*H105mm	120W	20400Lm	14400Lm

PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours, half power
Sensor	☐ None ☐ Motion and daylight sensor

