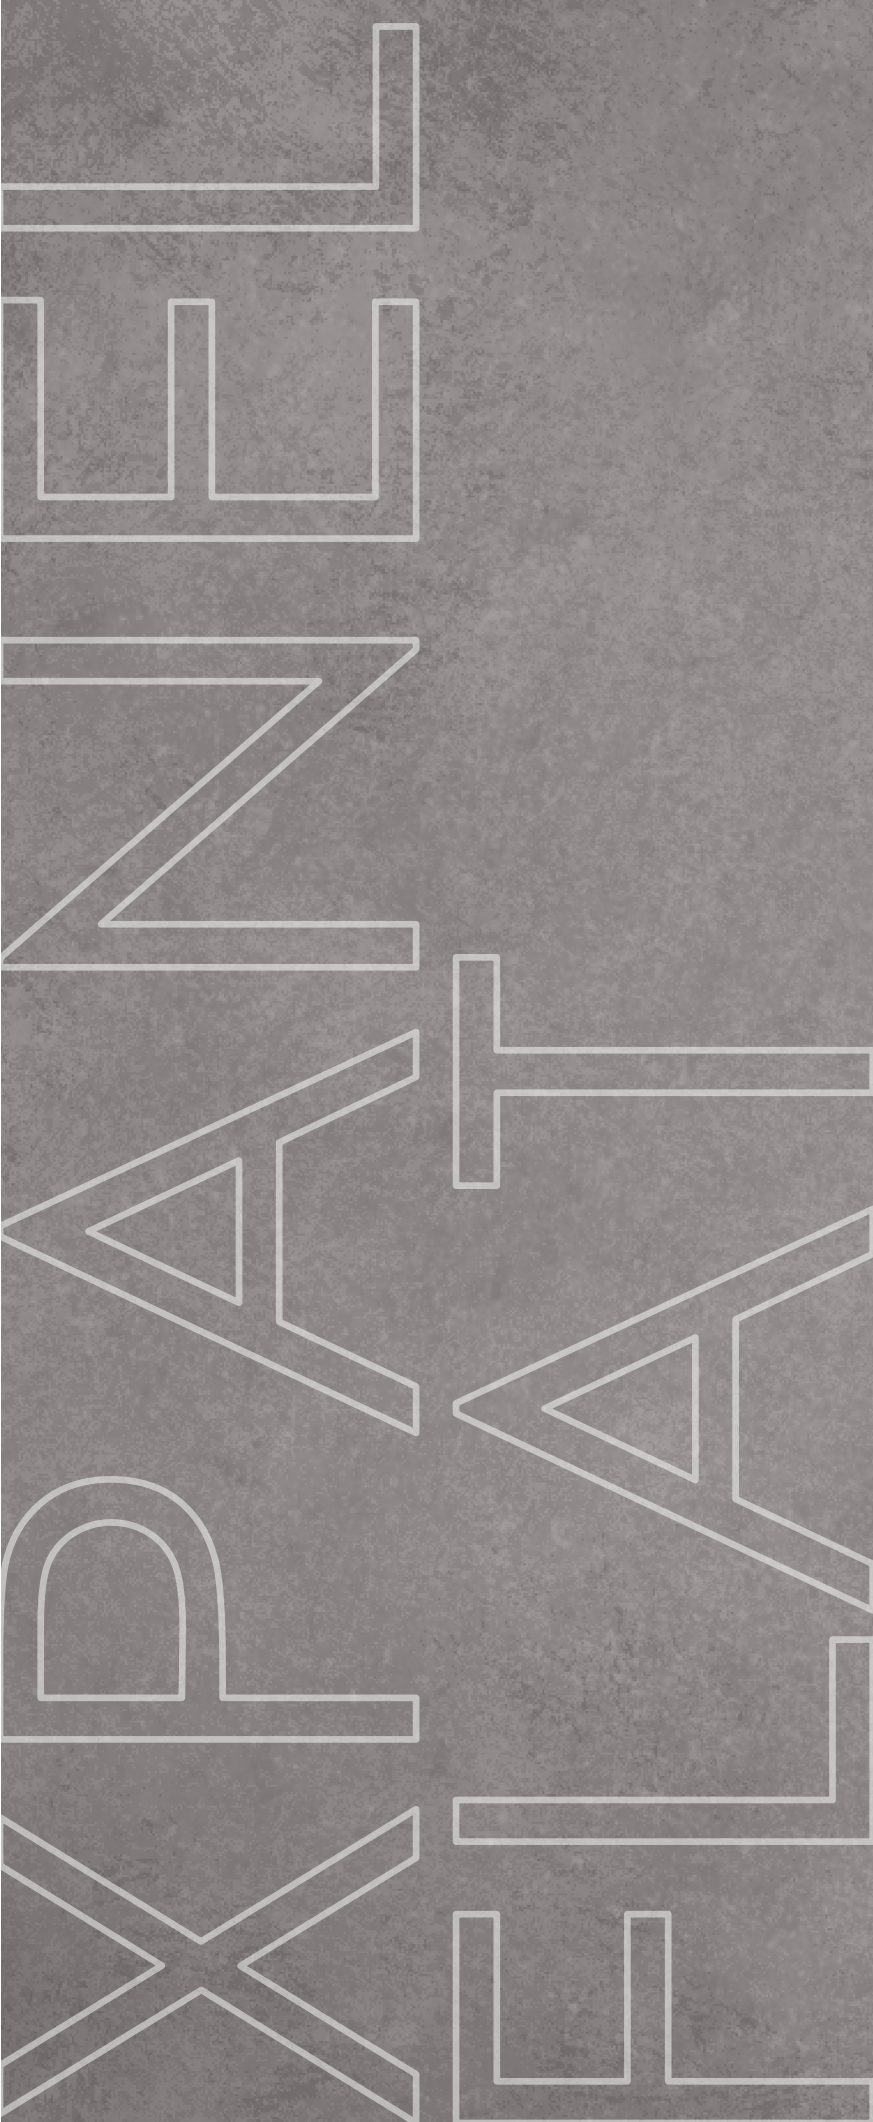


XPANEL FLAT SERIES

SUSPENDED / SURFACE


XPANEL FLAT SERIES

LED PANEL
SURFACE | SUSPENDED

The beauty of simplicity comes to life with XPANEL FLAT. Ultra-thin circular and square panels, suspended or surface-mounted, bring harmony and elegance to any environment. Thanks to their super-thin profile, they blend discreetly into architecture, almost invisible yet always delivering refined and functional light.

Combine different sizes to create unique compositions full of personality, or let a single panel become the subtle centerpiece that transforms the atmosphere.

Versatile and timeless, XPANEL FLAT adapts to both grand open spaces and intimate rooms, in residential or institutional settings. And when paired with round acoustic panels, light and comfort merge into a perfect balance.

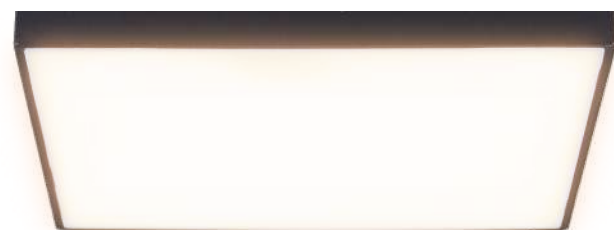

DIRECT

As a traditional panel, direct lighting is the basic version. It requires several strategically placed fixtures to achieve an even distribution of light across the space




DIRECT / INDIRECT

This option combines sidelighting with an additional indirect component, creating a more relaxing and ambient atmosphere. Ideal for making spaces feel comfortable, balanced, and inviting.

XP2017

CABLE SUSPENDED/PRISMATIC DIFFUSER

吊线安装/棱晶防眩罩



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防炫效果好。应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP2017-450PM-S	D450*H17mm	30W	7200Lm	3300Lm
	XP2017-600PM-S	D600*H17mm	40W	9600Lm	4400Lm
	XP2017-900PM-S	D900*H17mm	60W	14400Lm	6600Lm
	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP2017-450PMU-S	D450*H17mm	45W	10600Lm	4950Lm
	XP2017-600PMU-S	D600*H17mm	60W	14400Lm	6600Lm
	XP2017-900PMU-S	D900*H17mm	90W	21600Lm	9900Lm


PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours, half power
Sensor	☐ None

XP2017

ROD SUSPENDEd / PRISMATIC DIFFUSER

吊杆安装/棱晶防眩罩



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防炫效果好。应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP2017-450PM-R	D450*H17mm	30W	7200Lm	3300Lm
	XP2017-600PM-R	D600*H17mm	40W	9600Lm	4400Lm
	XP2017-900PM-R	D900*H17mm	60W	14400Lm	6600Lm
	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP2017-450PMU-R	D450*H17mm	45W	10600Lm	4950Lm
	XP2017-600PMU-R	D600*H17mm	60W	14400Lm	6600Lm
	XP2017-900PMU-R	D900*H17mm	90W	21600Lm	9900Lm


PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours, half power
Sensor	☐ None

XP2017

SURFACED / PRISMATIC DIFFUSER

吸顶/棱晶防眩罩



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防炫效果好。应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP2017-450PM-C	D450*H17mm	30W	7200Lm	3300Lm
	XP2017-600PM-C	D600*H17mm	40W	9600Lm	4400Lm
	XP2017-900PM-C	D900*H17mm	60W	14400Lm	6600Lm
	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP2017-450PMU-C	D450*H17mm	45W	10600Lm	4950Lm
	XP2017-600PMU-C	D600*H17mm	60W	14400Lm	6600Lm
	XP2017-900PMU-C	D900*H17mm	90W	21600Lm	9900Lm

PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours, half power
Sensor	☐ None



XP2017



FLUSH CEILING

Flush-mounted ceiling luminaires provide a clean, modern appearance, sitting just 1 mm from the ceiling.

They offer uniform illumination while maintaining a minimalist, seamless integration with the architecture — ideal for spaces that demand both functionality and design elegance.

GAP: 1MM



XP1826

PRISMATIC DIFFUSER

棱晶防眩罩



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防眩效果好。应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XP1826-450	D450*H26mm	30W	5100Lm	3000Lm
	XP1826-600	D600*H26mm	40W	6800Lm	4000Lm
	XP1826-900	D900*H26mm	60W	10200Lm	6000Lm

PRODUCT OPTION 可选产品配置

CCT	■ 3000K ■ 4000K ■ 5000K □ 6000K
CRI	□ 82+ □ 90+ □ 95+
Finish	□ White ■ Black ■ Silver ■ Custom Color
Dimming	□ On/off □ 1-10V □ DALI ■ Color Changing
Emergency	□ None □ 1.5 hours, half power
Sensor	□ None



Novo Nordisk Offices | Architecture: FMZ Arquitetura | Lighting Design: Docevolts Francisca Nicoletti.

ULTRA THIN


极致超薄




2 IN 1
Surfaced & Suspended
吸顶与吊装二合一

Also available with
Microprismarit cover
GLARE FREE
UGR < 19
无眩光
眩光值小于19

DIMENSION OPTIONS

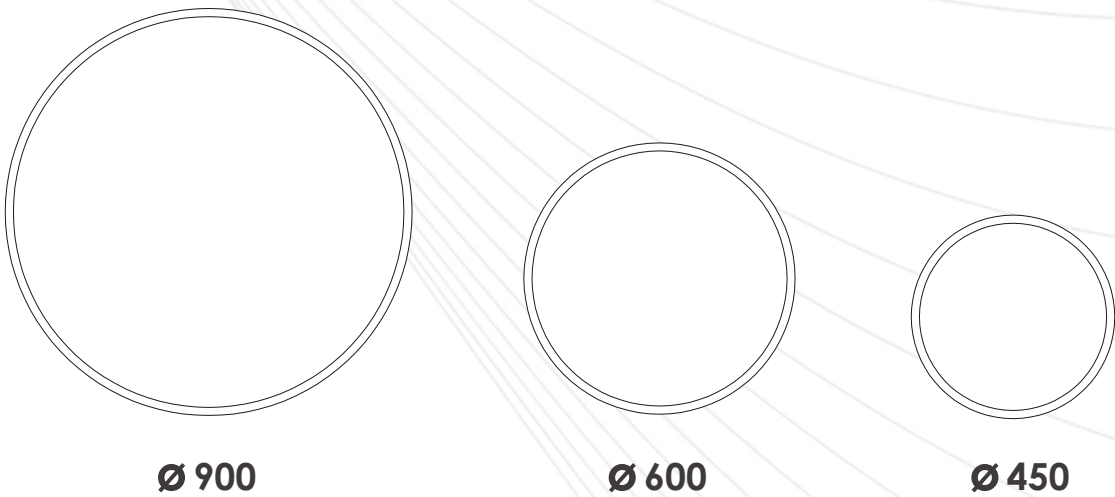

MOUNTING OPTIONS

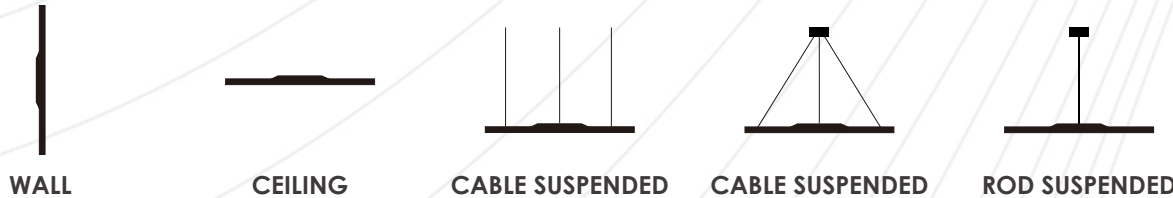


ULTRA THIN



SP27

Square Frameless

无边框

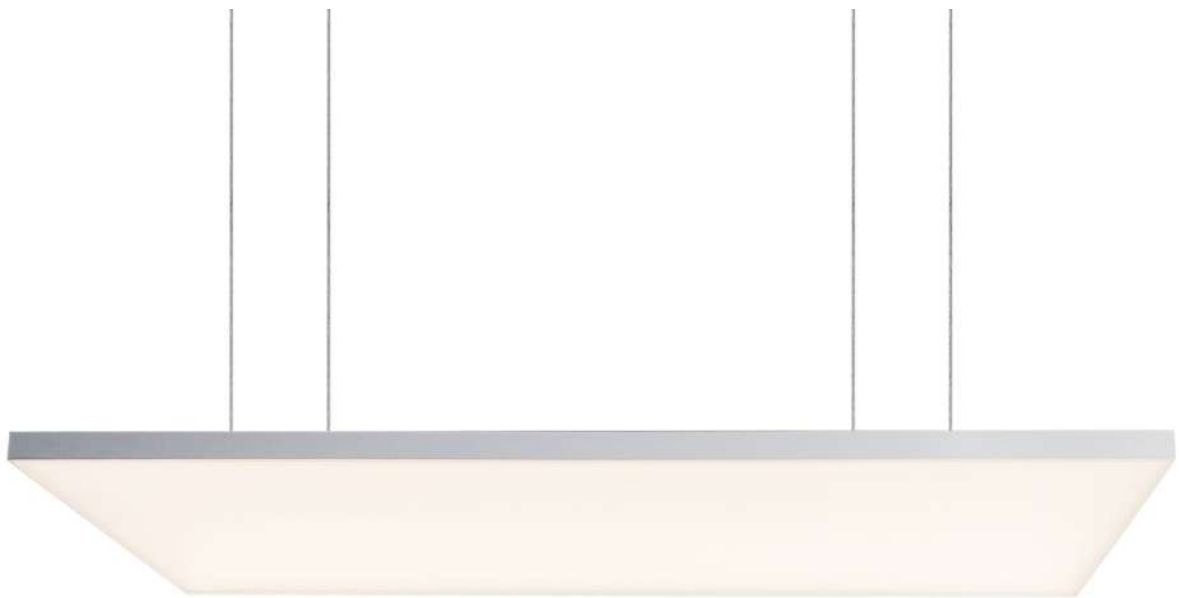

PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防炫效果好。应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	SP27-3030	300*300*H27mm	24W	4590Lm	2400Lm
	SP27-4545	450*450*H27mm	36W	6840Lm	3600Lm
	SP27-6060	600*600*H27mm	48W	9180Lm	4800Lm
	SP27-12018	1200*180*H27mm	24W	4590Lm	2400Lm
	SP27-15018	1500*180*H27mm	48W	9180Lm	4800Lm

PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours, half power
Sensor	☐ None

DIMENSION OPTIONS

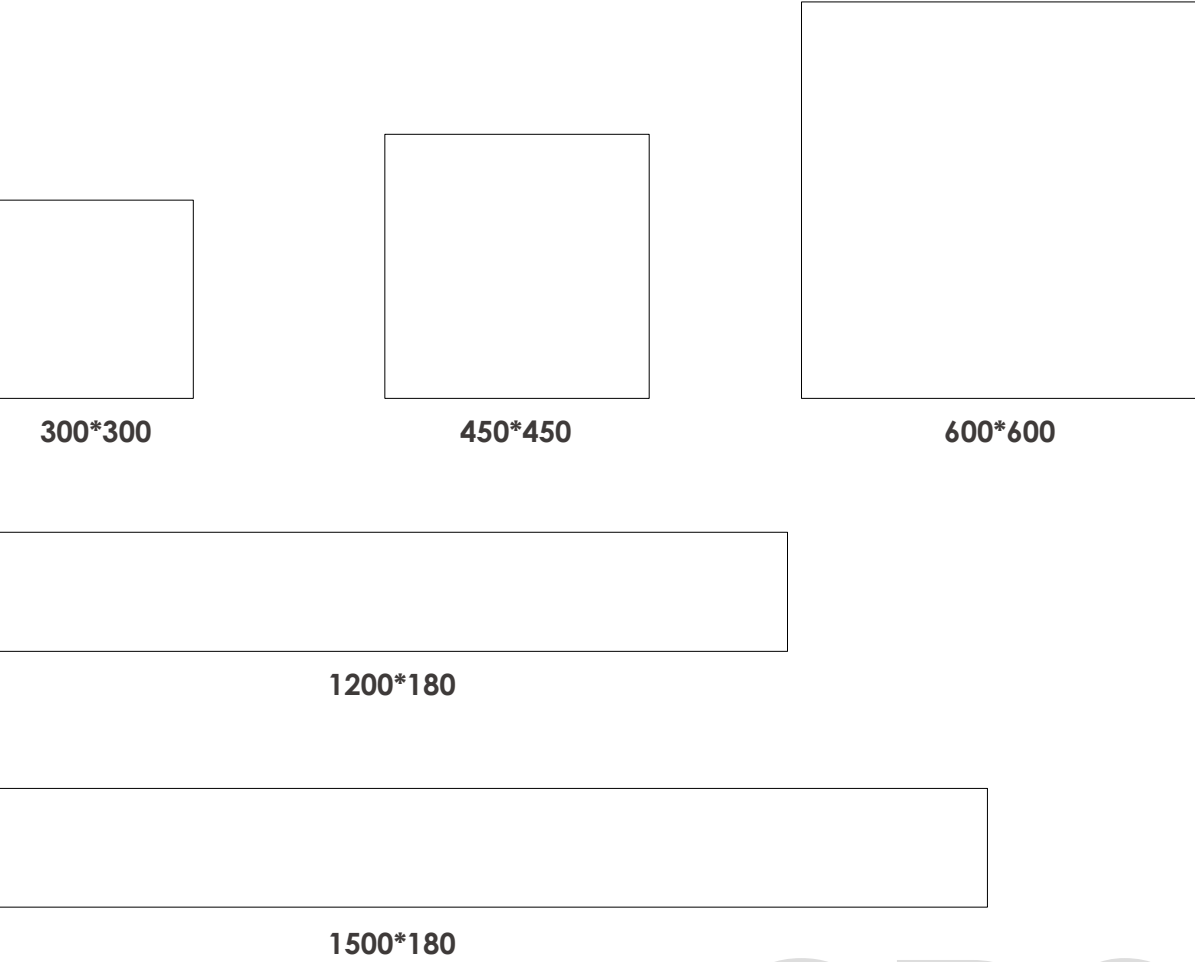



GLOBANT Offices | Architecture and Lighting Design: Ael Spaces.



Barrios Offices | Lighting Design: Diseño de Luz.