


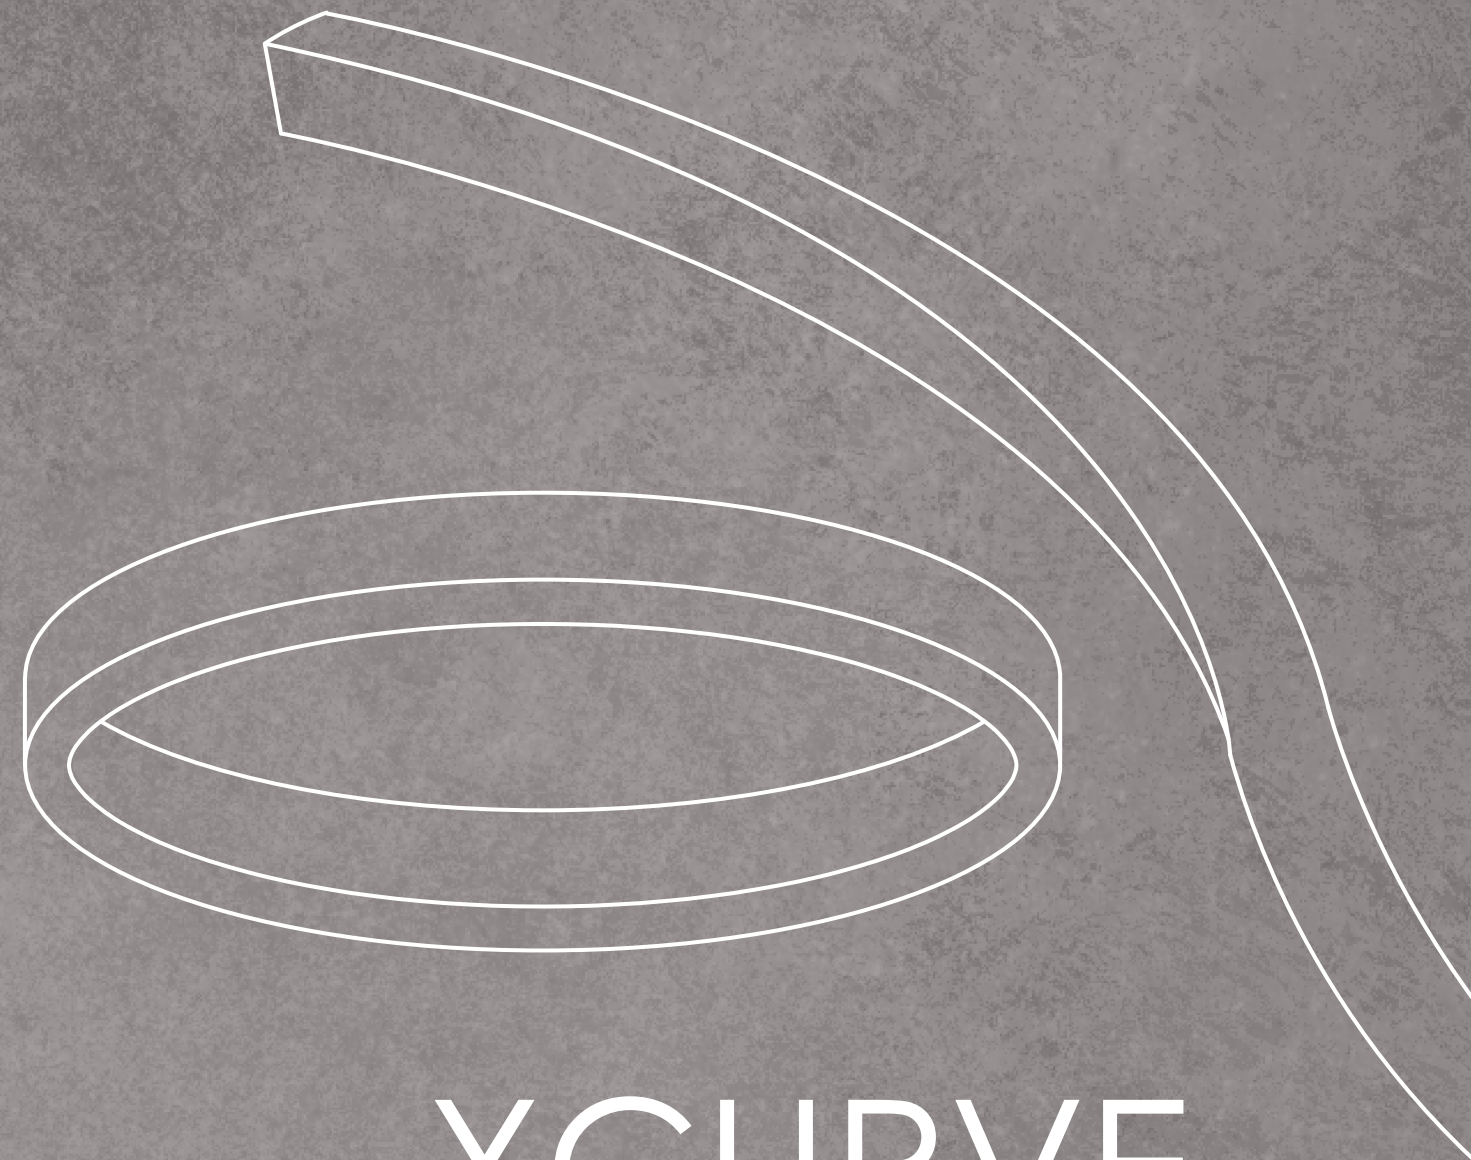

XCURVE XRING SERIES

SUSPENDED | SURFACE | RECESSED

XCURVE & XRING SERIES

LED RING & CURVE
SURFACE | SUSPENDED | RECESSED

Inspired by nature and its organic forms, XCURVE & XRING offer designers a versatile tool to create freely, combining straight lines, curves, and circular shapes that integrate seamlessly with architecture and interior design.




With refined finishes and a perfect balance between technical performance and decorative appeal, this series opens the door to endless design possibilities. Available with direct or indirect lighting, and ranging from compact sizes to impressive diameters of up to 5 meters, these luminaires can be used individually or combined to achieve unique compositions.

The result is lighting that brings sophistication, functionality, and character to any space, transforming projects into experiences where architecture and light converge in harmony.



DESIGN POSSIBILITIES


Free your creativity

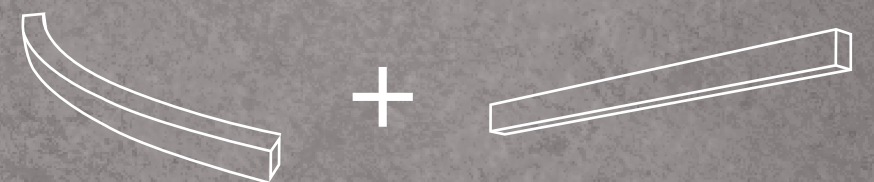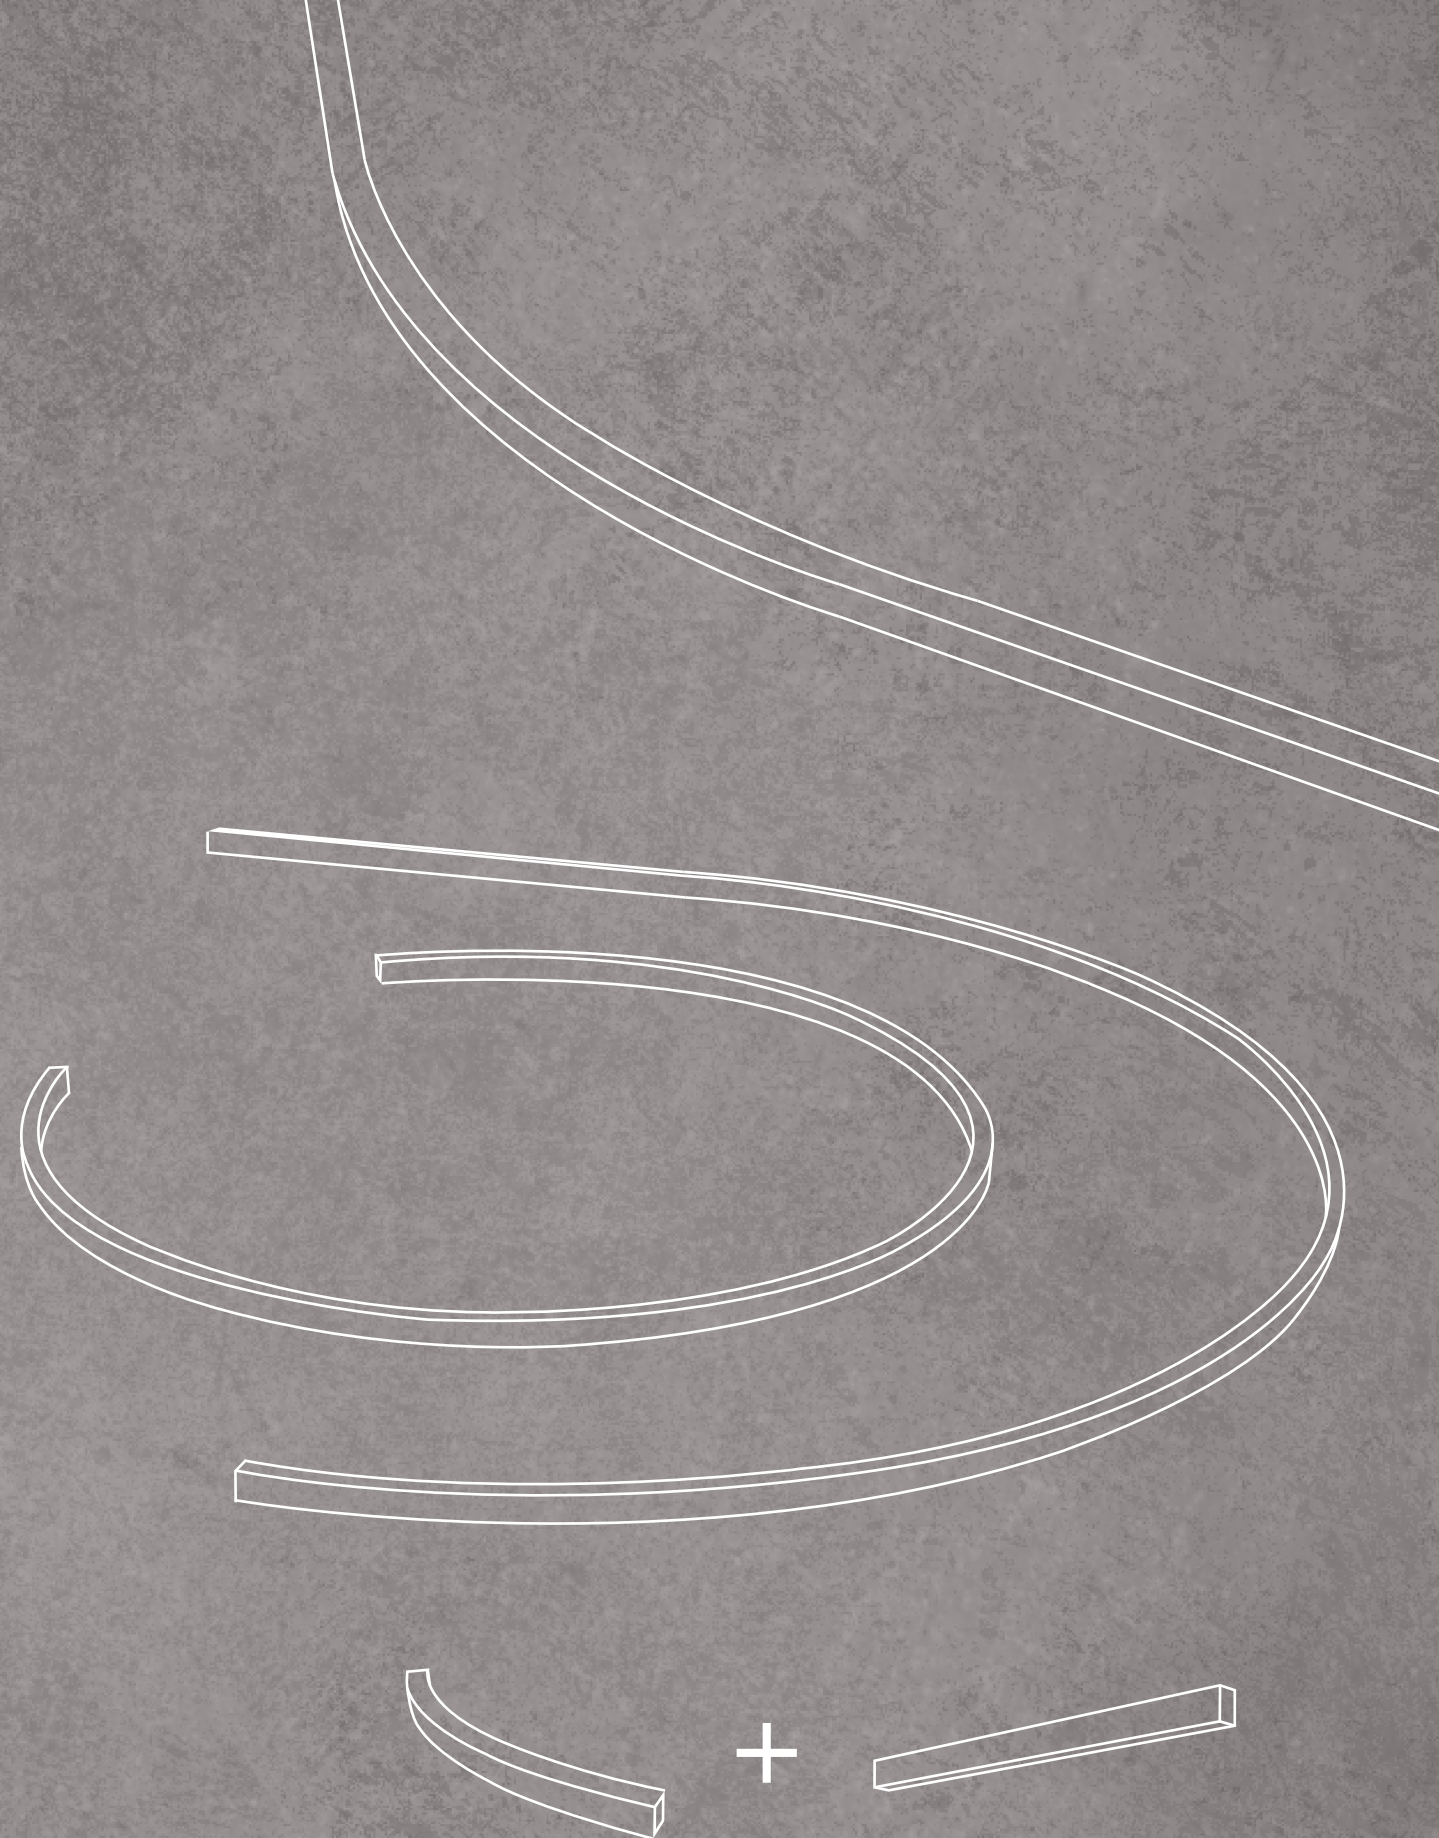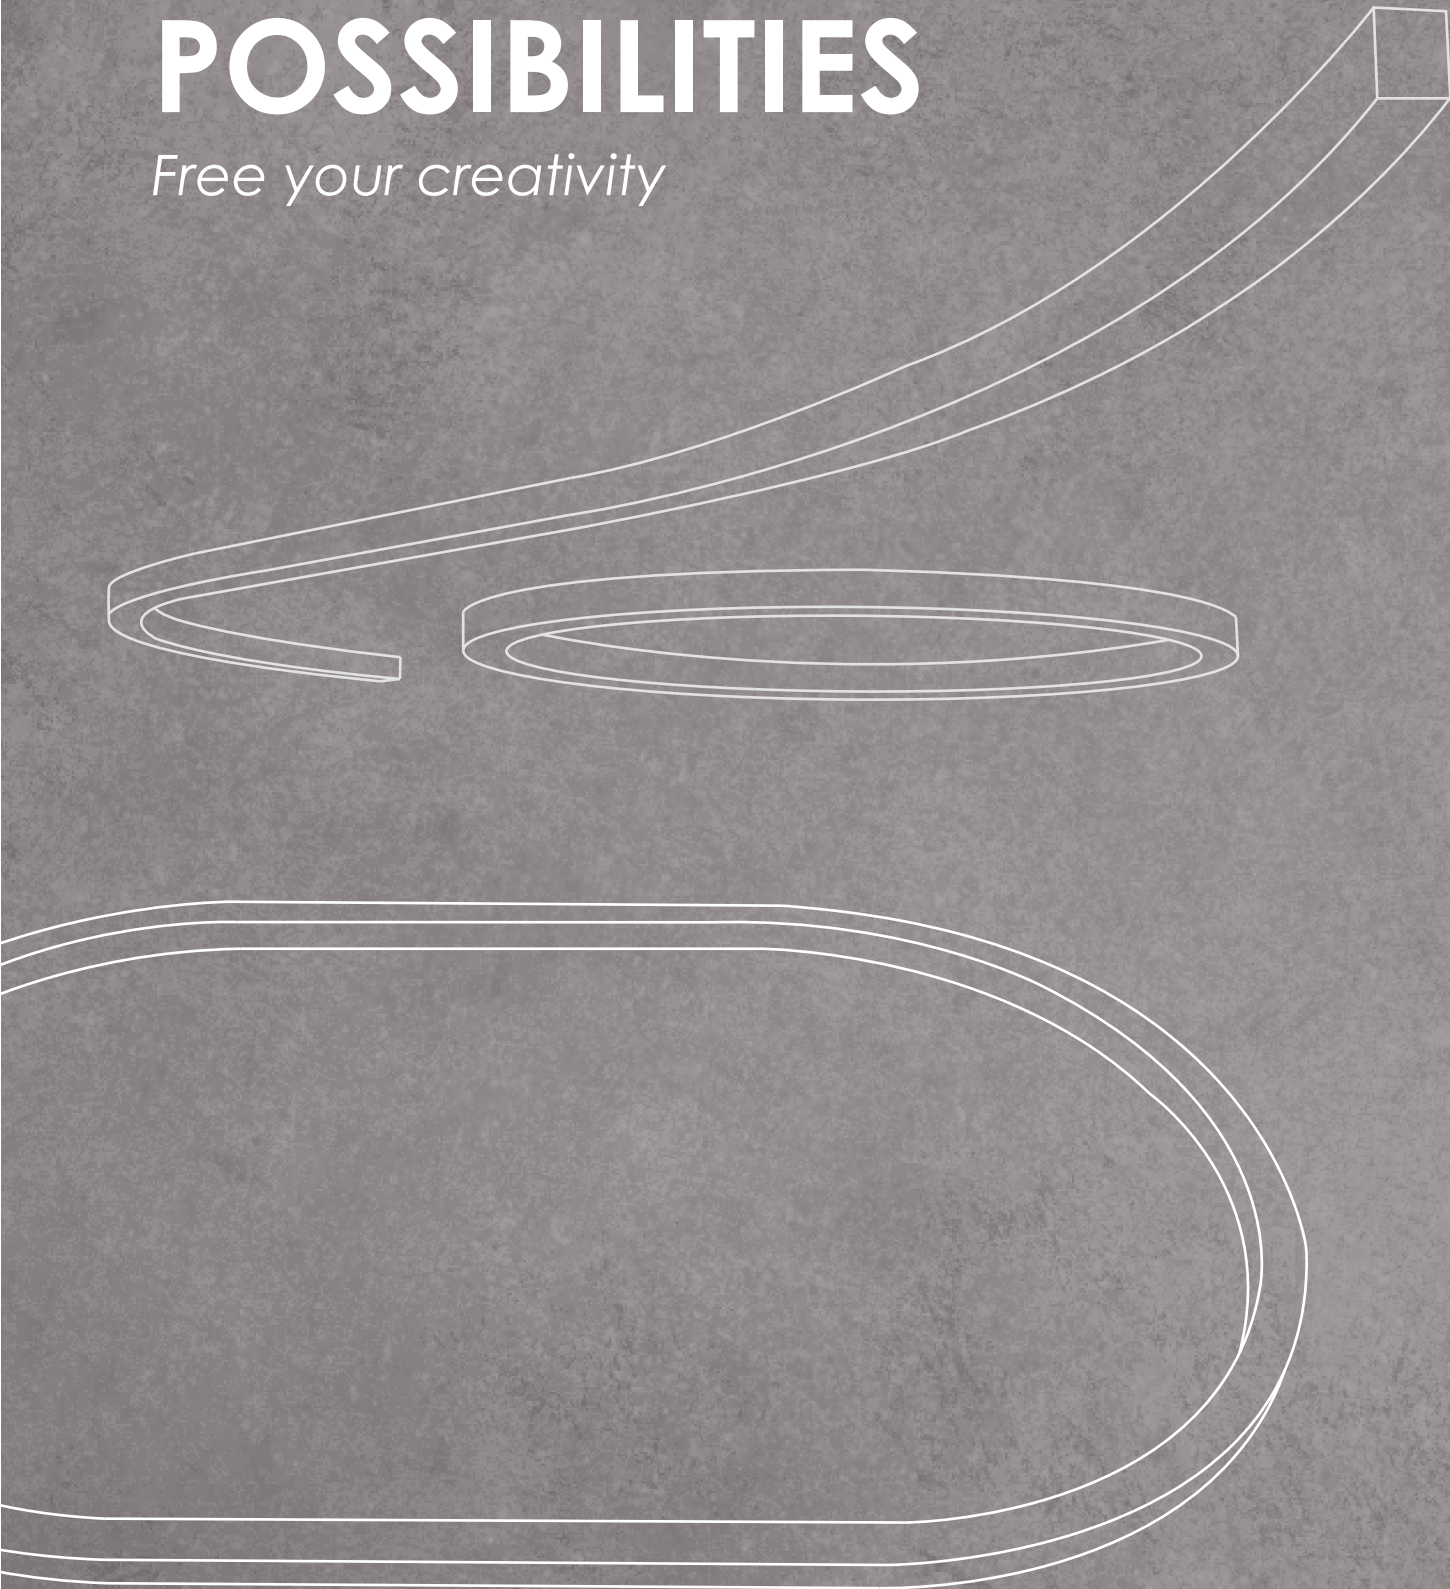

**Organic design made possible
with curves and straight lines.**



**WHITE FRAME +
BLACK TRIM**

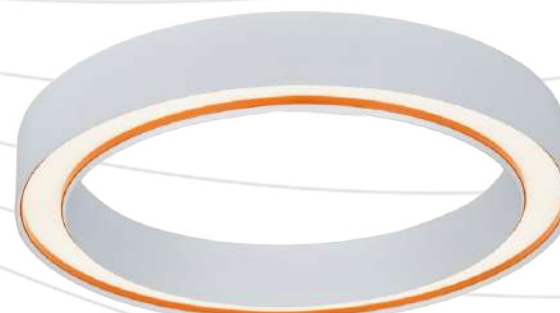

**WHITE FRAME +
ORANGE TRIM**



**GREY FRAME +
ORANGE TRIM**




**BLACK FRAME +
BLACK TRIM**



XR5580

CIRCULAR RING
圆环

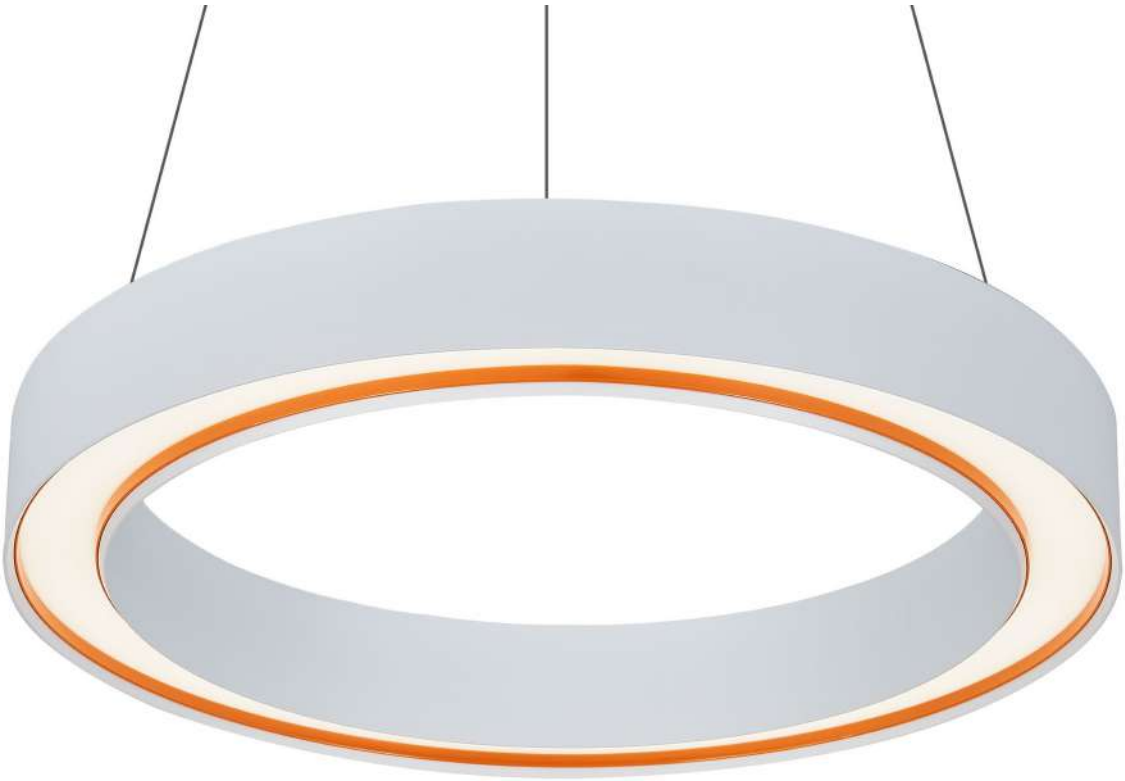

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light .distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XR5580-605	605*55*80mm(2FT)	30W	5100Lm	3000Lm
	XR5580-905	905*55*80mm(3FT)	40W	6800Lm	4000Lm
	XR5580-1205	1205*55*80mm(4FT)	60W	10200Lm	6000Lm
	XR5580-1505	1505*55*80mm(5FT)	95W	16150Lm	9500Lm
	XR5580-2005	2005*55*80mm(7FT)	125W	21250Lm	12500Lm
	XR5580-2405	2405*55*80mm(8FT)	150W	25500Lm	15000Lm
	XR5580-3005	3005*55*80mm(10FT)	190W	32300Lm	19000Lm
	XR5580-4005	4005*55*80mm(10FT)	252W	42700Lm	25200Lm
	XR5580-5005	5005*55*80mm(16FT)	315W	53550Lm	31500Lm
	Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XR5580-605	605*55*80mm(2FT)	30W	5100Lm	3000Lm
	XR5580-905	905*55*80mm(3FT)	40W	6800Lm	4000Lm
	XR5580-1205	1205*55*80mm(4FT)	60W	10200Lm	6000Lm
	XR5580-1505	1505*55*80mm(5FT)	95W	16150Lm	9500Lm
	XR5580-2005	2005*55*80mm(7FT)	125W	21250Lm	12500Lm
	XR5580-2405	2405*55*80mm(8FT)	150W	25500Lm	15000Lm
	XR5580-3005	3005*55*80mm(10FT)	190W	32300Lm	19000Lm
	XR5580-4005	4005*55*80mm(10FT)	252W	42700Lm	25200Lm
	XR5580-5005	5005*55*80mm(16FT)	315W	53550Lm	31500Lm
	XR5580-10005	10000*55*80mm(32FT)	620W	10540Lm	62000Lm

PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DIMENSION OPTIONS

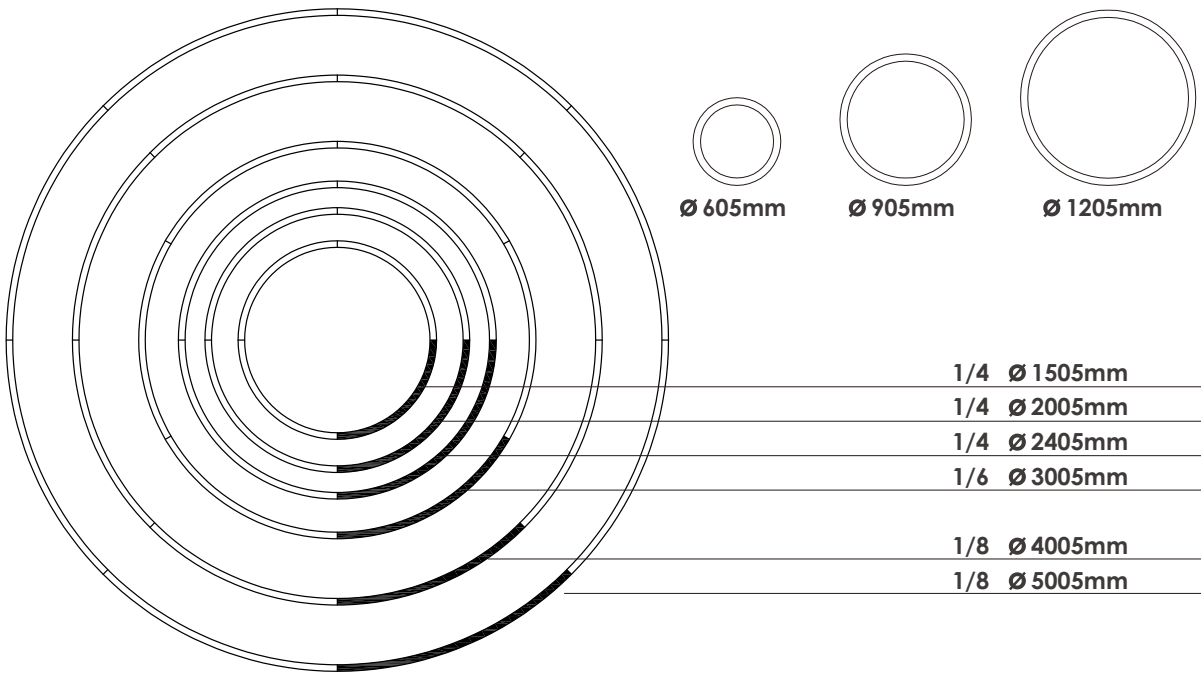



XR5070

CIRCULAR RING
圆环



PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light .distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XR5070-600	600*50*70mm(2FT)	30W	5100Lm	3000Lm
	XR5070-900	900*50*70mm(3FT)	40W	6800Lm	4000Lm
	XR5070-1200	1200*50*70mm(4FT)	60W	10200Lm	6000Lm
	XR5070-1500	1500*50*70mm(5FT)	95W	16150Lm	9500Lm
	XR5070-2000	2000*50*70mm(7FT)	125W	21250Lm	12500Lm
	XR5070-2400	2400*50*70mm(8FT)	150W	25500Lm	15000Lm
	XR5070-3000	3000*50*70mm(10FT)	190W	32300Lm	19000Lm
	XR5070-4000	4000*50*70mm(10FT)	190W	42700Lm	25200Lm
	XR5070-5000	5000*50*70mm(16FT)	315W	53550Lm	31500Lm
	Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XR5070-600	600*50*70mm(2FT)	30W	5100Lm	3000Lm
	XR5070-900	900*50*70mm(3FT)	40W	6800Lm	4000Lm
	XR5070-1200	1200*50*70mm(4FT)	60W	10200Lm	6000Lm
	XR5070-1500	1500*50*70mm(5FT)	95W	16150Lm	9500Lm
	XR5070-2000	2000*50*70mm(7FT)	125W	21250Lm	12500Lm
	XR5070-2400	2400*50*70mm(8FT)	150W	25500Lm	15000Lm
	XR5070-3000	3000*50*70mm(10FT)	190W	32300Lm	19000Lm
	XR5070-4000	4000*50*70mm(10FT)	190W	42700Lm	25200Lm
	XR5070-5000	5000*50*70mm(16FT)	315W	53550Lm	31500Lm
	XR5070-10000	10000*50*70mm(32FT)	620W	10540Lm	62000Lm

PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DIMENSION OPTIONS

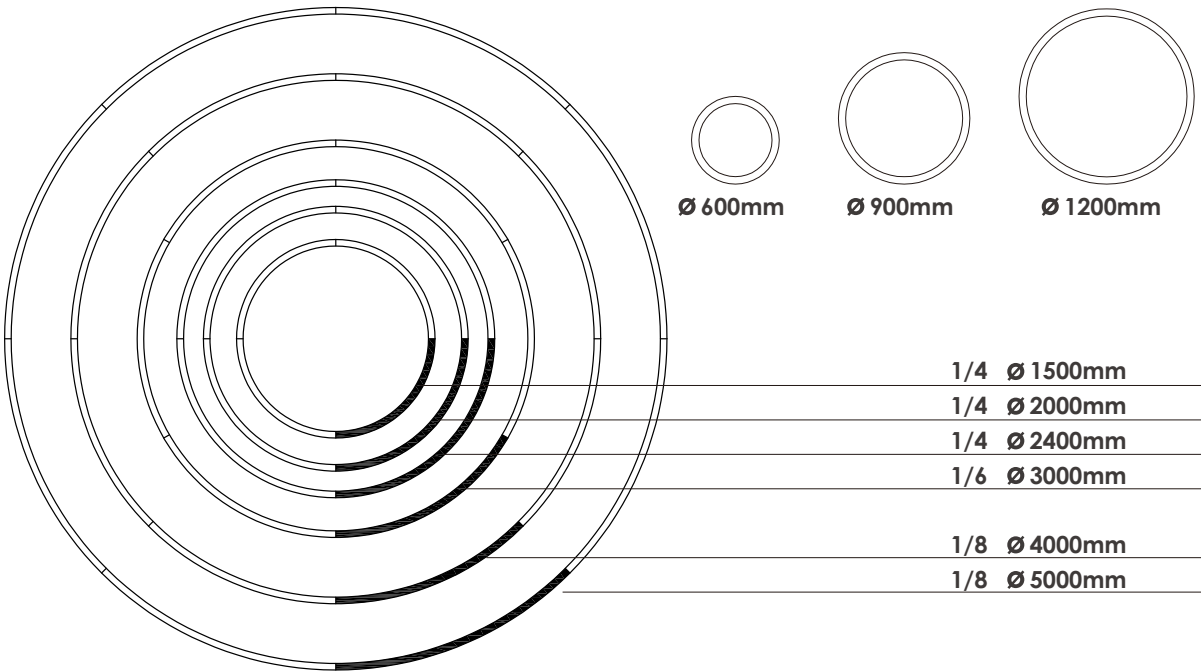

XR3535

CIRCULAR RING
圆环



PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light .distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
XR3535-600	600*35*35mm(2FT)	30W	5100Lm	1500Lm
XR3535-900	900*35*35mm(3FT)	40W	6800Lm	2000Lm
XR3535-1200	1200*35*35mm(4FT)	60W	10200Lm	3000Lm
XR3535-1500	1485*35*35mm(5FT)	95W	16150Lm	4750Lm
XR3535-2000	1985*35*35mm(7FT)	125W	21250Lm	6250Lm
XR3535-2400	2385*35*35mm(8FT)	150W	25500Lm	7500Lm
XR3535-3000	2985*35*35mm(10FT)	190W	32300Lm	9500Lm
XR3535-5000	4985*35*35mm(16FT)	315W	53550Lm	15750Lm
XR3535-10000	9985*35*35mm(32FT)	620W	10540Lm	31000Lm

PRODUCT OPTION 可选产品配置


CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DIMENSION OPTIONS

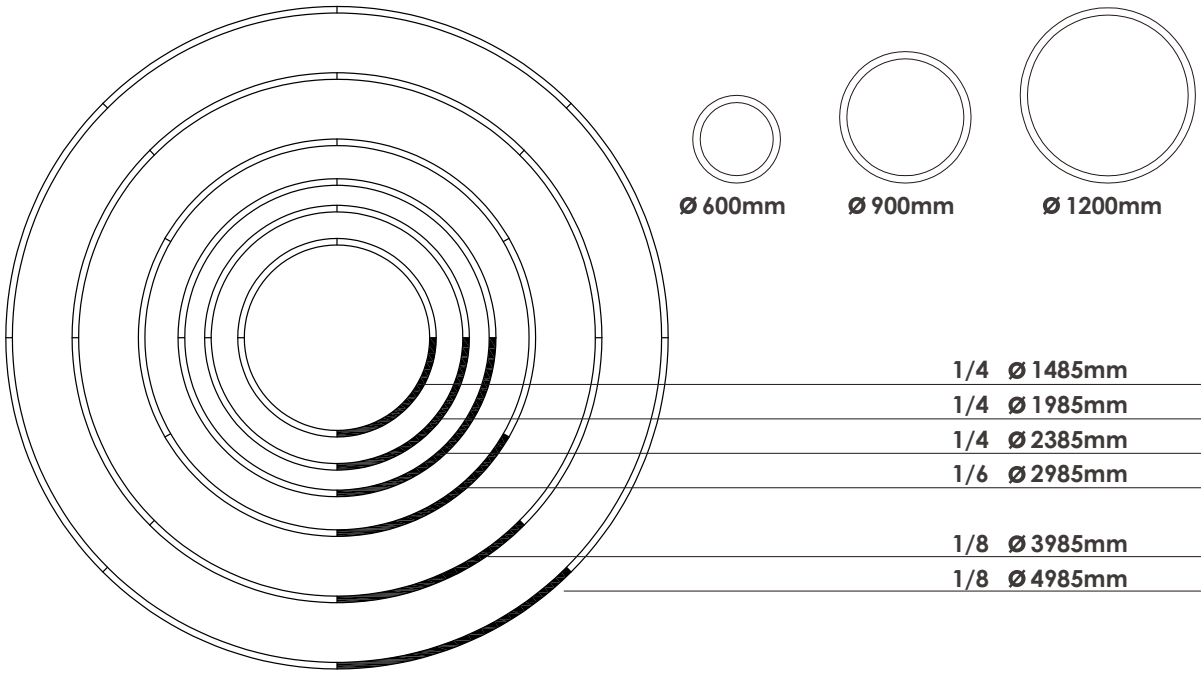

XR6080

CIRCULAR RING
圆环

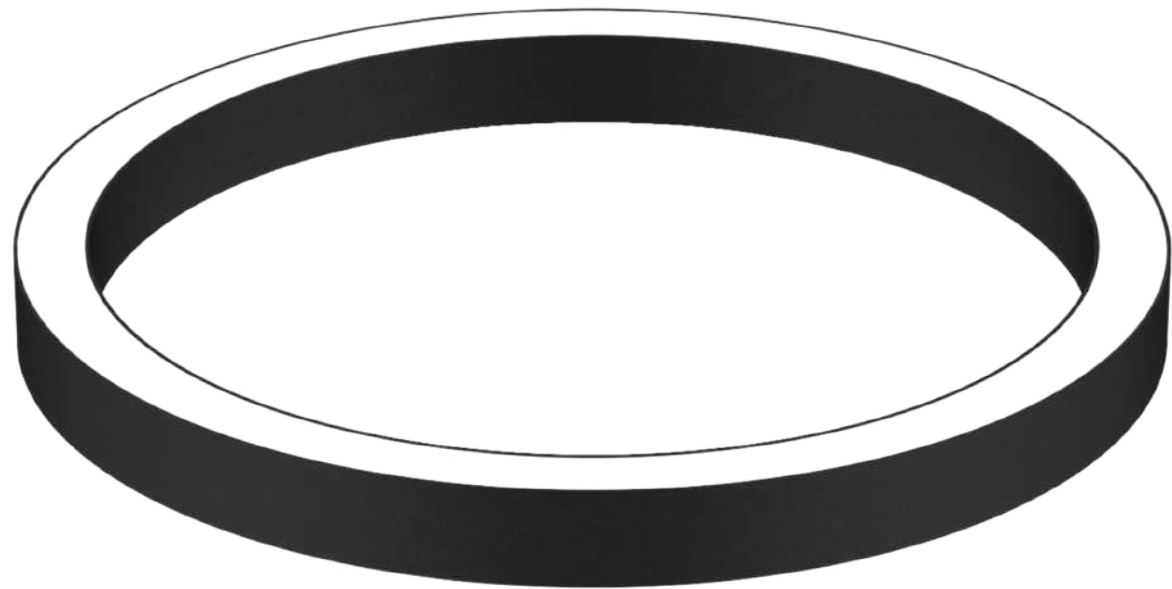

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light .distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防炫效果好

应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XR6080-610	610*60*80mm(2FT)	30W	5100Lm	3000Lm
	XR6080-910	910*60*80mm(3FT)	40W	6800Lm	4000Lm
	XR6080-1210	1210*60*80mm(4FT)	60W	10200Lm	6000Lm
	XR6080-1510	1510*60*80mm(5FT)	95W	16150Lm	9500Lm
	XR6080-2010	2010*60*80mm(7FT)	125W	21250Lm	12500Lm
	XR6080-2410	2410*60*80mm(8FT)	150W	25500Lm	15000Lm
	XR6080-3010	3010*60*80mm(10FT)	190W	32300Lm	19000Lm
	XR6080-4010	4010*60*80mm(10FT)	252W	42700Lm	25200Lm
	XR6080-5010	5010*60*80mm(16FT)	315W	53550Lm	31500Lm
	XR6080-10010	10010*60*80mm(32FT)	620W	10540Lm	62000Lm

PRODUCT OPTION 可选产品配置


CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DIMENSION OPTIONS

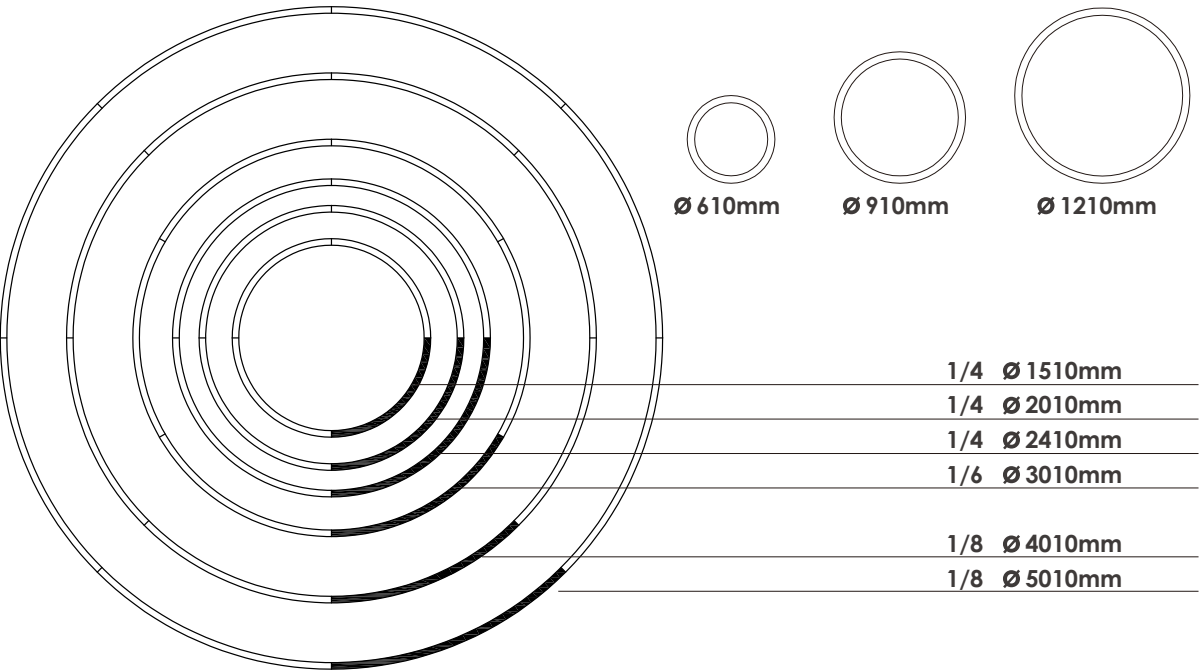

XR6080IN

INSIDE BLUE/CIRCULAR RING
内发光/圆环

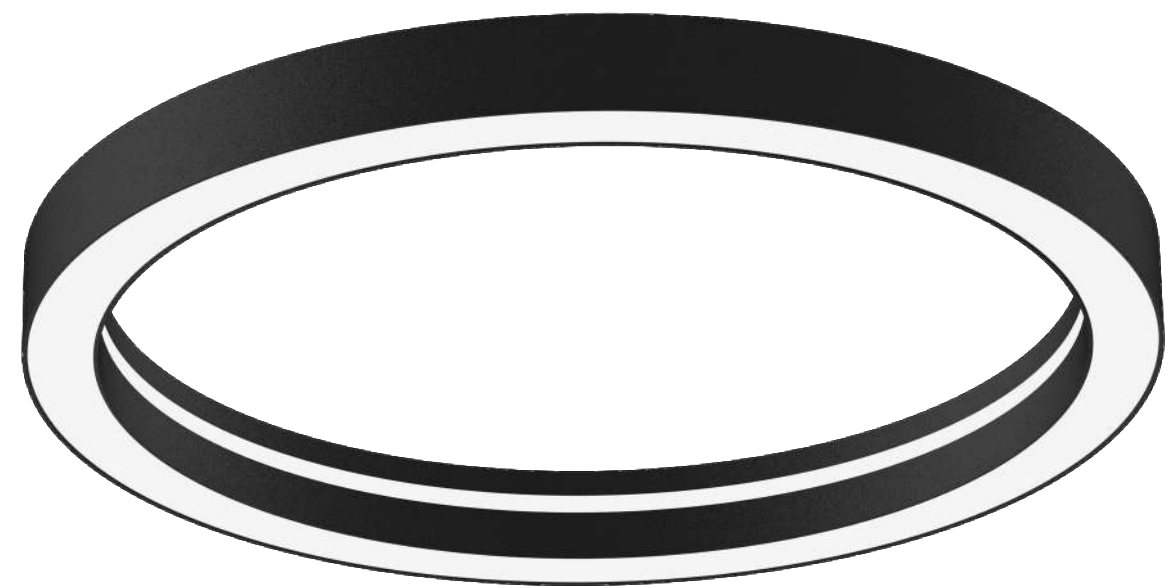

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light .distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XR6080IN-610	610*60*80mm(2FT)	30W	5100Lm	3000Lm
	XR6080IN-910	910*60*80mm(3FT)	40W	6800Lm	4000Lm
	XR6080IN-1210	1210*60*80mm(4FT)	60W	10200Lm	6000Lm
	XR6080IN-1510	1510*60*80mm(5FT)	95W	16150Lm	9500Lm
	XR6080IN-2010	2010*60*80mm(7FT)	125W	21250Lm	12500Lm
	XR6080IN-2410	2410*60*80mm(8FT)	150W	25500Lm	15000Lm
	XR6080IN-3010	3010*60*80mm(10FT)	190W	32300Lm	19000Lm
	XR6080IN-4010	4010*60*80mm(10FT)	252W	42700Lm	25200Lm
	XR6080IN-5010	5010*60*80mm(16FT)	315W	53550Lm	31500Lm
	XR6080IN-10010	10010*60*80mm(32FT)	620W	10540Lm	62000Lm

PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DIMENSION OPTIONS

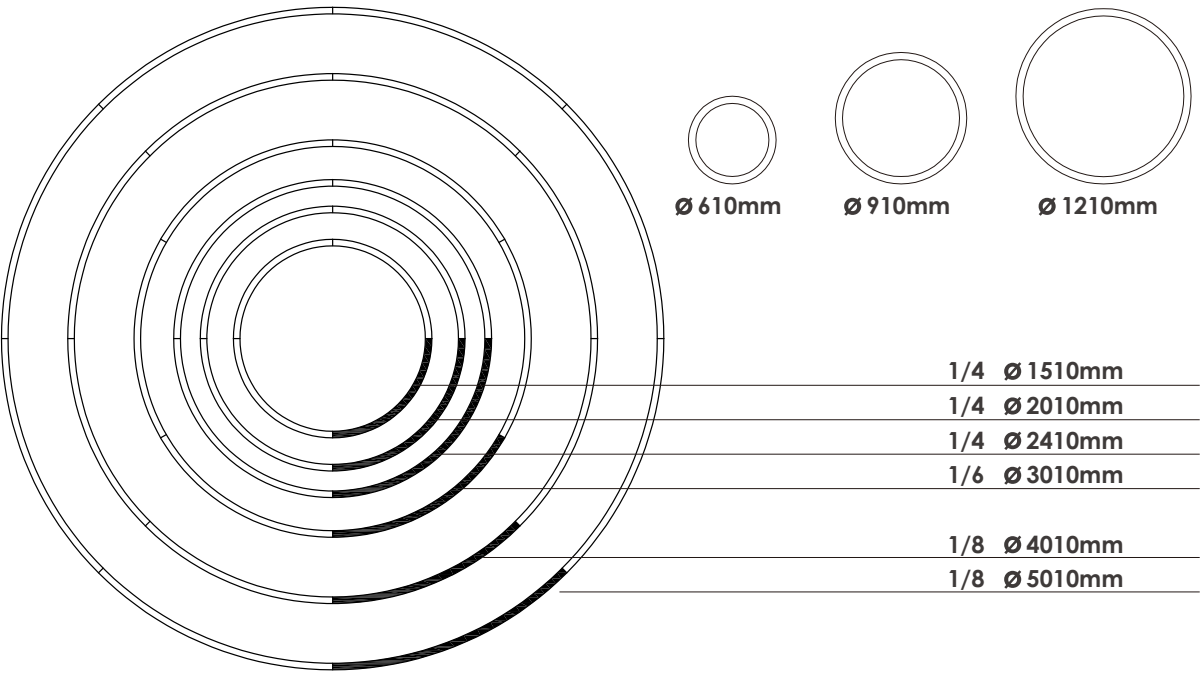





Barto Offices | Architecture and Construction: CASBRO.




Murex Offices | Architecture and Lighting Design: Collective Architecture.

XR7042

RECESSED CIRCULAR RING

嵌入式圆环

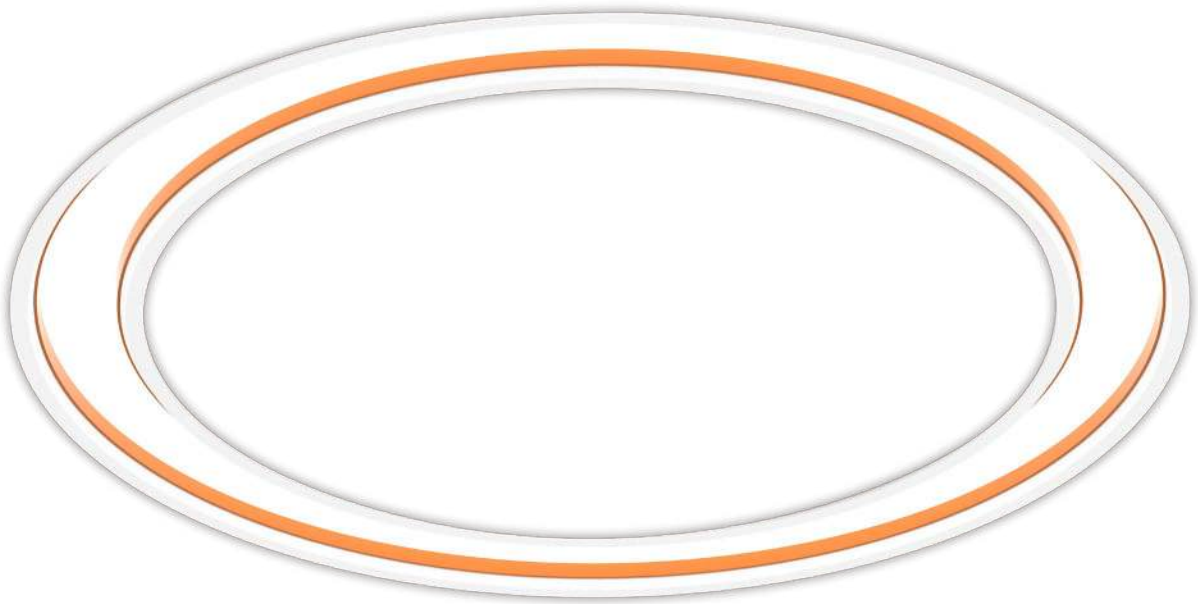

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light .distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数


	Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XR7042-620	620*70*42mm	30W	5100Lm	1500Lm
	XR7042-920	920*70*42mm	40W	6800Lm	2000Lm
	XR7042-1220	1220*70*42mm	60W	10200Lm	3000Lm
	XR7042-1520	1520*70*42mm	95W	16150Lm	4750Lm
	XR7042-2020	2020*70*42mm	125W	21250Lm	6250Lm
	XR7042-2420	2420*70*42mm	150W	25500Lm	7500Lm
	XR7042-3000	3020*70*42mm	190W	32300Lm	9500Lm
	XR7042-4000	4020*70*42mm	252W	42700Lm	12600Lm
	XR7042-5000	5020*70*42mm	315W	53550Lm	15750Lm
	XR7042-10000	10020*70*42m	620W	10540Lm	31000Lm

PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

DIMENSION OPTIONS

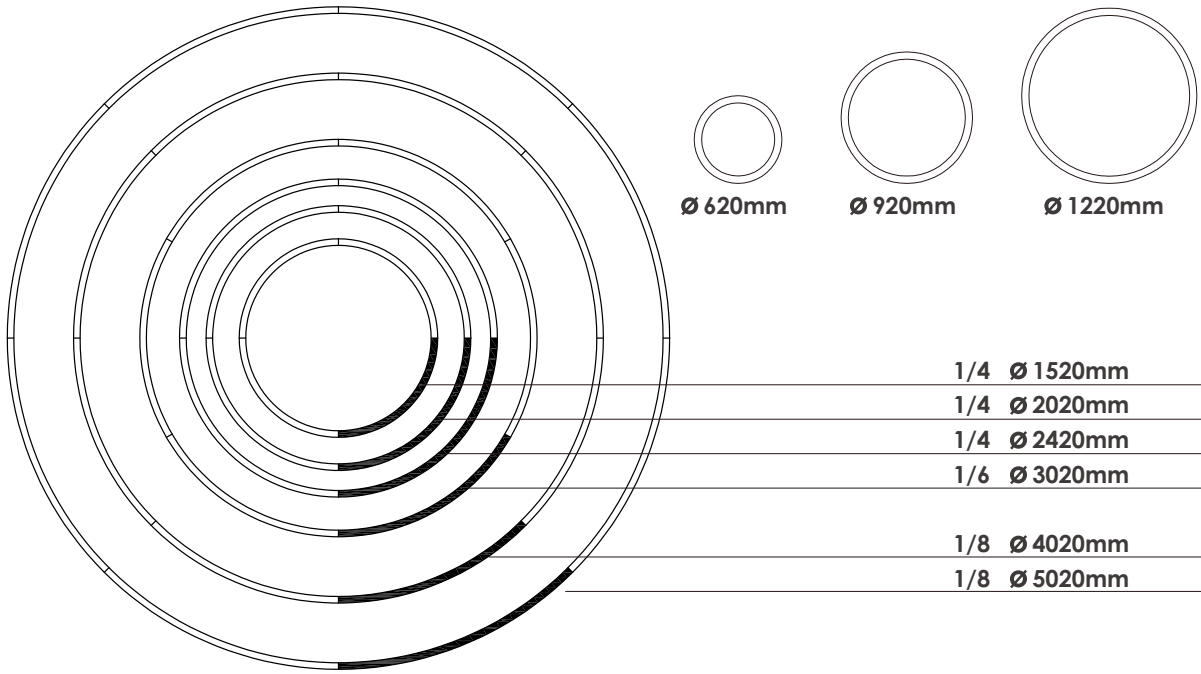

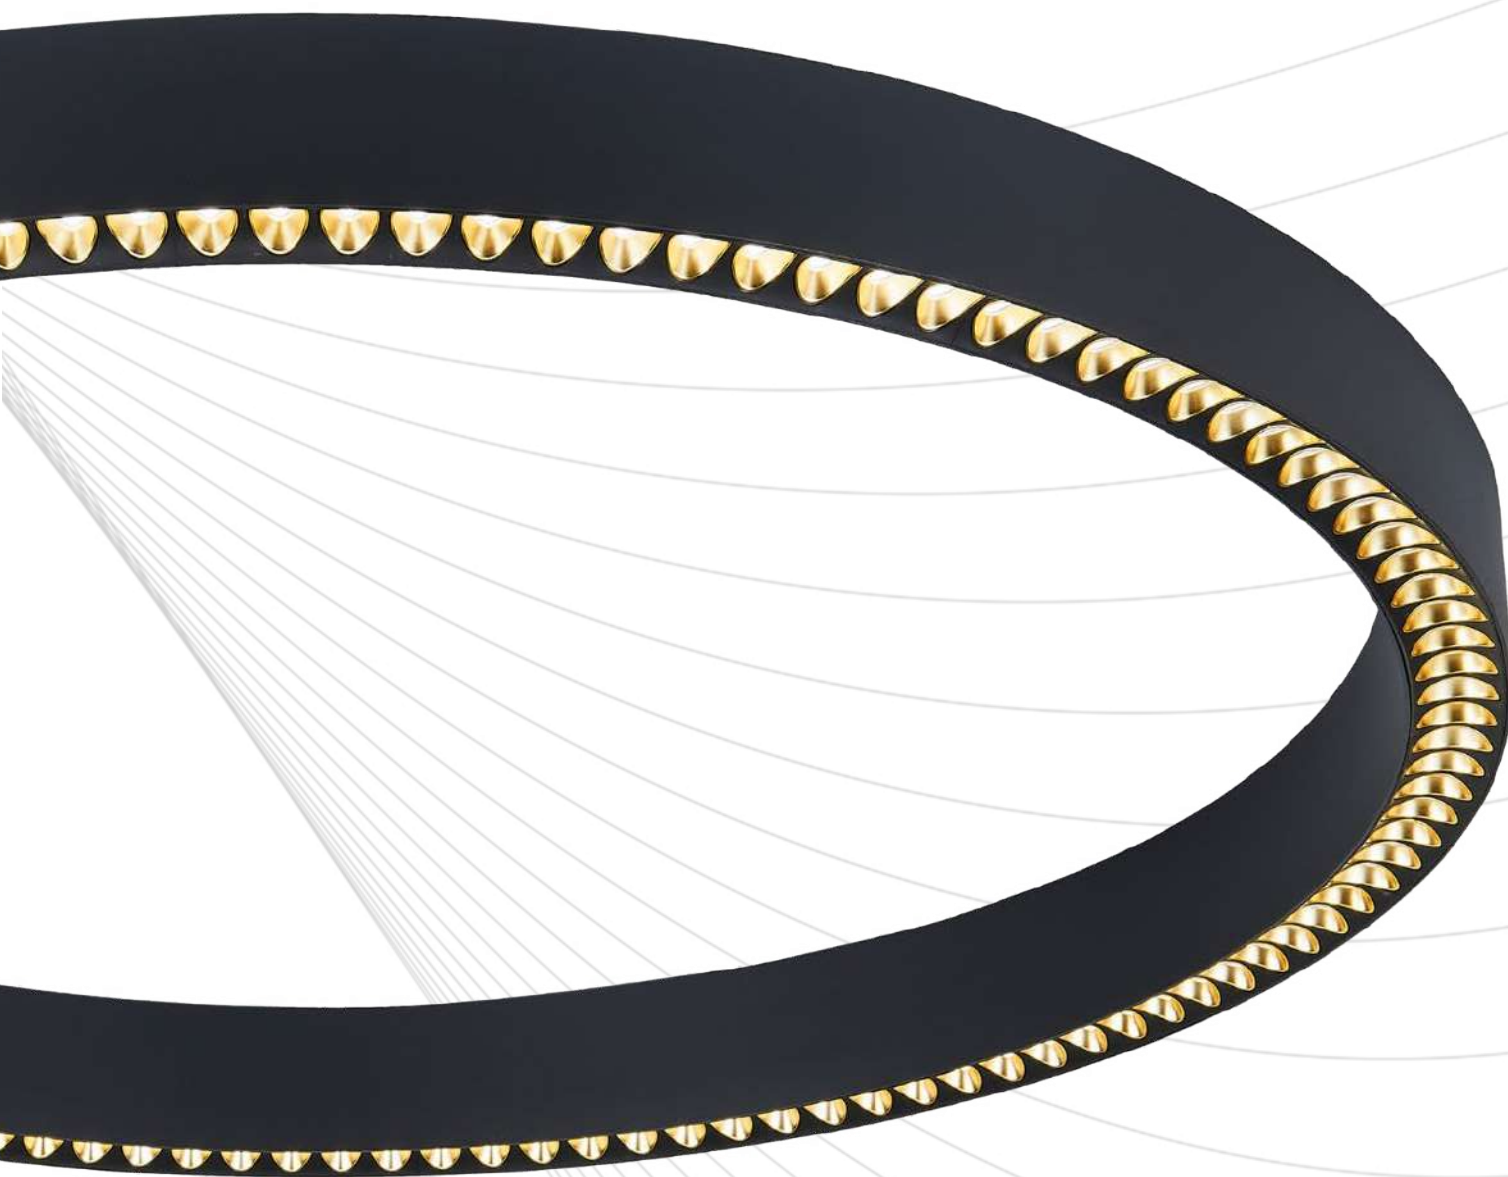

OPTICS CURVE

- Patented oval lens reflector design for superior light control.
- Multiple solutions available to meet different project requirements.
- DIY flexibility allows clients to customize and choose according to their needs.
- High-efficiency light distribution with no shadows and anti-glare performance.
- Can be configured as curves, circles, or straight lines.
- Easily connected to form custom shapes as requested.

08
Color Options

05
Size Options



03
Dimming Options

02
Mounting Options



3870L2

LENS
透镜

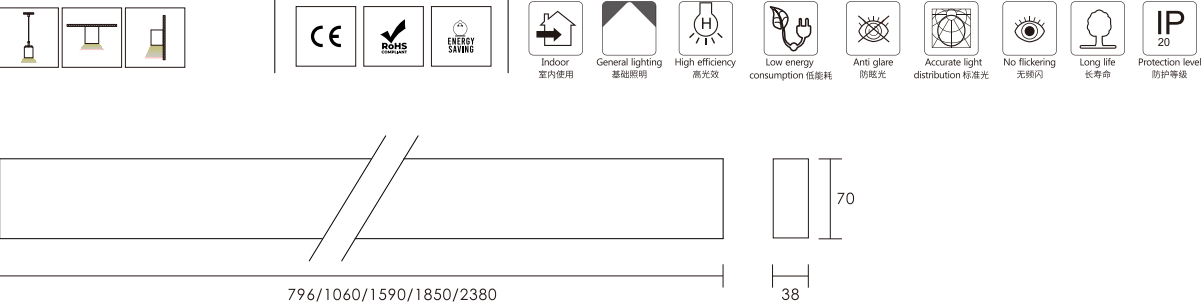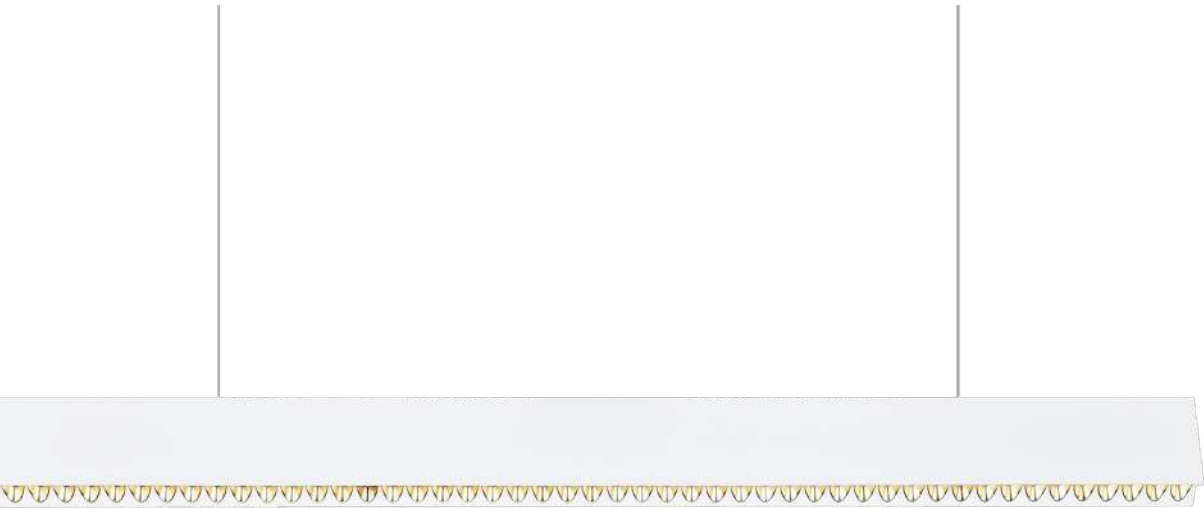

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Distinguished end-caps,No screw to be appeared.No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
无螺丝不漏光端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	LS3870L2-1060	1060*38*70mm	24W	4080Lm	2160Lm
	LS3870L2-1590	1590*38*70mm	36W	6120Lm	3240Lm
	LS3870L2-1850	1850*38*70mm	40W	6800Lm	3600Lm
	LS3870L2-2380	2112*38*70mm	48W	8160Lm	4320Lm


PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☒ 4000K ☒ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线



Accessories 配件



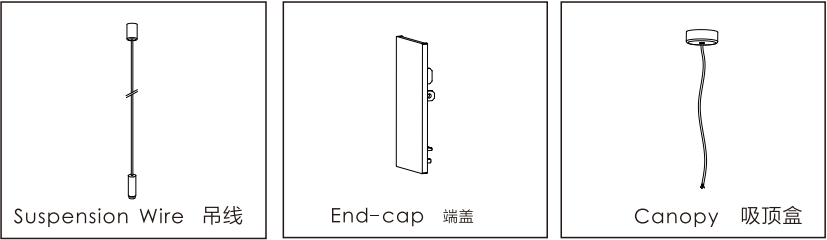




UGR < 19


- Patented oval lens reflector design for precise light control.
- Multiple solutions available to meet diverse project requirements.
- DIY flexibility allows clients to customize and select according to their needs.
- High-efficiency light distribution with no shadows and anti-glare performance (UGR <19).
- Configurable as curves, circles, or straight lines.
- Easily connected to form custom shapes as requested.

UGR < 19

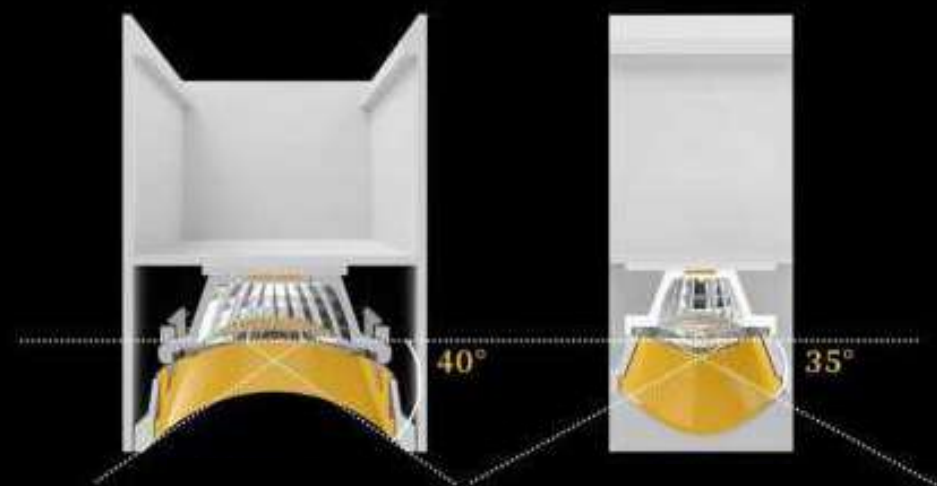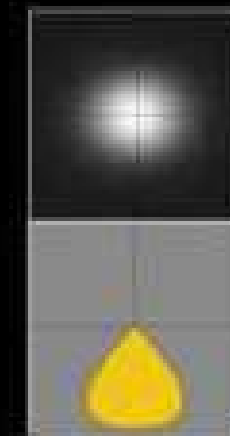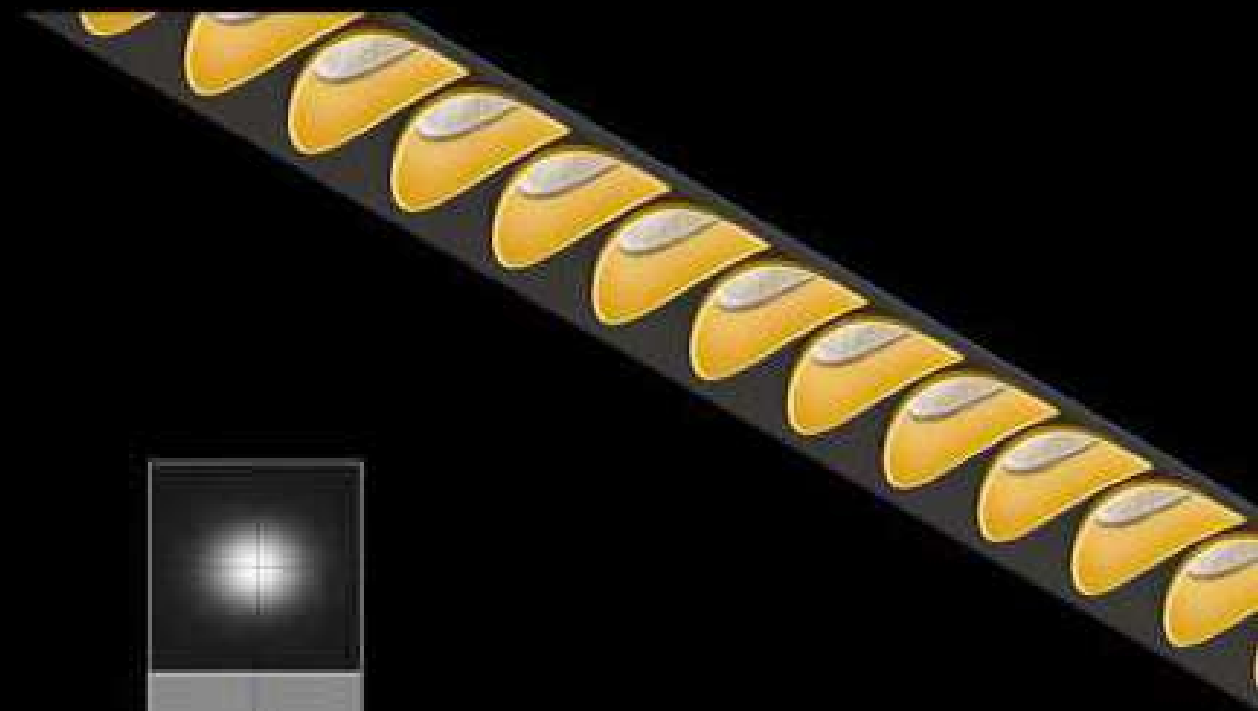

XR3870

CIRCULAR RING
圆环



PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light .distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散型控光罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XR3870-300	300*38*70mm	18W	3060Lm	1500Lm
	XR3870-450	450*38*70mm	24W	4080Lm	2160Lm
	XR3870-650	650*38*70mm	40W	5400Lm	3600Lm
	XR3870-900	900*38*70mm	60W	10200Lm	5400Lm
	XR3870-1200	1200*38*70mm	72W	12240Lm	6480Lm
	Item No. 产品型号	Dimension 产品尺寸	Power 功率	LED Output LED光通量	System Output 灯具光通量
	XR3870U-300	300*38*70mm	27W	4590Lm	2430Lm
	XR3870U-450	450*38*70mm	36W	6120Lm	3240Lm
	XR3870U-650	650*38*70mm	60W	10200Lm	5400Lm
	XR3870U-900	900*38*70mm	90W	15300Lm	8100Lm
	XR3870U-1200	1200*38*70mm	108W	18360Lm	9720Lm

PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor


DIMENSION OPTIONS

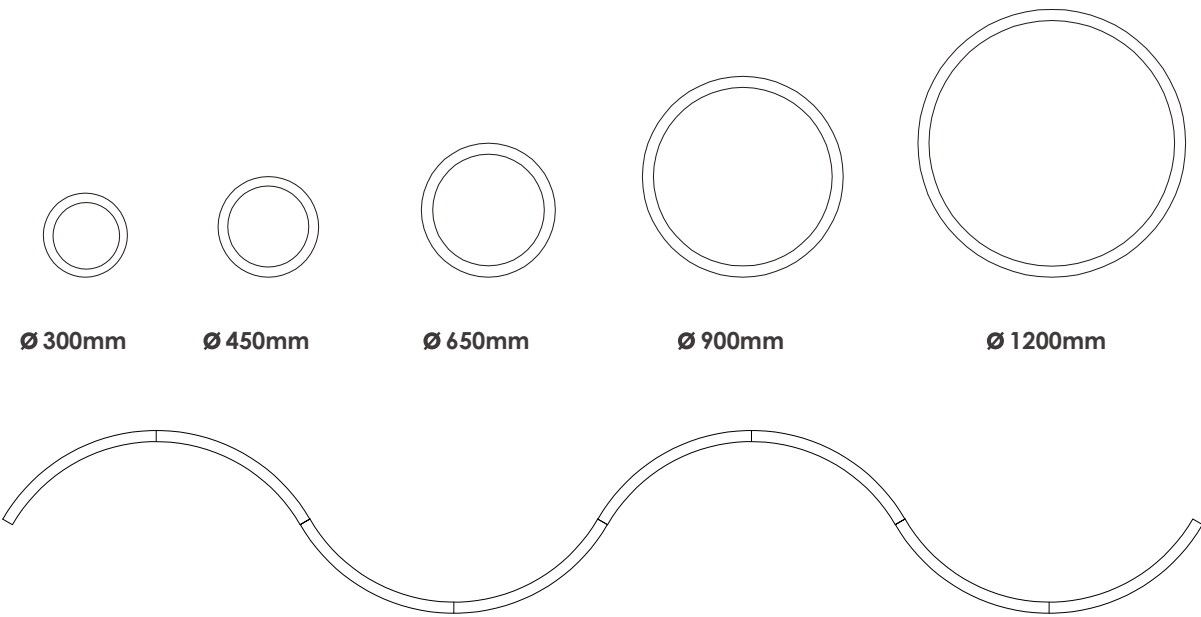



1. Pastelería JO | Interiors and Lighting Design: Bassi Design | 2. BNP Paribas Cardiff | Architecture and Lighting Design: Grupo E.
3. BLCK COFFE AND BAR: Architecture and Interiors: Dual Arquitectas. | 4. BCI PAGOS Office . Architecture and Lighting Design: Collective Architecture.

Indura Offices | Architecture: Armas Elton Arquitectos. | Lighting Design: Diseño de Luz.

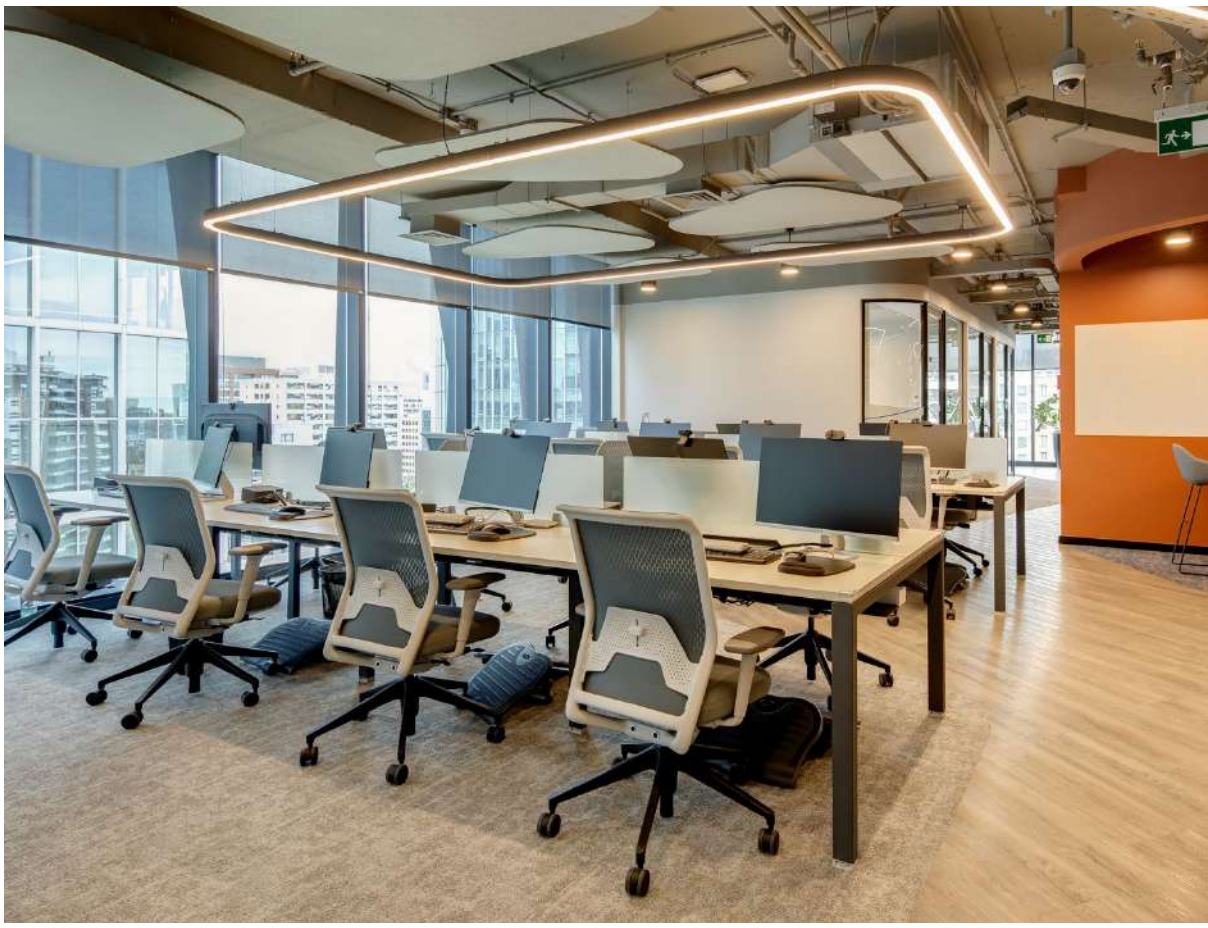

ISA ENERGIA Offices. Architecture and Construction: CASBRO.

1 - 2. Golden Oak Offices | Architecture and Lighting Design: Espiral Arquitectos. | 3. MK Offices | Architecture and Lighting Design: OArquitectos.
4 - 5. ISA ENERGIA Offices | Architecture and Construction: CASBRO.