
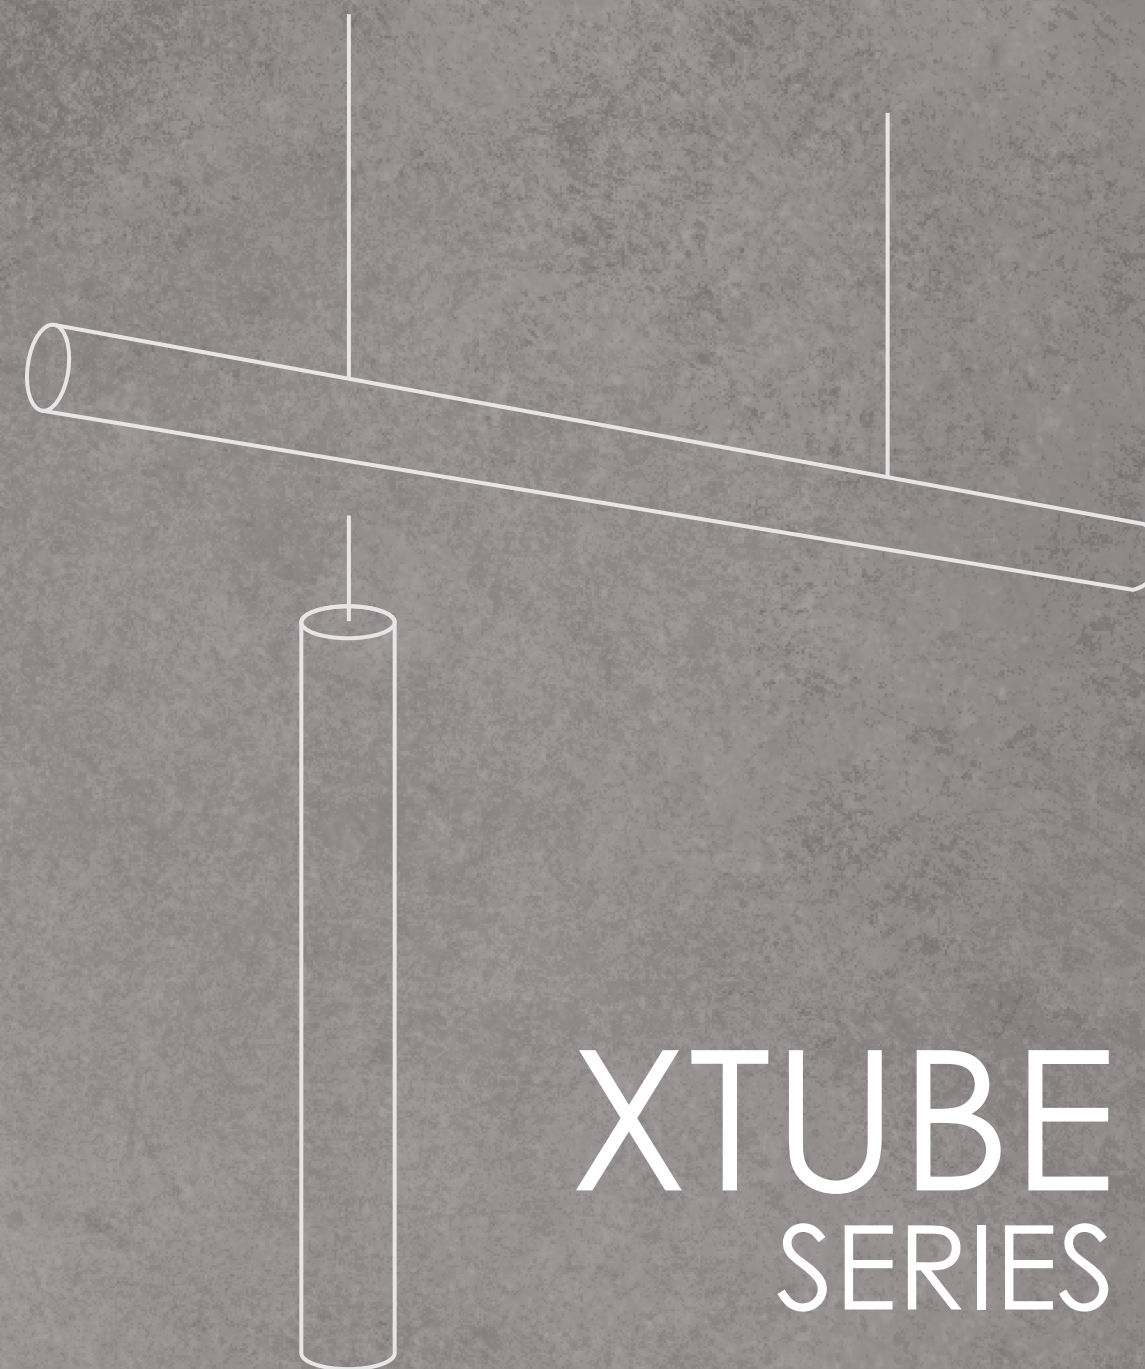


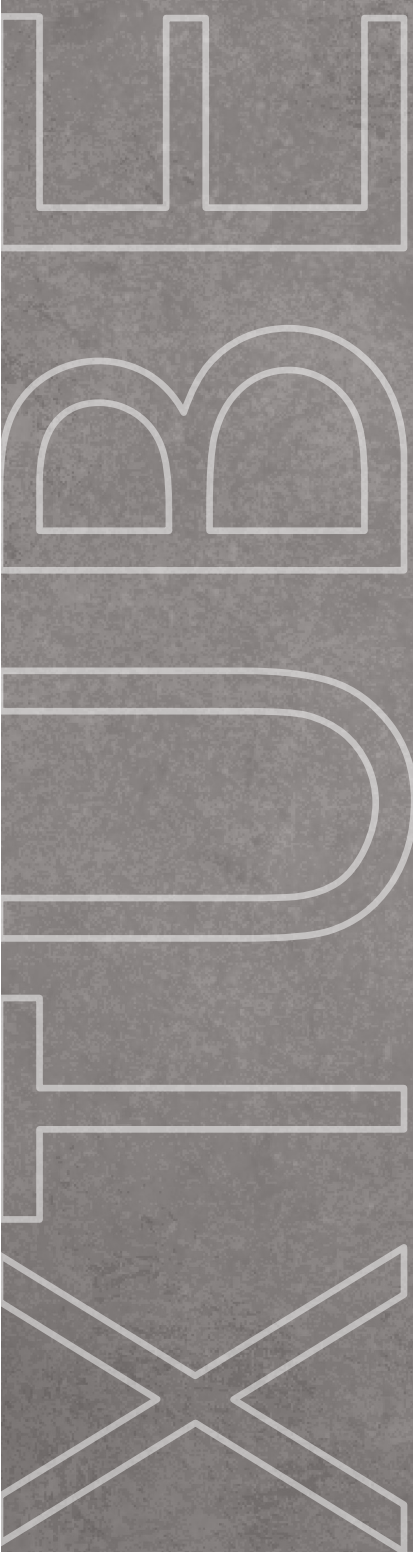

XTUBE SERIES

HORIZONTAL SUSPENSION
VERTICAL SUSPENSION

XTUBE SERIES

HORIZONTAL SUSPENSION | VERTICAL SUSPENSION

Designed as a tubular LED profile, XTUBE creates an impressive 360° or 270° lighting effect, delivering both functionality and unique visual impact.

Its versatile design allows horizontal or vertical suspension, adapting seamlessly to different architectural concepts.

Available in various sizes, it offers flexible solutions for any type of project, from technical applications to bold and out-of-the-box designs.





T60

270DEGREE-ILLUMINATING
TUBULAR









Indoor
室内使用

General lighting
基础照明

High efficiency
高光效

Low energy
consumption 低能耗


Anti glare
防眩光

Accurate light
distribution 精准光

No flickering
无频闪

Long life
长寿命

Protection level
防护等级



570/1130/1410/1690/2250
(2FT/4FT/5FT/6FT/8FT)

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Plastic end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。

寿命长达5万小时，光衰小、减少后期维护费用。

塑料端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。

灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。

高透光扩散PC罩，出光均匀，防炫效果好

应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。


TECHNICAL DATA 技术参数

	Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
	LT60-600	570*D60mm(2FT)	18W	3060Lm	1800Lm
	LT60-1200	1130*D60mm(4FT)	36W	6120Lm	3600Lm
	LT60-1500	1410*D60mm(5FT)	45W	7650Lm	4500Lm
	LT60-1800	1690*D60mm(6FT)	54W	9180Lm	5400Lm
	LT60-2400	2250*D60mm(8FT)	72W	12240Lm	7200Lm

PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☒ 4000K ☒ 5000K ☒ 6000K
CRI	☒ 82+ ☒ 90+ ☒ 95+
Finish	☒ White ☒ Black ☒ Silver ☒ Custom Color
Dimming	☒ On/off ☒ 1-10V ☒ DALI ☒ Color Changing
Emergency	☒ None ☒ 1.5 hours,half power
Sensor	☒ None ☒ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

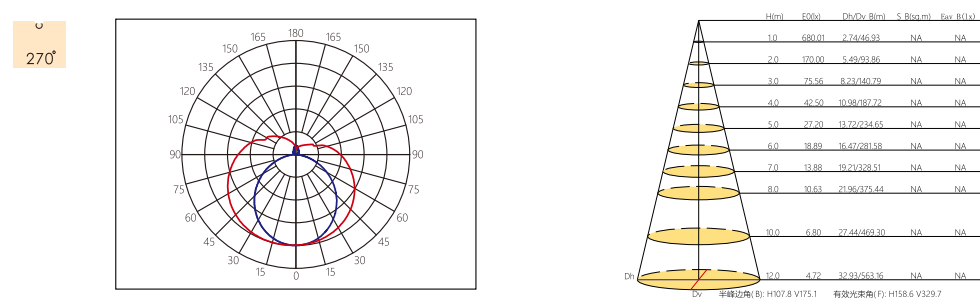

TECH K Offices | Architecture and Lighting Design: Central Corp.

T80

360DEGREE-ILLUMINATING
TUBULAR





TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LT80-600	570*D80mm(2FT)	18W	3060Lm	1800Lm
LT80-1200	1130*D80mm(4FT)	36W	6120Lm	3600Lm
LT80-1500	1410*D80mm(5FT)	45W	7650Lm	4500Lm
LT80-1800	1690*D80mm(6FT)	54W	9180Lm	5400Lm
LT80-2400	2250*D80mm(8FT)	72W	12240Lm	7200Lm

PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☒ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor

LIGHT DISTRIBUTION CURVE 光强分布曲线

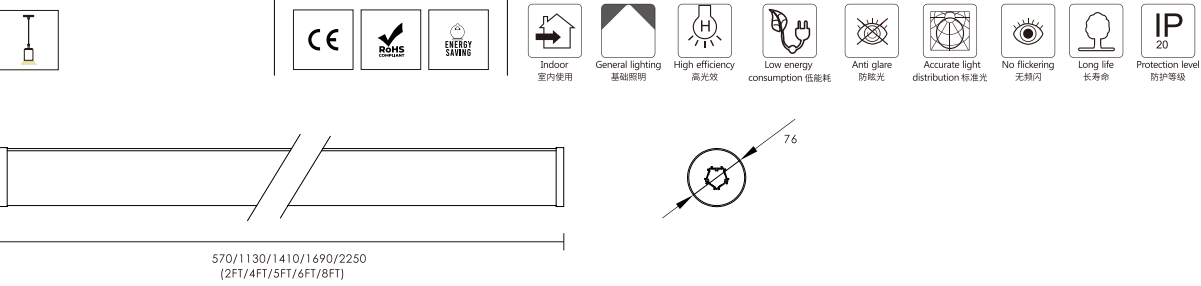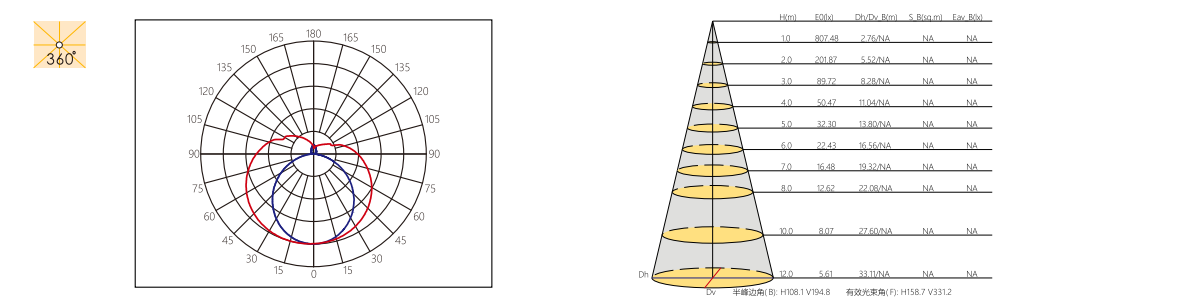

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Plastic end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。塑料端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散PC罩，出光均匀，防炫效果好


应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。



Launch Coworking Vespuccio | Architecture: Launch Coworking.

T120

270DEGREE-ILLUMINATING
TUBULAR

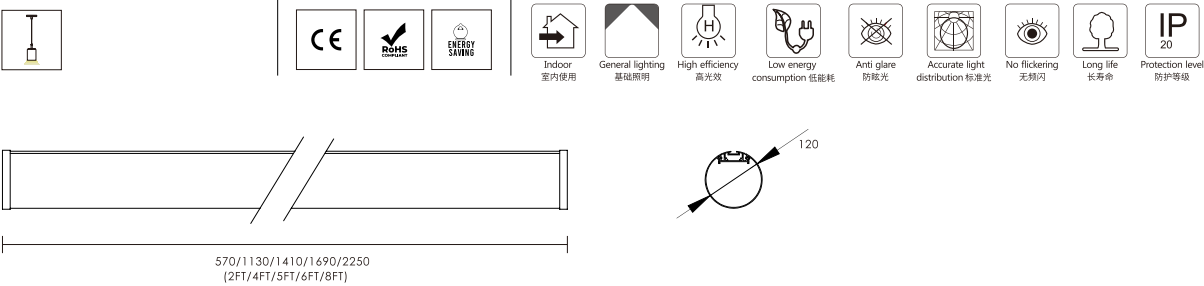

PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip,
- Options for 1-10V dimming,dali dimming and color changing driver.
- Long lifespan up to 50000hours,low decay and low maintenance cost.
- Plastic end-caps,No screw to be appeared,No light leak.
- High grade aluminum,high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light distribution,no shawdon,anti-glare feature,easy installation to any shape.
- Application:Office,School,Hospital,Supermarket,Shopping Mall,Hotel,Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。
寿命长达5万小时，光衰小、减少后期维护费用。
塑料端盖，灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。
高透光扩散PC罩，出光均匀，防炫效果好
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
LT120-600	570*D120mm(2FT)	18W	3060Lm	1800Lm
LT120-1200	1130*D120mm(4FT)	36W	6120Lm	3600Lm
LT120-1500	1410*D120mm(5FT)	45W	7650Lm	4500Lm
LT120-1800	1690*D120mm(6FT)	54W	9180Lm	5400Lm
LT120-2400	2250*D120mm(8FT)	72W	12240Lm	7200Lm

PRODUCT OPTION 可选产品配置

CCT	☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K
CRI	☐ 82+ ☐ 90+ ☐ 95+
Finish	☐ White ☒ Black ☐ Silver ☐ Custom Color
Dimming	☐ On/off ☐ 1-10V ☐ DALI ☐ Color Changing
Emergency	☐ None ☐ 1.5 hours,half power
Sensor	☐ None ☐ Motion and daylight sensor





LIGHT DISTRIBUTION CURVE 光强分布曲线

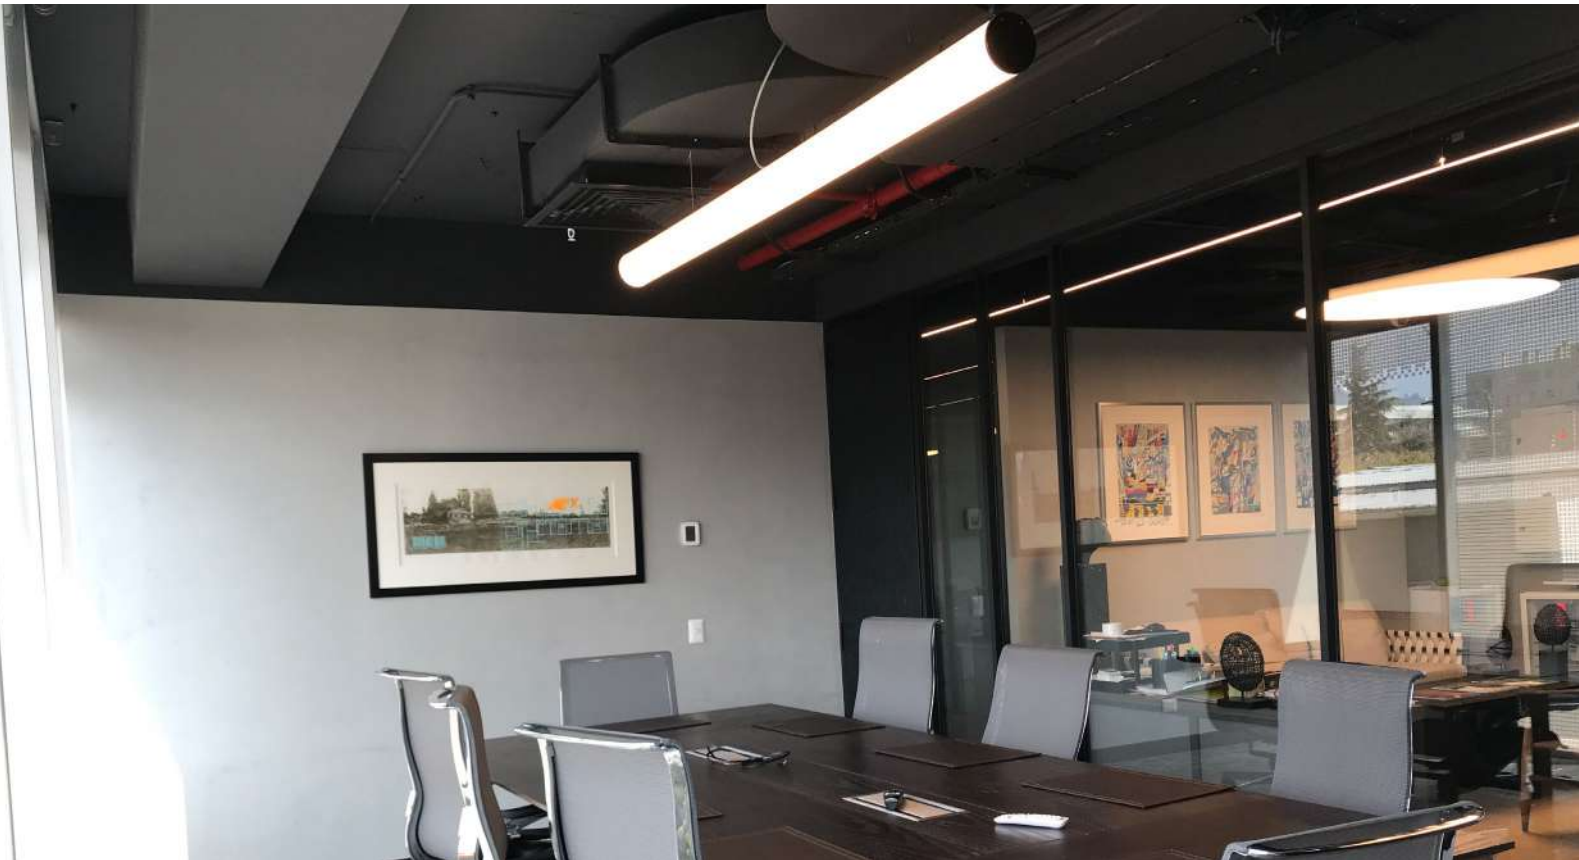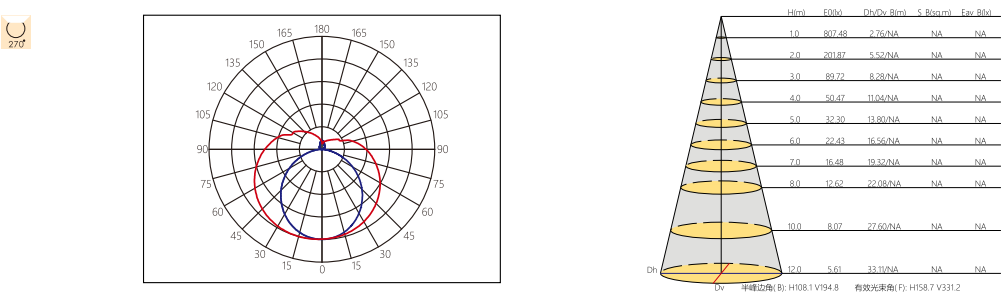

IGS GROUP Offices | Architecture: Elton y Leniz Arquitectos | Lighting Design: LEVO Studio.



1. Showroom Sien Kitchen | Architecture: Sien Kitchen.
2. Launch Coworking Vespucio | Architecture: Launch Coworking.

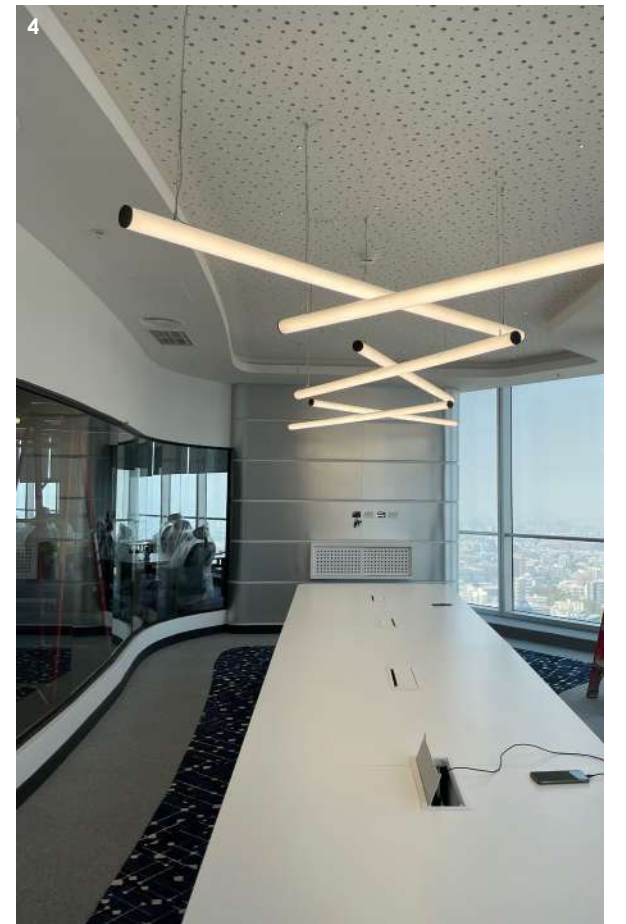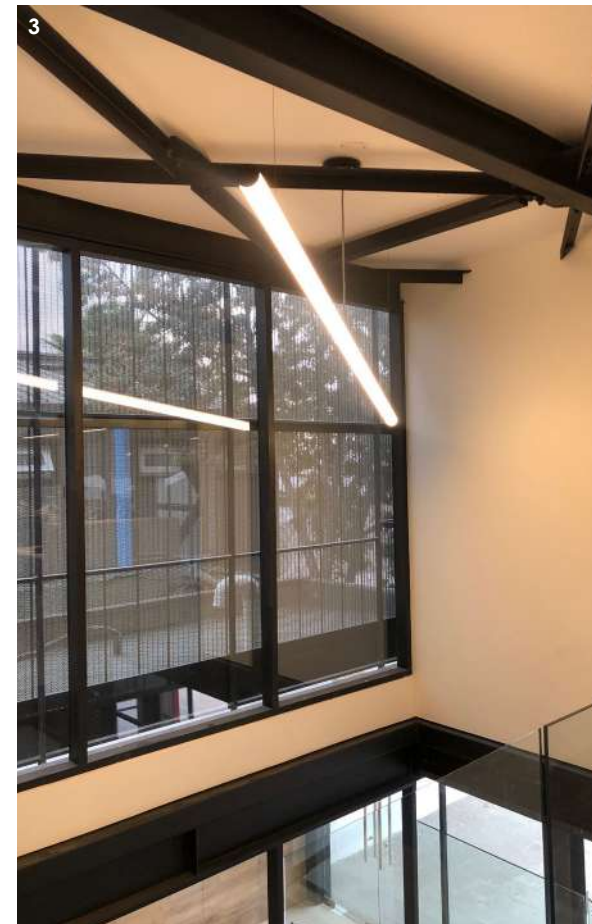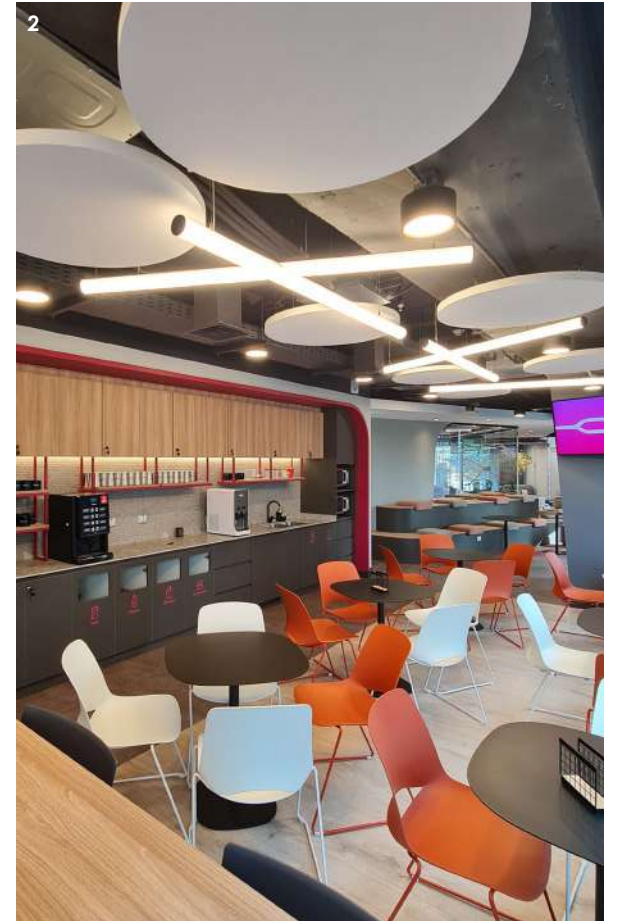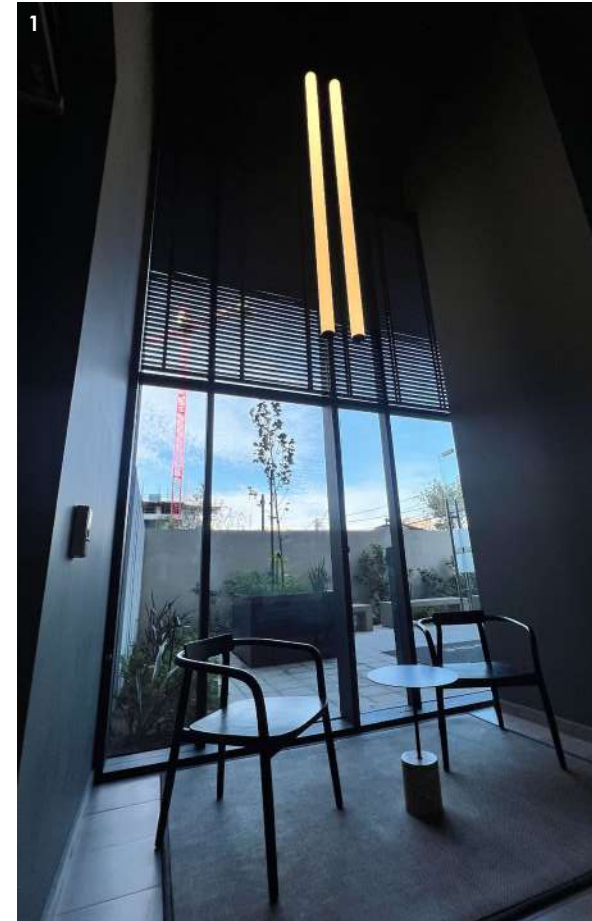

1. Building Hall | Architecture and Design: Orlando Gatica Studio | 2. MUREX Offices | Architecture and Lighting Design: Collective Architecture.
3. JRI Investigation Center | Architecture: Toro & Sitja . 4. GLOBANT Offices | Architecture and Lighting Design: Ael Spaces.